





||
:
!





	220Vac		240Vac	
--	--------	--	--------	--

	100Vac		305Vac	
	47Hz		63Hz	
			0.7A	

(220Vac)			70A	
(277Vac)			75A	
			3W	220Vac/50Hz
	0.96	0.98		220Vac/50Hz
	0.90			220-240Vac/50Hz 70-100%
		10%	12%	220Vac/50Hz
			20%	220-240Vac/50Hz 70-100%






--








SS-100GA LED

mA n


E^e

Vs. (/AOC)



----- Dimming Window ————— AOC Window

Vs. (Vin= 220Vac)

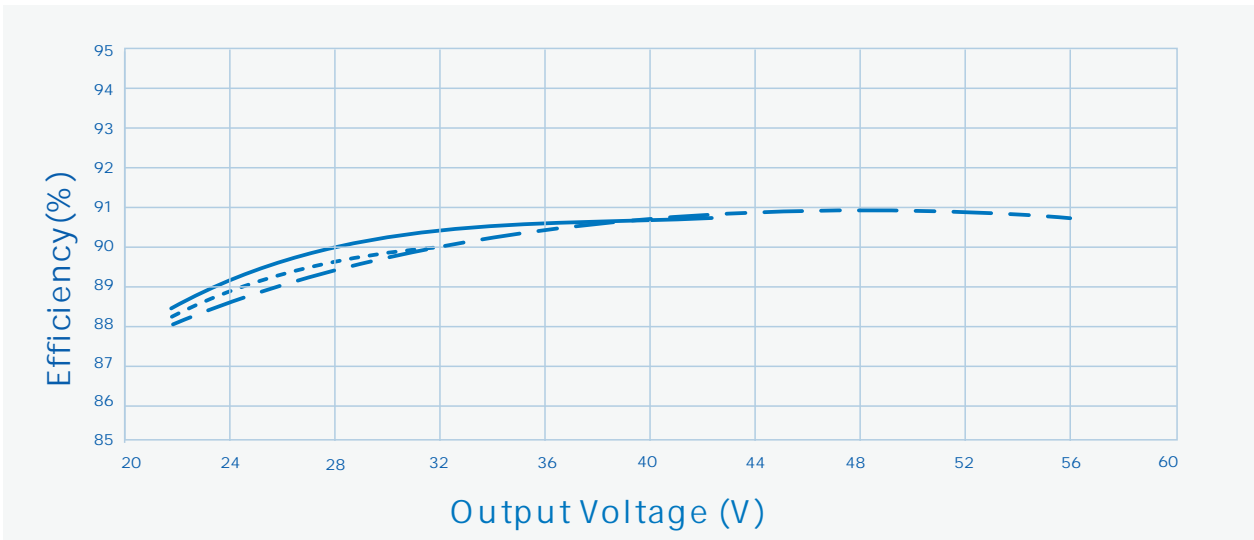

----- Io = 3200mA ————— Io = 2400mA - - - - Io = 1780mA






SS-100GA


LED

Vs.

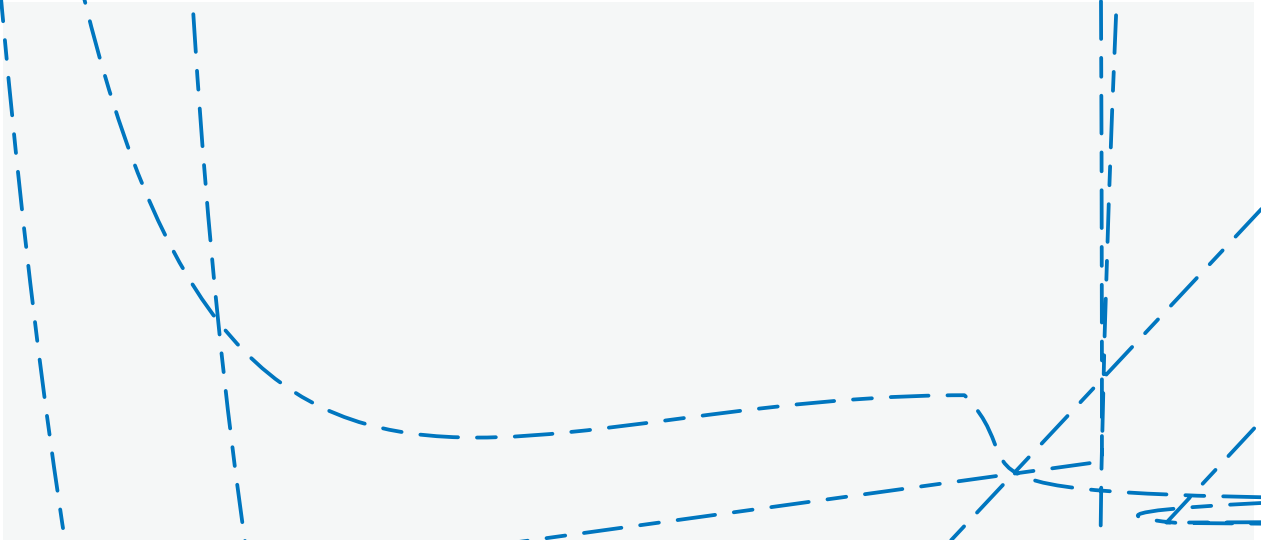

Pin 21









1 , , 704

2

- mm × × = 495× 385× 162;

- 14

- 0.64kg 10kg

-

GB 3873 83

1

RoHS

RoHS (2011/65/EU)

2015/863/EU





V00		2018/10/18	
V01	450mm	2019/07/20	
V02		2020/06/02	
V03	10-0V	2020/11/10	
V04		2021/07/02	
V05	5-0V	2021/09/25	

