

SOSEN LED Driver, Your Smart Choice

SS-100EP-56B LED

: SS-100EP-56B

: 96W LED

: V03

: 2021-09-02





120Vac,

0Hz, 空载
满载
120-

SS-100EP-56B LED

	28V		56V	28-36V
	36V		56V	$P_o = V_o \cdot I_o = 96W$
	1.71A		2.66A	2.66A 36V, 1.71A 56V
AOC	1.3A		2.66A	
			60V	
@ 120Vac	87.5%	89.5%		56V/1.71A
@ 220Vac	89.0%	91.0%		56V/1.71A
@ 277Vac	89.5%	91.5%		56V/1.71A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	










ê




v



SS-100EP-56B LED


Vs. (/AOC)

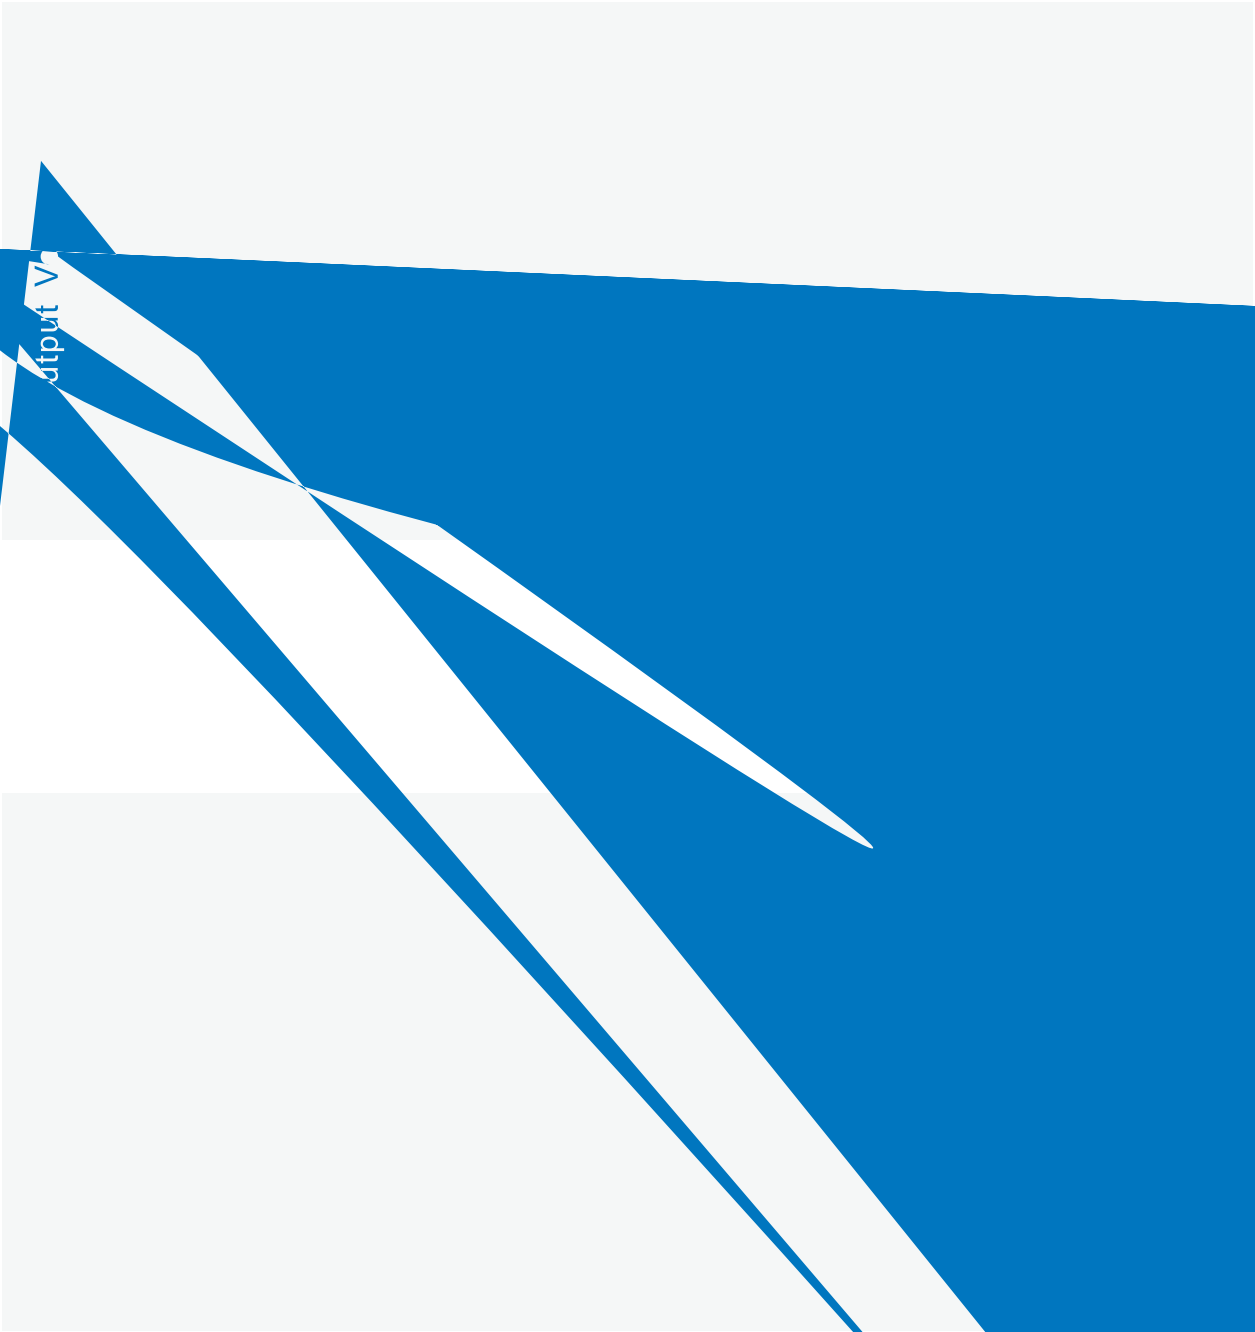




SS-100EP-56B LED

Vs.

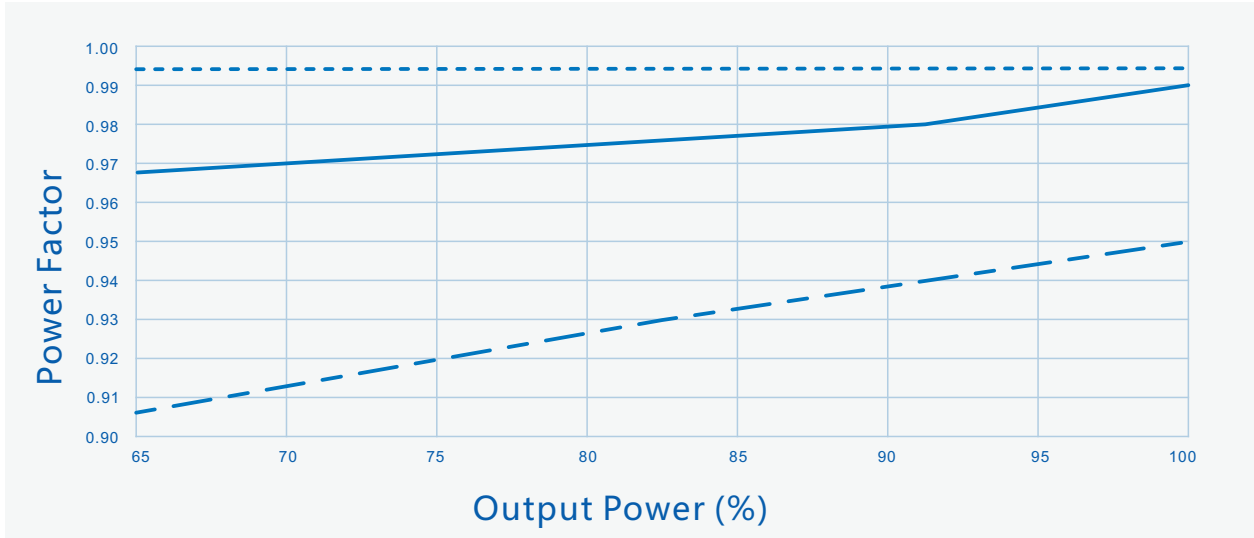


----- Vin=120Vac ————— Vin= 220Vac - . - . Vin=277Vac

Vs.


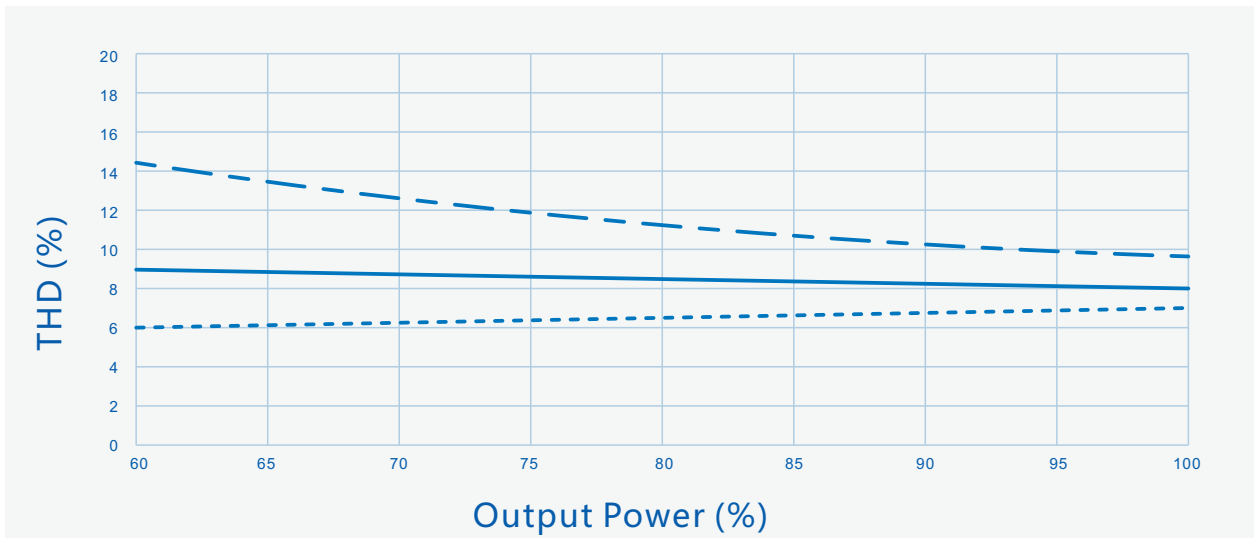


----- Vin=120Vac ————— Vin= 220Vac - . - . Vin=277Vac





Vs.





SS-100EP-56B LED



1 , , 704
2
3 " " " 60° SS-100EP
380cm² 115cm³; LED

- mm) : × × = 495×385×162;
- 20
- 0.49kg 11.5kg
-
.

适用于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU



SS-100EP-56B LED



V00		2020/06/18	
V01		2020/08/10	
V02		2020/10/10	
V03		2021/09/02	

