

SOSEN LED Driver, Your Smart Choice

SS-75EP-56B LED

: SS-75EP-56B

: 75W LED

: V03

: 2021-09-02

DRIVE

D DI

-5

91%

1-

保护：

10kV

P

P

型号



SS-75EP-56B LED



	120Vac		277Vac	
	108Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			0.8A	120Vac
			86W	120Vac
(120Vac)			80A	
(220Vac)			120A	冷机启动
(277Vac)			150A	冷机启动
			3W	220Vac/50Hz , 空载
	0.95	0.97		220Vac/50Hz , 满载
	0.90			120-277Vac/50Hz , 70-100%载
		10%	12%	220Vac/50Hz , 满载
			20%	120-277Vac/50Hz , 70-100%载



SS-75EP-56B LED

	28V		56V	28-36V
	36V		56V	$P_o = V_o \cdot I_o = 75W$
	1.35A		2.1A	2.1A 36V, 1.35A 56V
AOC	1.0A		2.1A	
			60V	
@ 120Vac	88.0%	89.5%		56V/1.35A
@ 220Vac	89.5%	91.0%		56V/1.35A
@ 277Vac	90.0%	91.5%		56V/1.35A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	





SS-75EP-56B LED

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015	✓	
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS		
/		
CE	EN55015:2013+A1:2015	
RE	EN55015:2013+A1:2015	
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (10kV 6kV)
	ANSI/C82.77-5-2017	B (6kV 6kV)
	IEC/EN 61000-4-12	B (6kV 6kV)

SS-75EP-56B LED




	UL	TUV	CCC	
	1600Vac	3000Vac	3750Vac	
	1600Vac	1500Vac	1875Vac	
	1600Vac	3000Vac	3750Vac	
	1600Vac	1000Vac	1000Vac	
	500Vac	1000Vac	1000Vac	
	500Vac	250Vac	500Vac	
	10MΩ		500Vdc	
	0.1Ω		25A/1min	
	0.75mA		277Vac	

1. EMC
 2. LN
 3. CCC
- IEC 60598-1:2014 10.2 " "

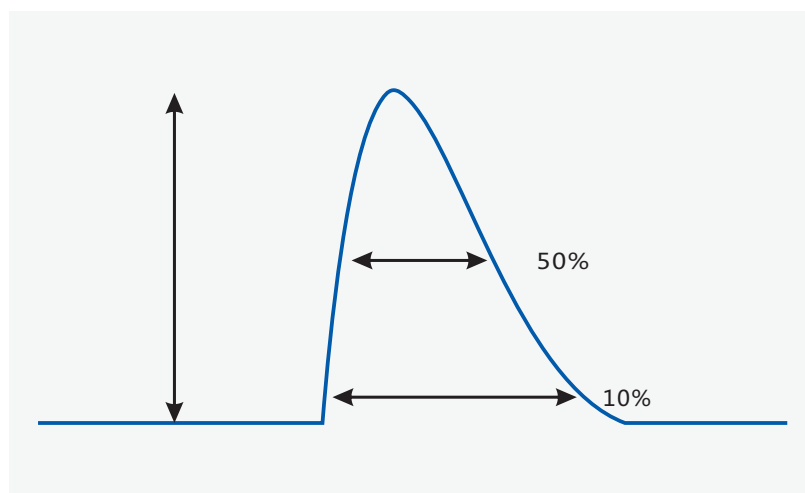


		T (@ 10%)	T (@ 50%)
120Vac	80A	200uS	
220Vac	120A		150uS
277Vac	150A	200uS	






SS-75EP-56B LED

Vs. (Vin=220Vac)

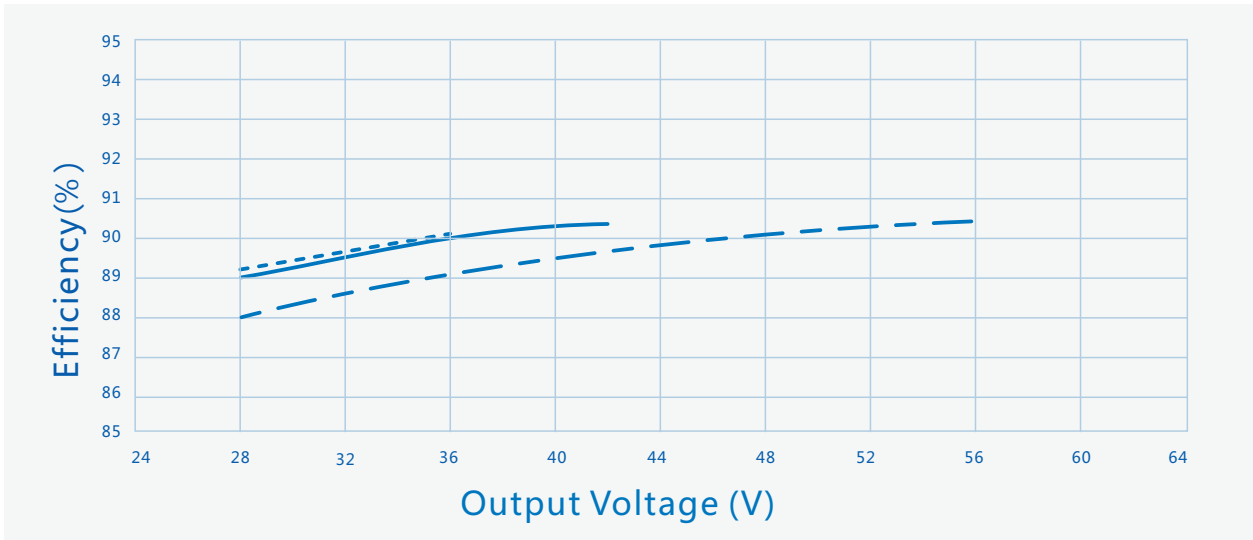

----- Io=2100mA ——— Io=1785mA - - - Io=1350mA


Vs. (Vin=277Vac)

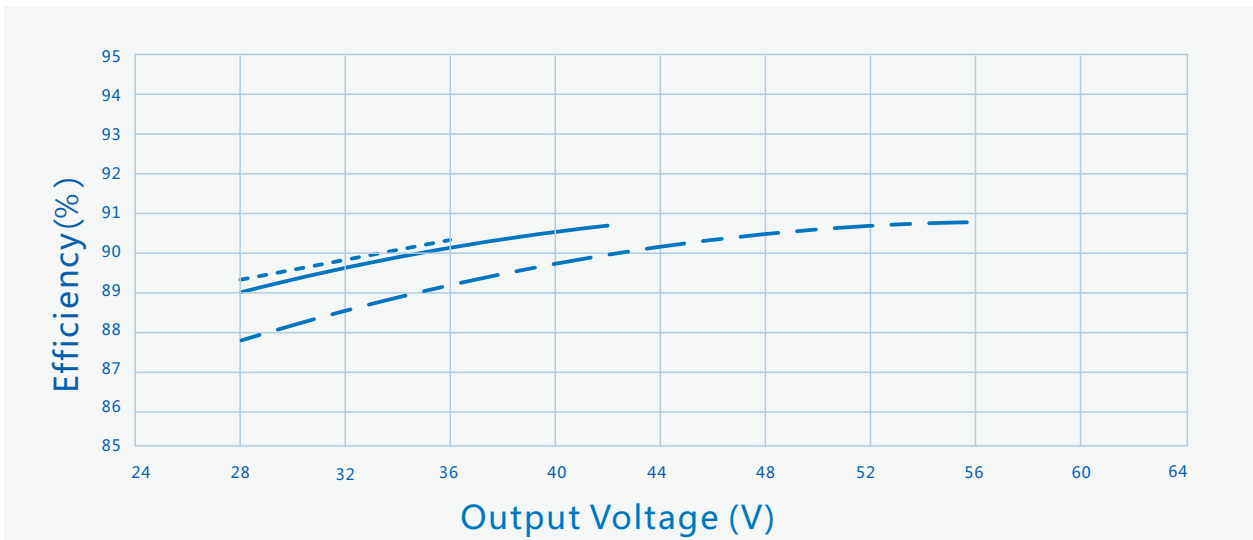


----- Io=2100mA ——— Io=1785mA - - - Io=1350mA



Vs.



Vs.




SS-75EP-56B LED

Vs.


(60)

Vs.

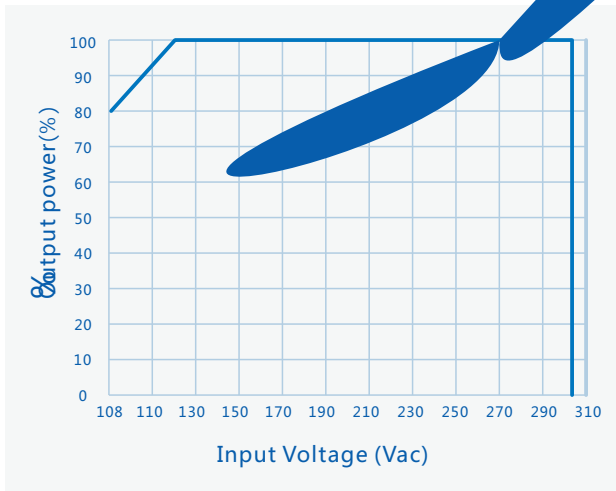

Vs.

Vs

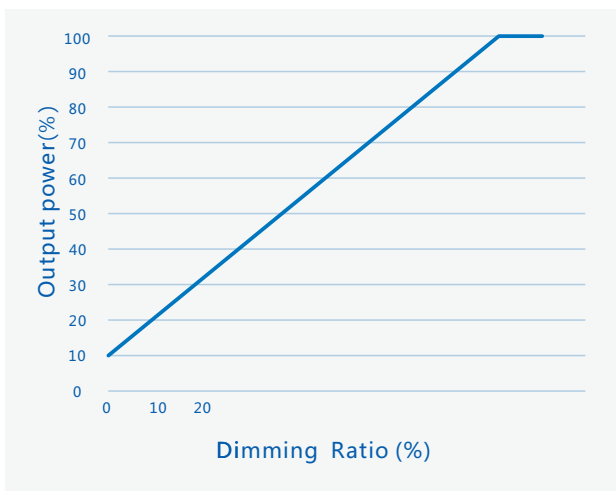



- mm) : × × = 495×385×162;
 - 20
 - 0.48kg 11.3kg
 -
 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

« B ? i
 a

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

SS-75EP-56B LED



V00		2020/06/18	
V01		2020/08/10	
V02		2020/10/10	
V03		2021/09/02	

