




	277Vac		480Vac	
	249Vac		528Vac	
	47Hz		63Hz	
			1.2A	













Vs. /AOC

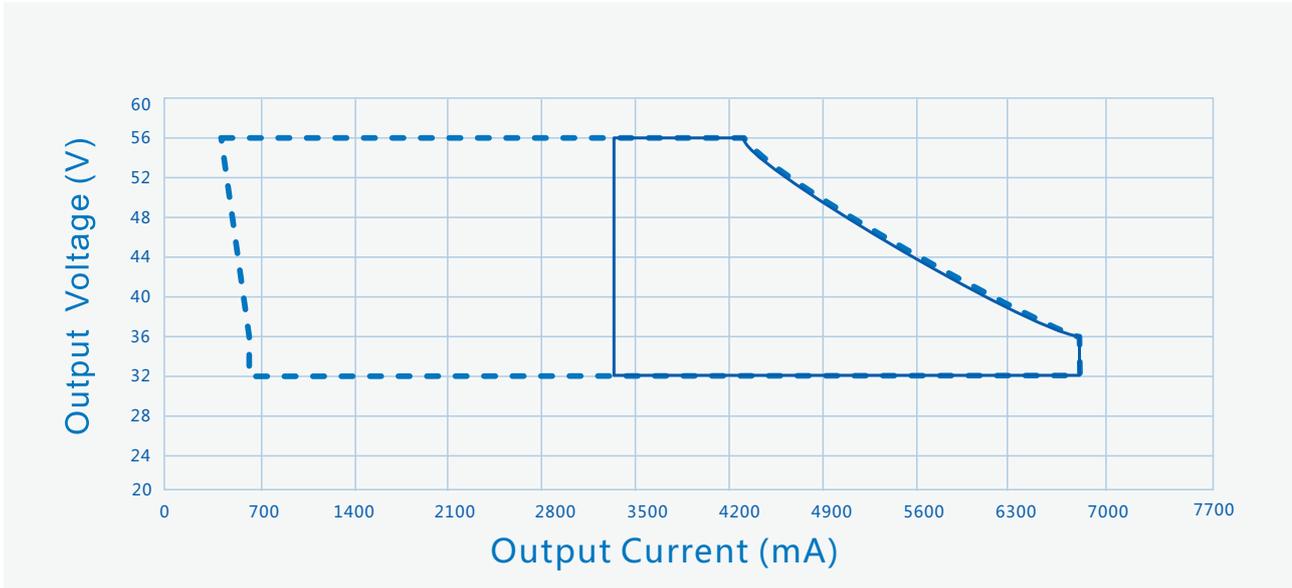

----- Dimming Window ————— AOC Window


Vs. (Vin=277Vac)

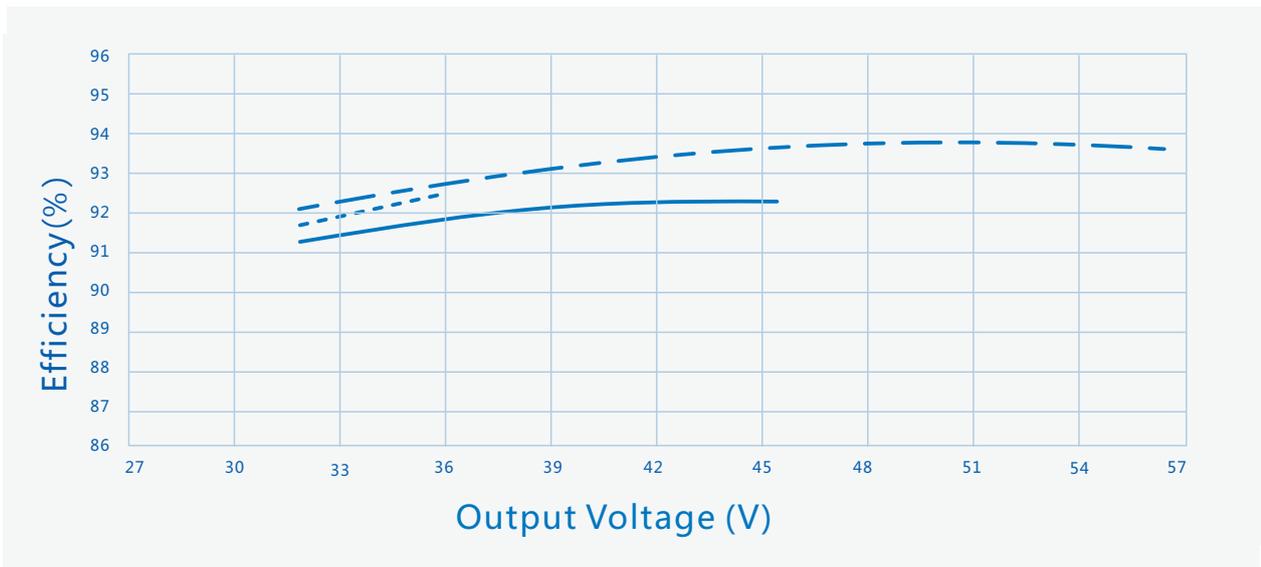

----- Io=6700mA ————— Io=5220mA - . - . Io=4300mA




Vs. (Vin=347Vac)

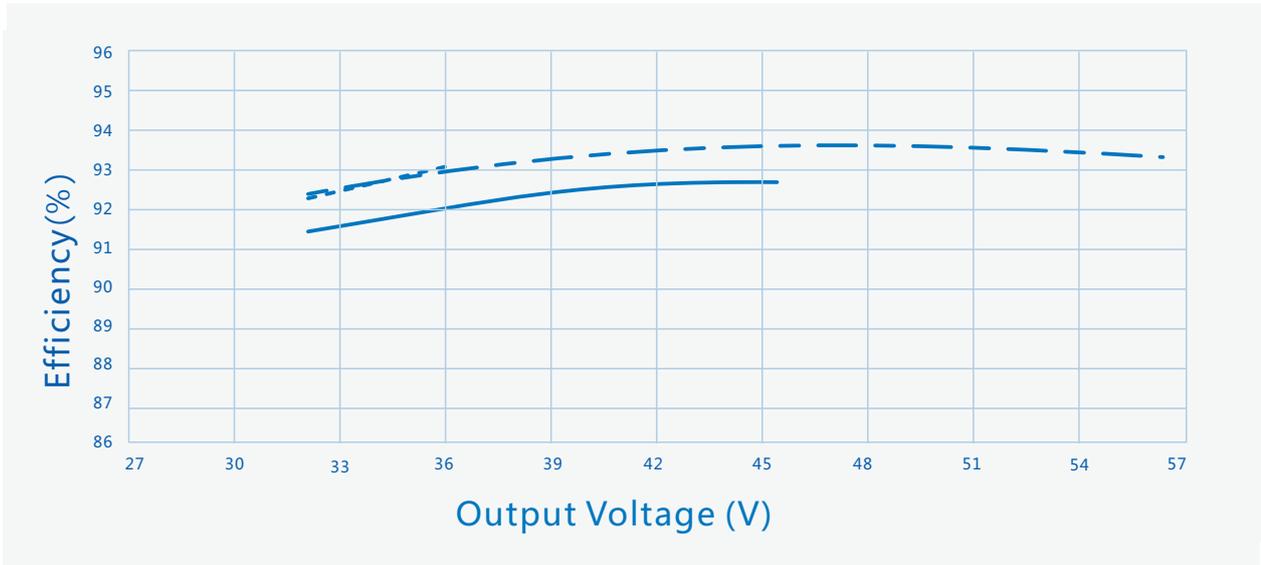

----- Io=6700mA ————— Io=5220mA - - - - Io=4300mA


Vs. (Vin=480Vac)

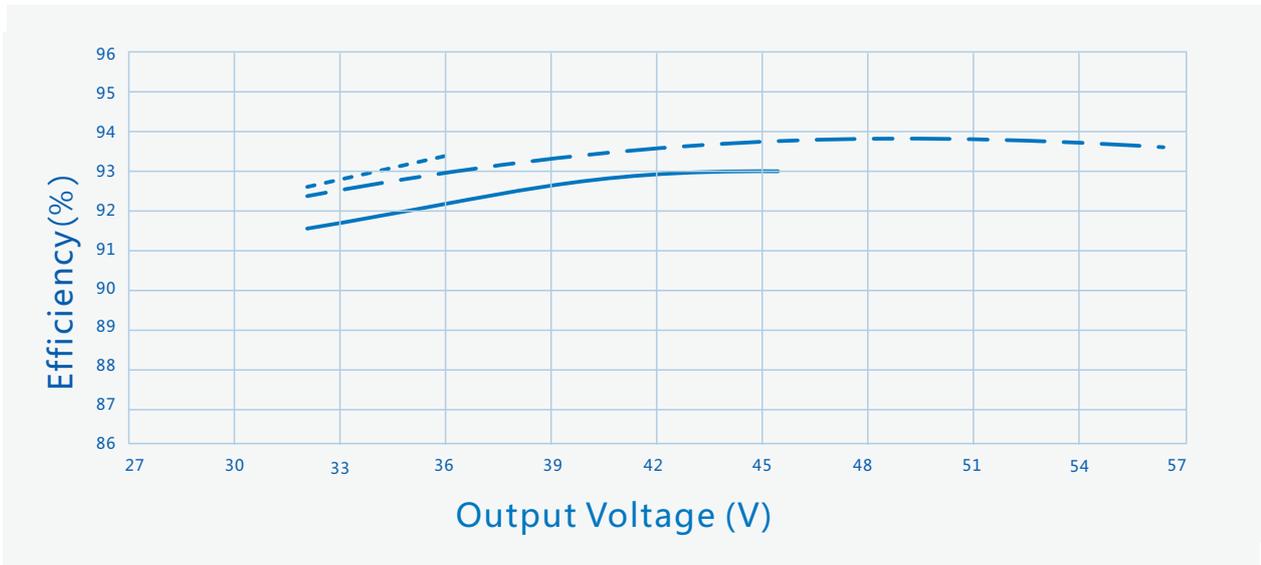

----- Io=6700mA ————— Io=5220mA - - - - Io=4300mA




Vs.

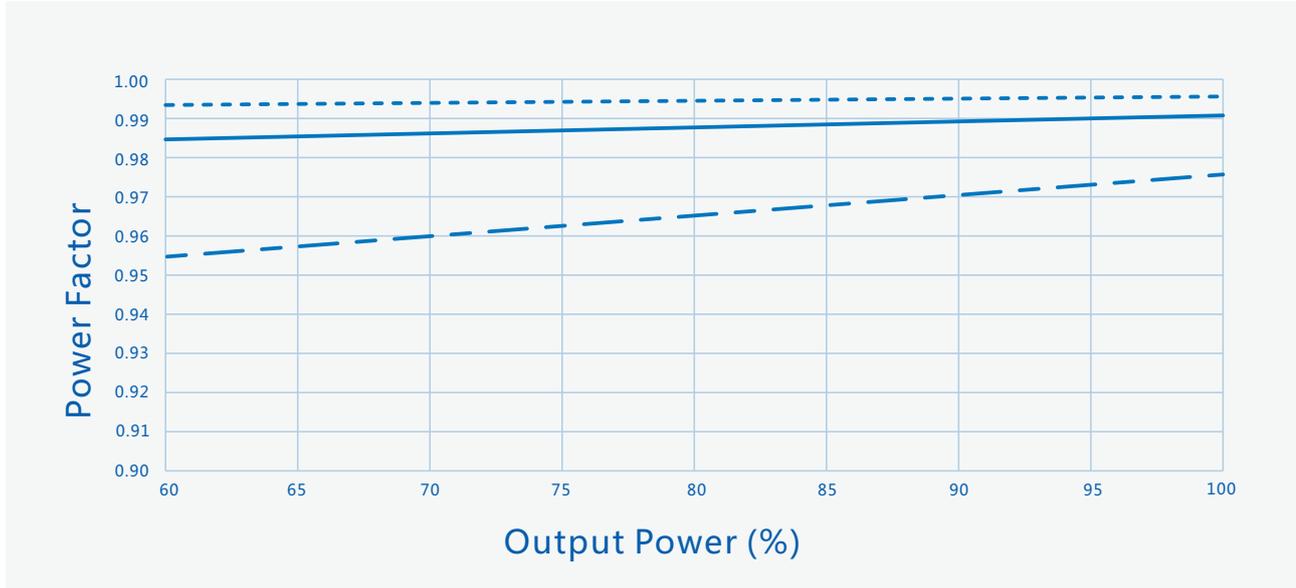

----- Vin= 277Vac ——— Vin= 347Vac - - - Vin= 480Vac

Vs.

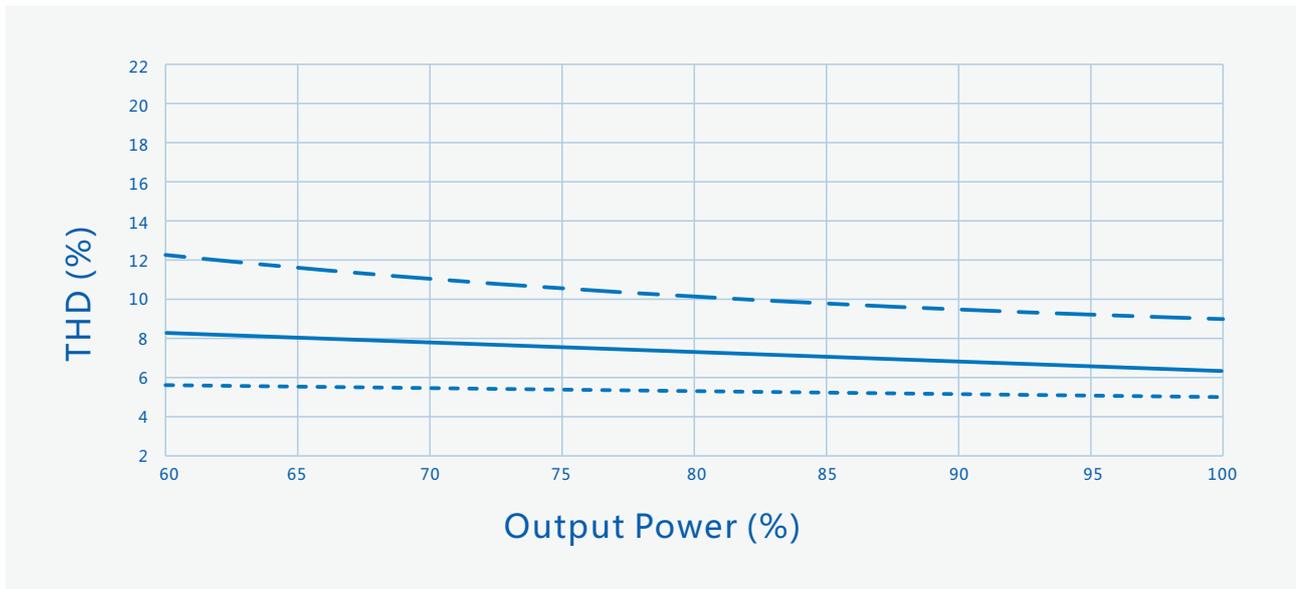

----- Vin= 277Vac ——— Vin= 347Vac - - - Vin= 480Vac





Vs.



SS-240SA

LED





1

- mm) : × × = 580×433×210;
- 8
- 1.8kg 15.5kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU)

2015/863/EU



V00		2019/08/20	