


e

: SS-650L-N360BH
: 650W LED
: V00
: 2022-03-26



型号								
----	--	--	--	--	--	--	--	--

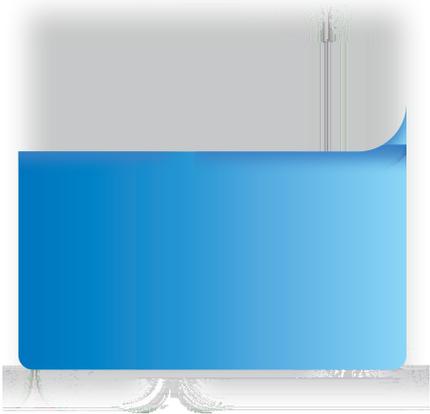

SS-650L-N360BH LED

	200Vac		277Vac	
	180Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			3.83A	200Vac
			766W	200Vac
	(220Vac)		22A	
	(277Vac)		25A	冷机启动
			0.5W	220Vac/50Hz ,
	0.95	0.98		220Vac/50Hz , 满载
	0.90			220-277Vac , 70%-100% 载
		7%	10%	220Vac/50Hz , 满载
			15%	220-277Vac , 70%-100% 载





SS-650L-N360BH LED

	210V		360V	210-240V
	240V		360V	$P_o = V_o * I_o = 650W$
	1.8A		2.7A	2.7A 240V 1.8A 360V
AOC	0.35A		2.7A	
			390V	
@ 220Vac	93.0%	95.0%		360V/1.8A
@ 277Vac	94.0%	96.0%		360V/1.8A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	220Vac
			0.5S	277Vac
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	







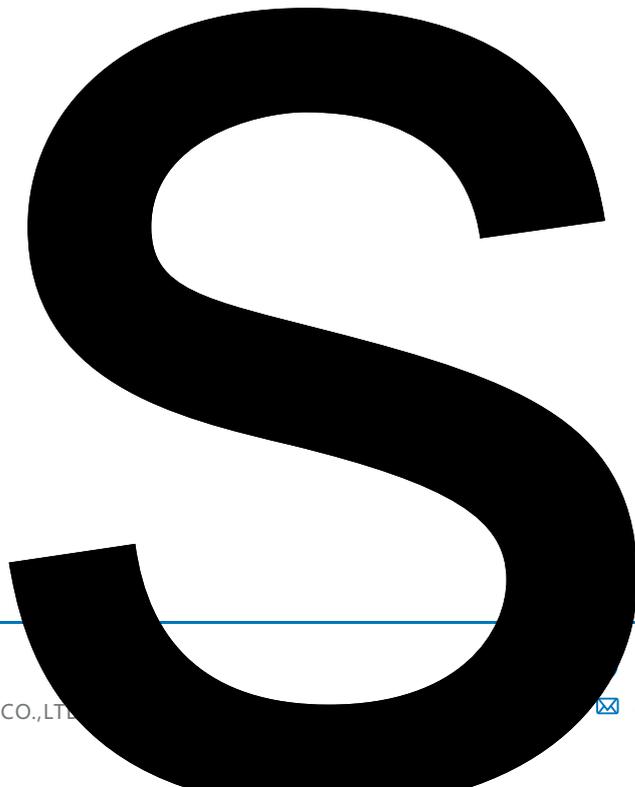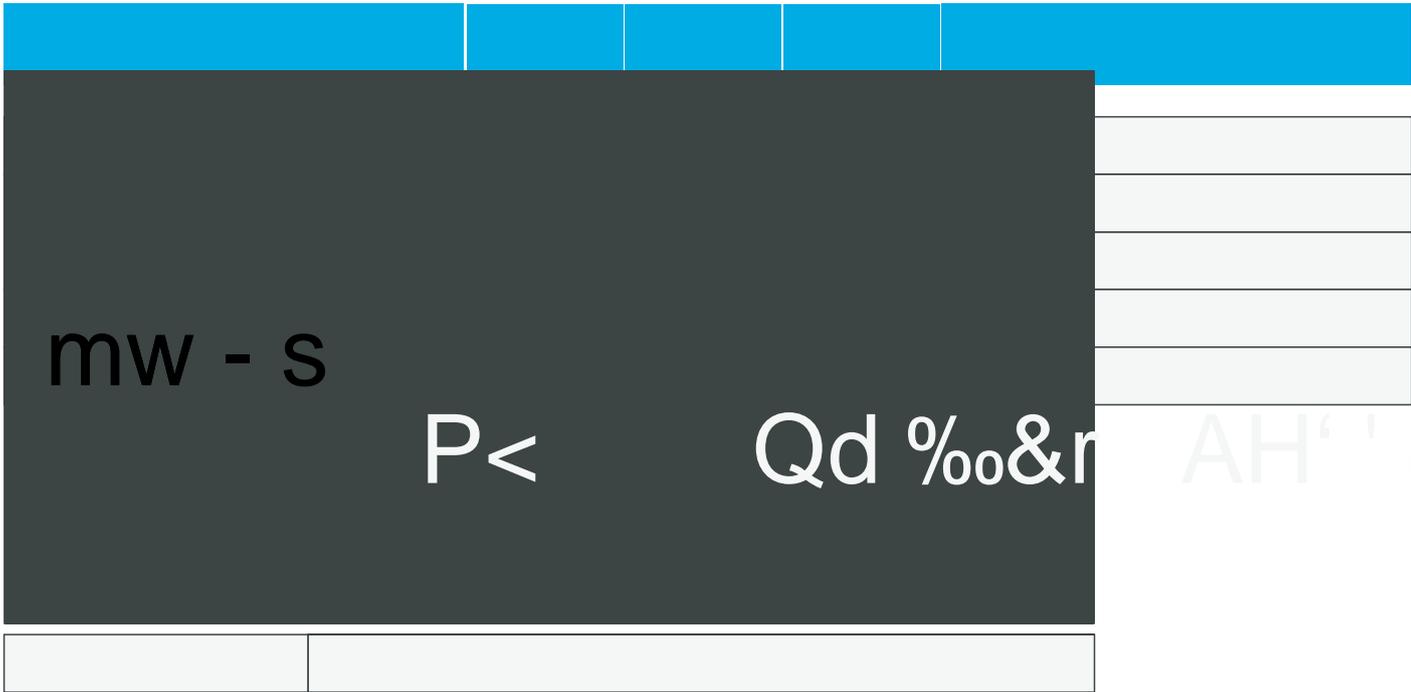


SS-650L-N360BH LED

:




	UL	TUV	CCC	
	1600Vac	1500Vac	/	
	1600Vac	3000Vac	/	
	1600Vac	3000Vac	/	
	500Vac	500Vac	/	
	10MΩ			500Vdc
	0.1Ω			25A/1min
	0.75mA			277Vac

- | | | |
|-------|------------------|------|
| 1. | EMC | EMC |
| 2. | LN | |
| 3.CCC | IEC 60598-1:2014 | 10.2 |

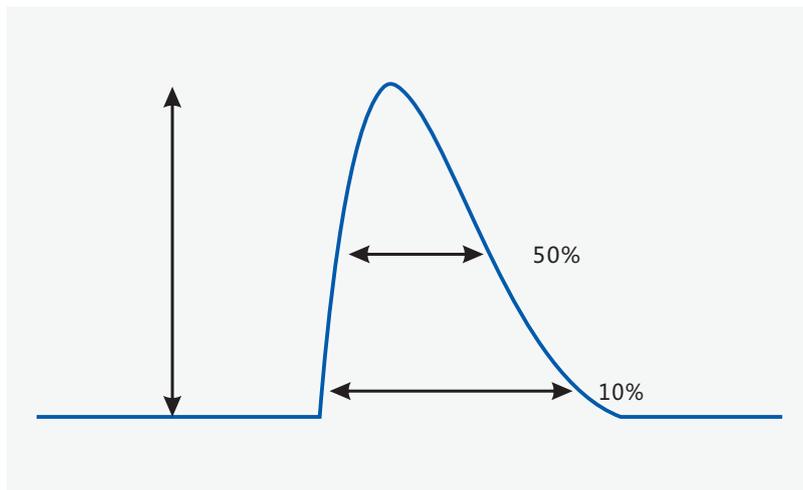


Vin		(@ 10%)	(@ 50%)
220Vac	22A		1.4mS
277Vac	25A	5.5mS	


SS-650L-N360BH LED

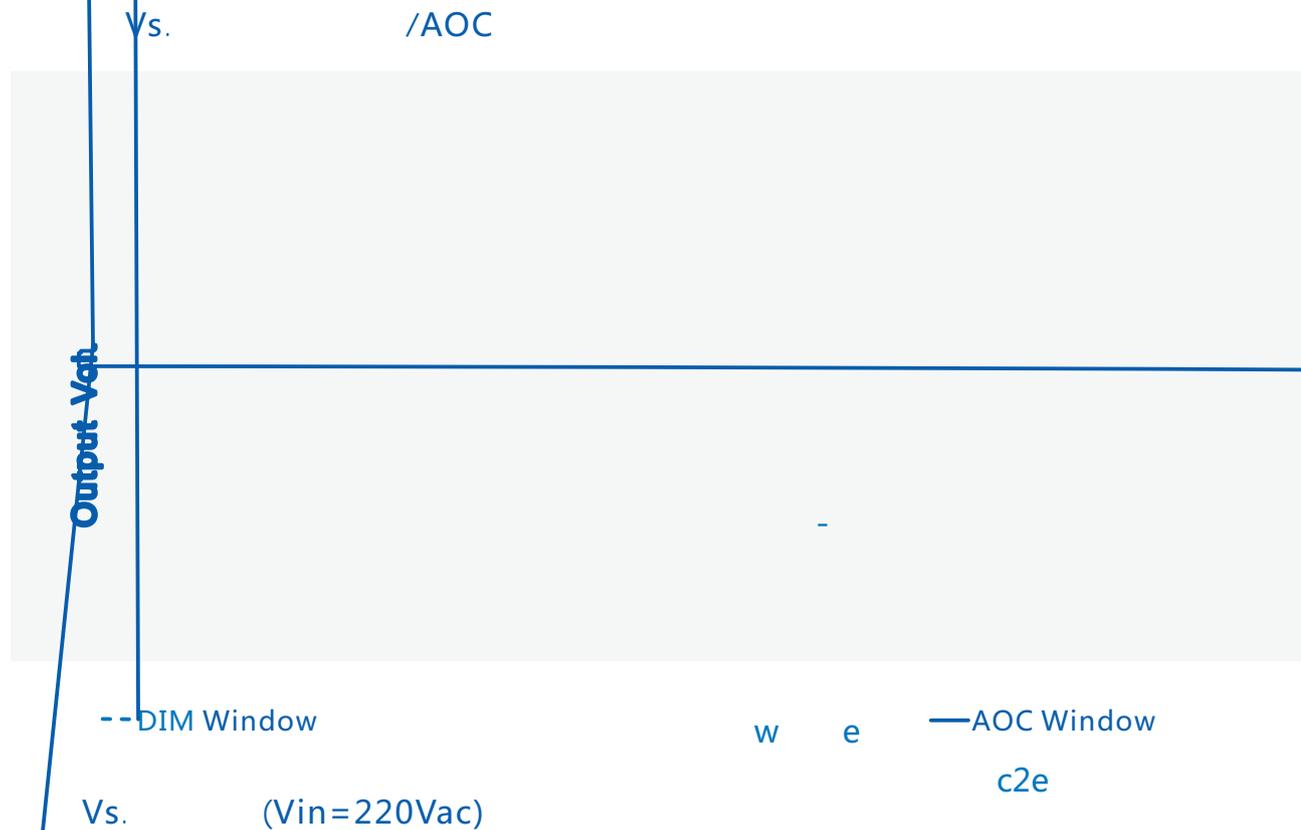


Vs. (Vin=277Vac)

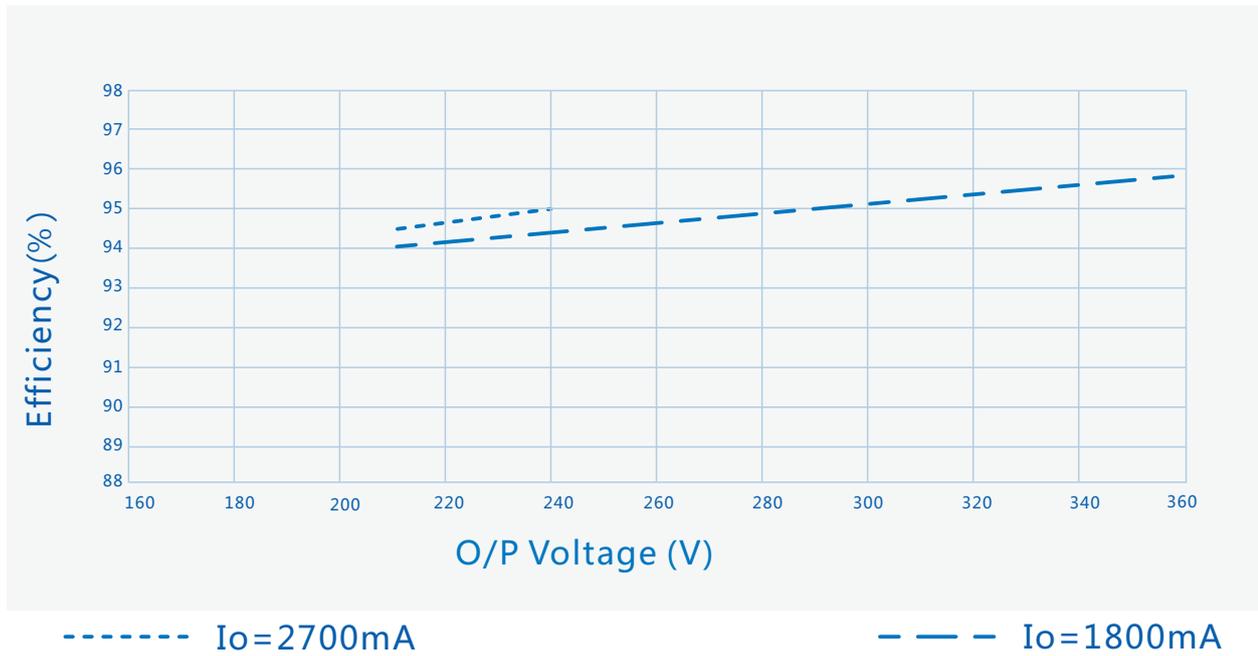

Vs.

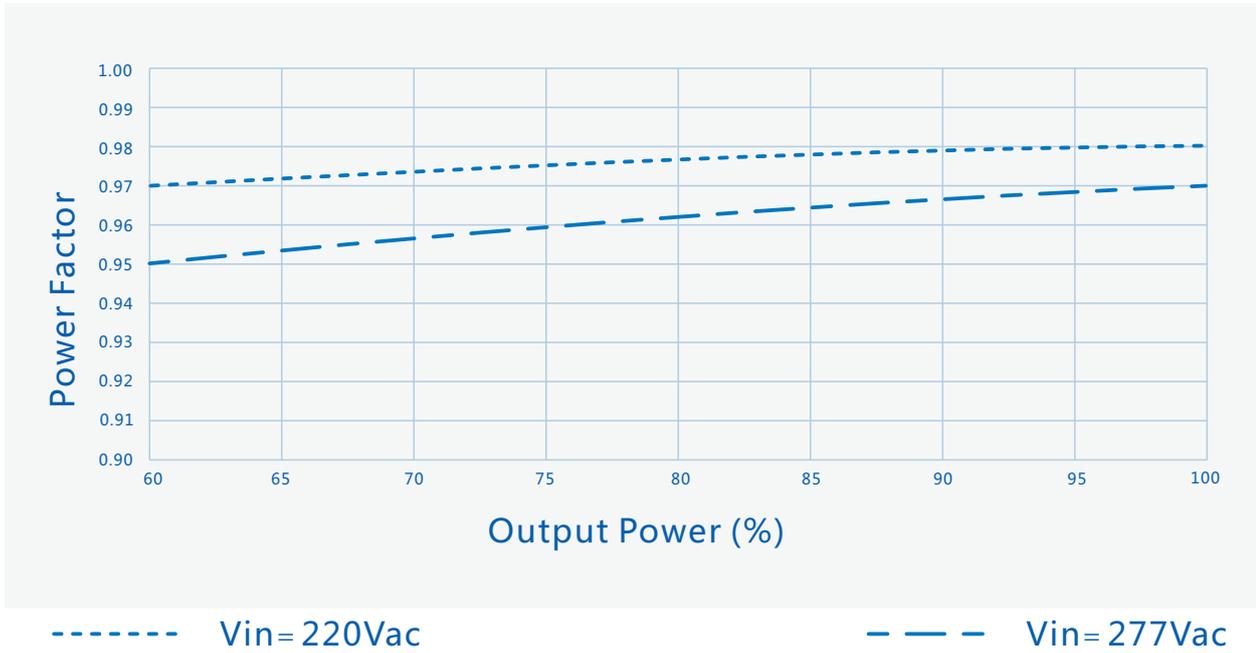


Vs.

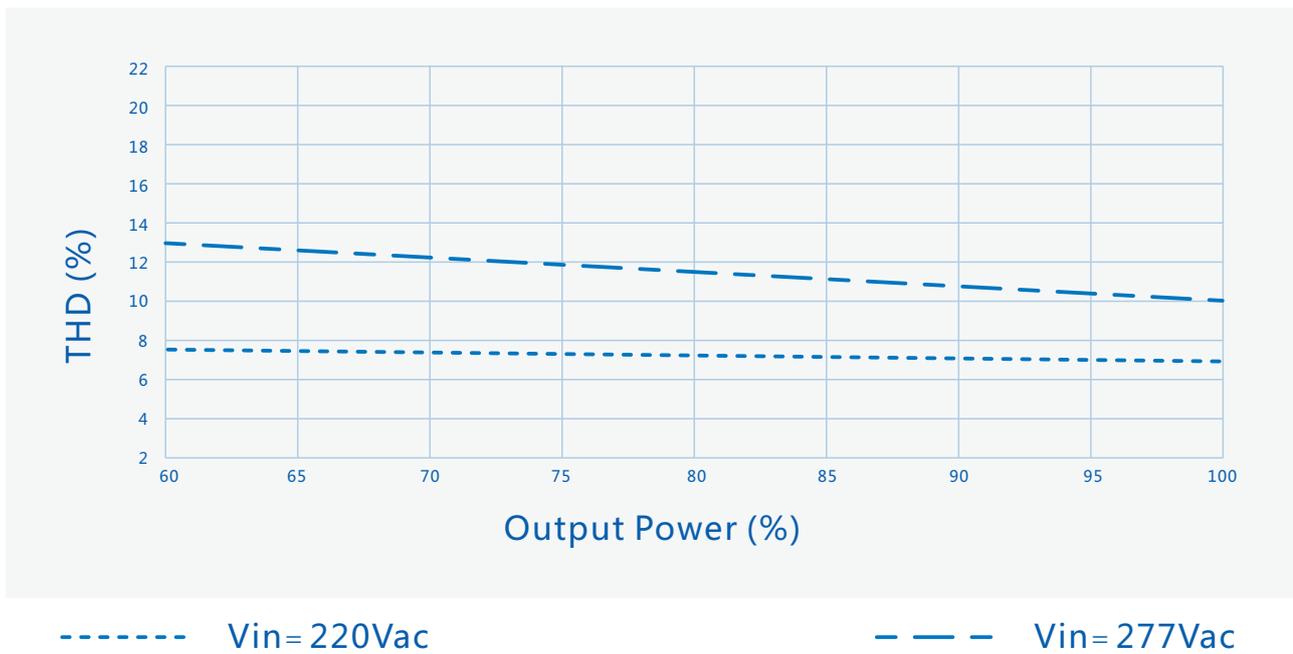

SS-650L-N360BH LED

Vs. (50)

Vs.

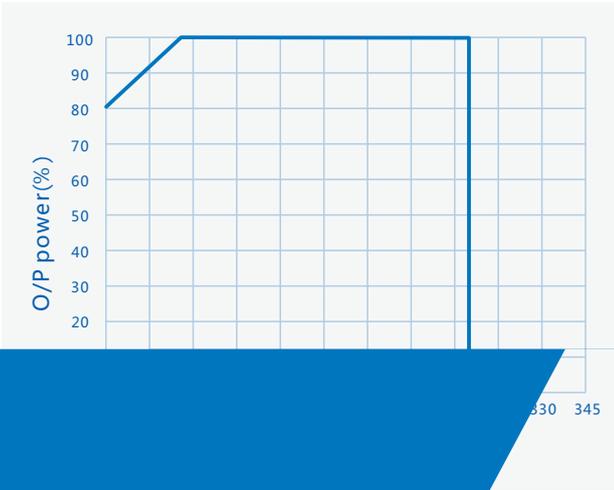



Vs.



SS-650L-N360BH LED

1
2
3 PC

v
S . n
n L @

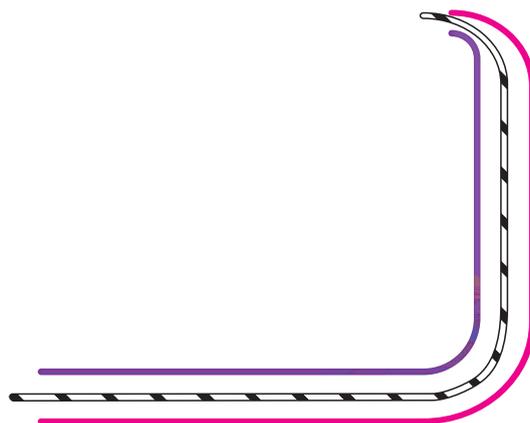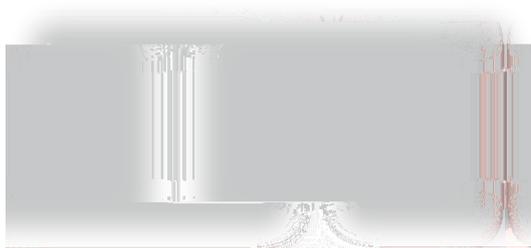

LED

LED





S

CO., LTD

SS-650L-N360BH LED



- 1
- 2 LED 3KV
- 3、 5mm
- 4、 LED+ LED- 1.8mm
- 5、
- 6 LED

- mm) : × × = 493×385×116;
- 7
- 1.745kg 13.2kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU



SS-650L-N360BH LED



V00		2022/03/26	

