

: SS-200EUH-XX
: 200




SS-200EUH

崧盛电源
LED DRIVER



Constant Voltage Power

EUH 系列

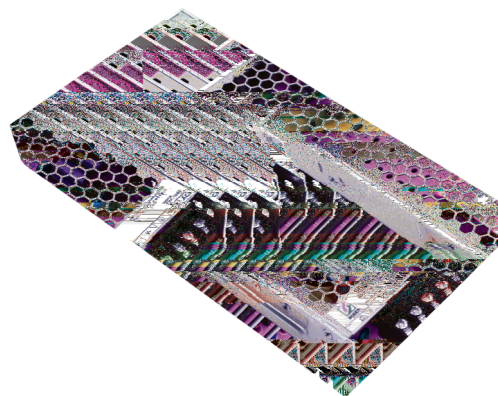

产品特性：

- 89%
- 115VAC 230VAC
-
- 全方位保护：短路/过温/ /过
-
-
- 质保3年

产品描述：

SS-200EUH 200W 115Vac 230Vac 30mm

型号列表：

型号		最大输出功率			()	
SS-200EUH-12	100-120Vac 200-240Vac	200W	12V	0-17A	85%	75
SS-200EUH-24	100-120Vac 200-240Vac	200W	24V	0-8.8A	88%	75
SS-200EUH-36	100-120Vac 200-240Vac	200W	36V	0-5.9A	89%	75
SS-200EUH-48	100-120Vac 200-240Vac	200W	48V	0-4.4A	89%	75

SS-200EUH-XX
220Vac , 25°C

115VAC 230VAC) ,



输入性能：

参数	最小值	典型值	最大值	
	100Vac		120Vac	
	100Vac		264Vac	
	47Hz		60Hz	
			4.5A	5100Vac
(115Vac)			100A	冷机启动
			15A	220Vac/50Hz

1

SS-200EUH

输出性能(SS-200EUH-12) :

参数	最小值	典型值	最大值	备注
		12V		
空	11V		13V	
			17A	
			200W	
	83.0%	85.0%		@ 220Vac
	82.0%	84.0%		@ 110Vac
	-1%		+1%	
PK-PK			1%	20MHz
	-1%		+1%	
	-1%		+1%	
			10%	
	-10%		+10%	10% - 50% 100% - 50%
		1S	2S	
		50mS		@ 220Vac
		16mS		@ 220Vac

SS-200EUH

输出性能(SS-200EUH-24) :

参数	最小值	典型值	最大值	备注
		24V		
空	22V		26V	
			8.8A	
			200W	
	86.0%	88.0%		@ 220Vac
	84.0%	86.0%		@ 110Vac
	-1%		+1%	
PK-PK			1%	20MHz
	-1%		+1%	
	-1%		+1%	
			10%	
	-10%		+10%	10% - 50% 100% - 50%
		1S	2S	
		50mS		@ 220Vac
		16mS		@ 220Vac

SS-200EUH

输出性能(SS-200EUH-36) :

参数	最小值	典型值	最大值	备注
		36V		
空	34V		38V	
			5.9A	
			200W	
	86.0%	88.0%		@ 220Vac
	84.0%	86.0%		@ 110Vac
	-1%		+1%	
PK-PK			1%	20MHz
	-1%		+1%	
	-1%		+1%	
			10%	
	-10%		+10%	10% - 50% 100% - 50%
		1S	2S	
		50mS		@ 220Vac
		16mS		@ 220Vac

S
—
输

		@ 100% ac 0
	+ 6%	
	1 91 % % 4	

其他性能：



SS-200EUH

环境要求：

参数	最小值	典型值	最大值	备注
Ta	-20	25	+50	
	-25	25	+85	
	20%RH		90%RH	
	10%RH		95%RH	
			2000m	>2Km 5 /1Km

安规标准：

认证	安规标准	认证状况	备注
UL/cUL	UL60950-1		
CCC	GB 4943.1-2011		



G -

mmam

RENZ

RELEASE


LTD

86-755-8800

SS-200EUH


特性曲线：

Vs. (50)

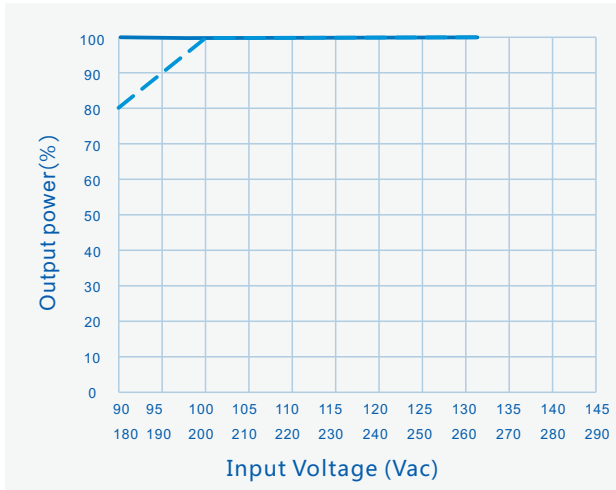

—— 180-264VAC - - - - - 90-132VAC

Vs.

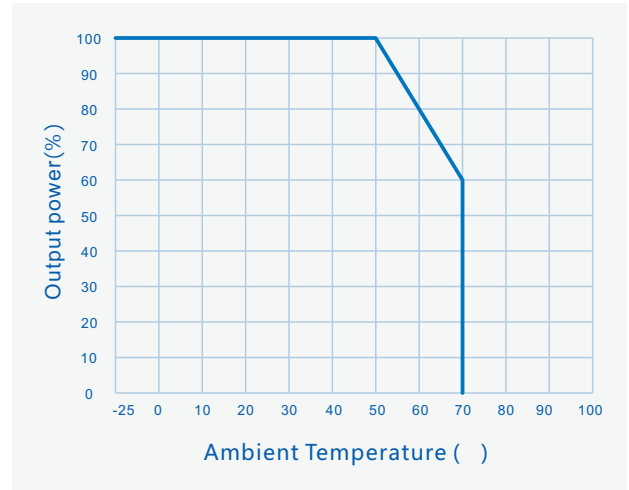

SS-200EUH

结构尺寸特性 (单位 : mm)





包 装

- mm) : × × = 495×385×162;
- 12
- 0.69kg 9.8kg
-
-
-

变更履历表

V00		2022/02/16	
V01		2022/04/14	

