




	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			0.6A	100Vac

(120Vac)			10	
(220Vac)			15	启动
(277Vac)			20	启动

	0.95	0.97		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 80-100%
		8%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 80-100%





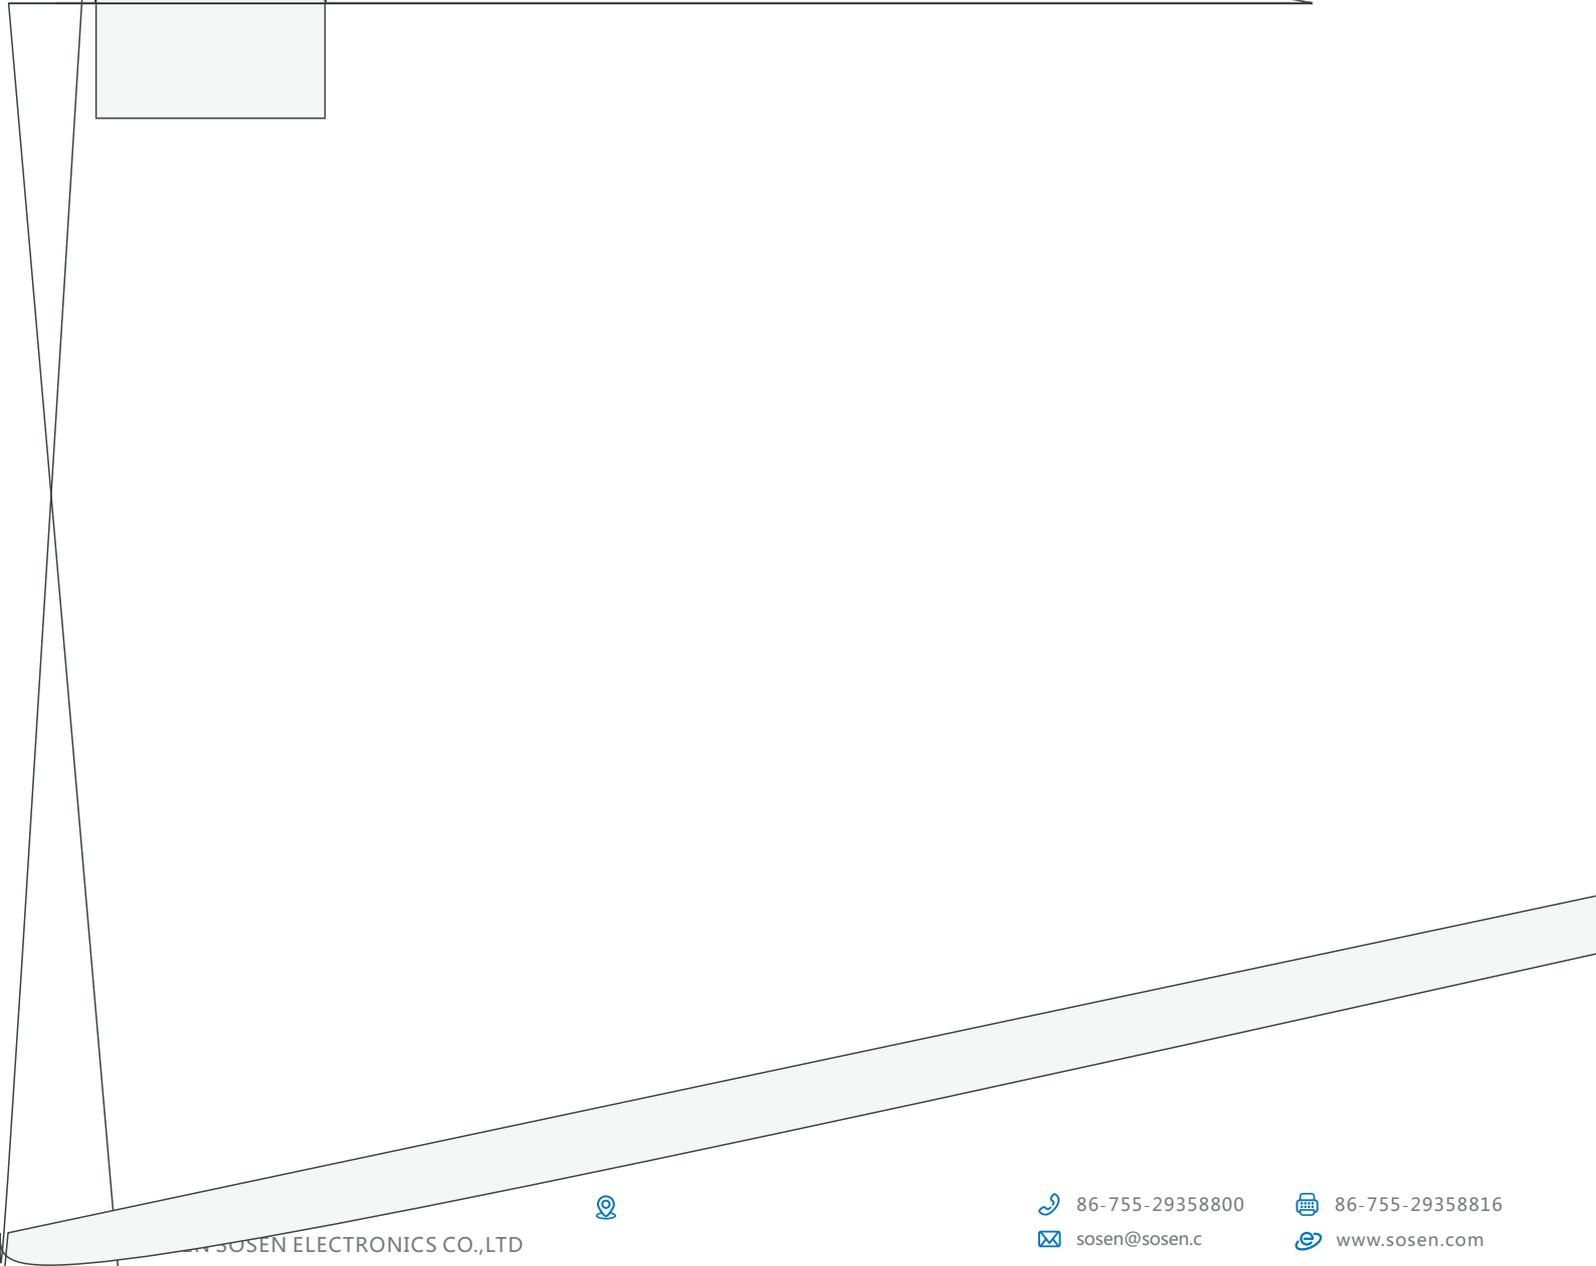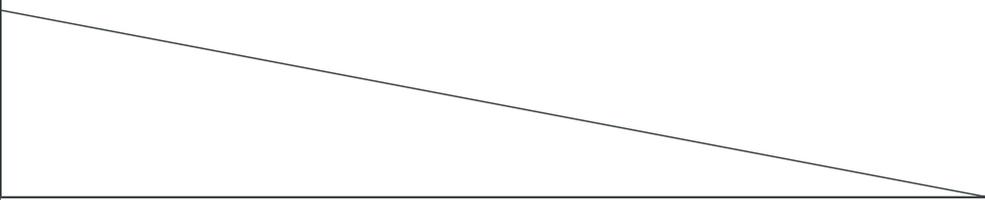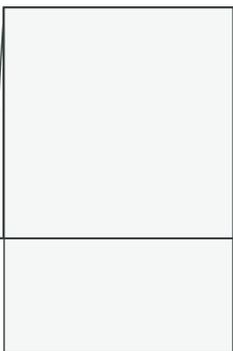

SOSEN ELECTRONICS CO.,LTD

 86-755-29358800

 sosen@sosen.c

 86-755-29358816

 www.sosen.com


se	25
	25
H	
	um

UL8750
755 20258888






Vs. ()



----- Dimming Window

Vs. (Vin=120Vac)






SS



LED

Vs.

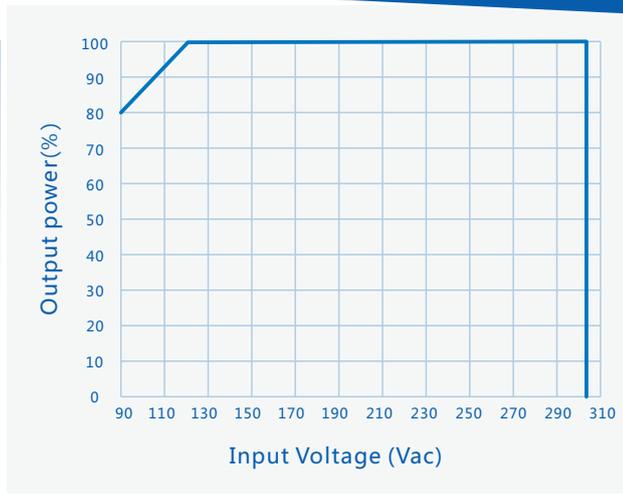

Vs.







- 1 LED 3KV
- 2、 5mm
- 3、 LED+ LED- 1.8mm
- 4、
- 5 LED

- mm) : × × = 495×385×162;
- 42
- 0.18kg 9.06kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU





V00		2022/07/29	
V01		2022/09/07	

