

SOSEN LED Driver, Your Smart Choice

SS-150CA LED

: SS-150CA-XX*

: 150W LED

: V10

: 2023-02-01

S5

220Vac , 25°C;
LED

LED

动



2 %

2

1 c t ê	2	v " "		W
AOC				





Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/		
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B	
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B	
	IEC/EN 61000-3-2	Class C	
	IEC/EN61000-4-5;ANSI/C82.77-5-2017	B (6kV, 6kV)	
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV, 6kV)	






Vs. (/AOC)

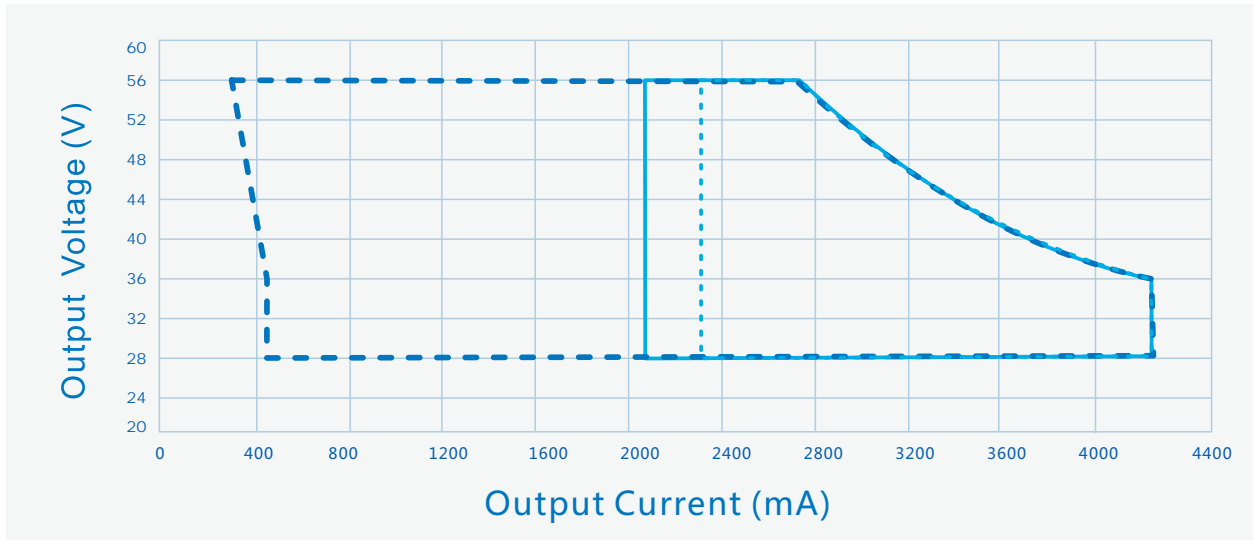


----- Dimming Window ——— AOC Window AOC Window For DALI-2

Vs. (Vin=120Vac)

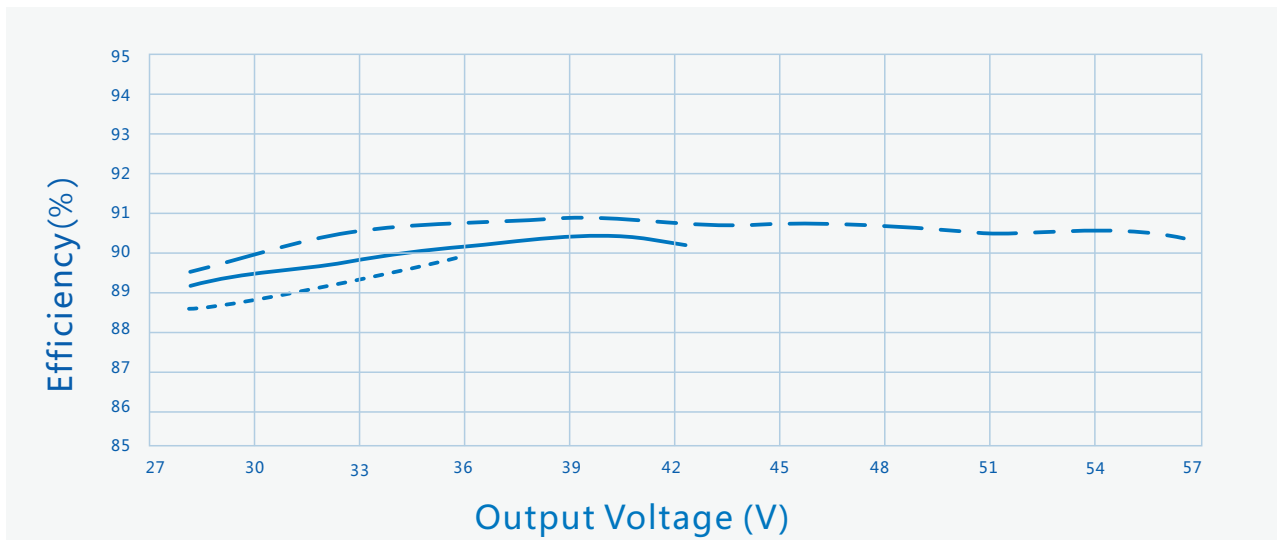


----- Io=4200mA ——— Io=3500mA - - - Io=2700mA

Vs. (Vin=220Vac)

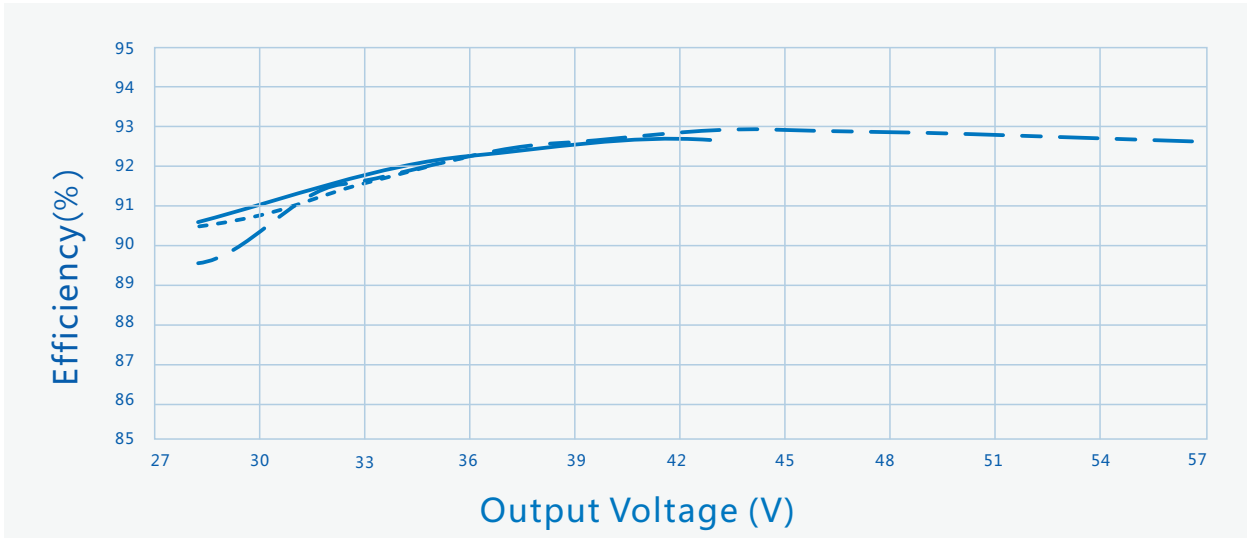

----- Io=4200mA ——— Io=3500mA - - - Io=2700mA

Vs. (Vin=277Vac)

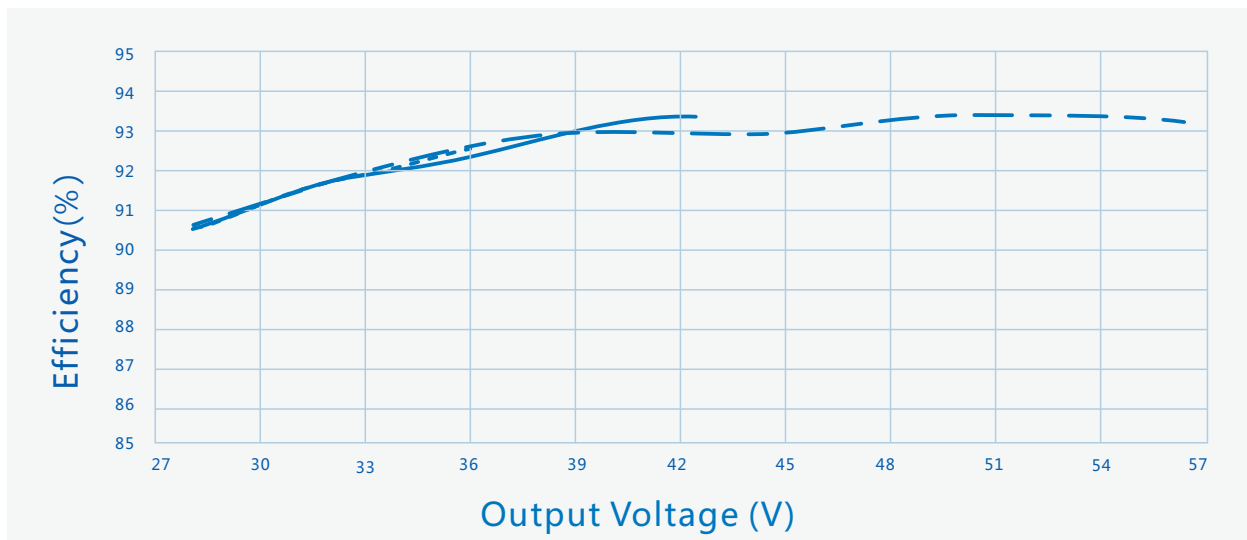

----- Io=4200mA ——— Io=3500mA - - - Io=2700mA



SS-150CA


LED

Vs.


Vs.

SS-150CA LED

Vs. (60)

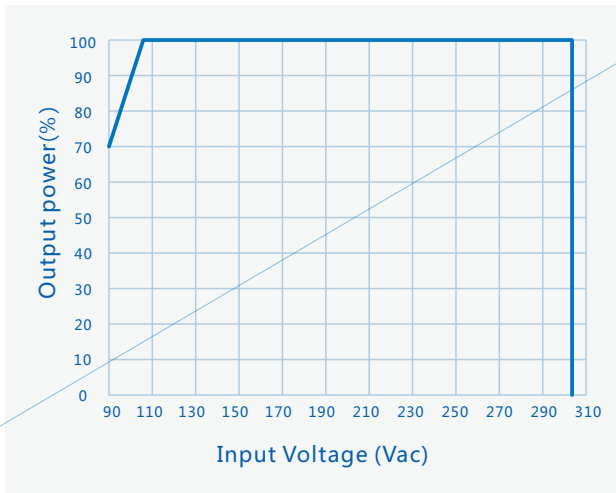


Vs.

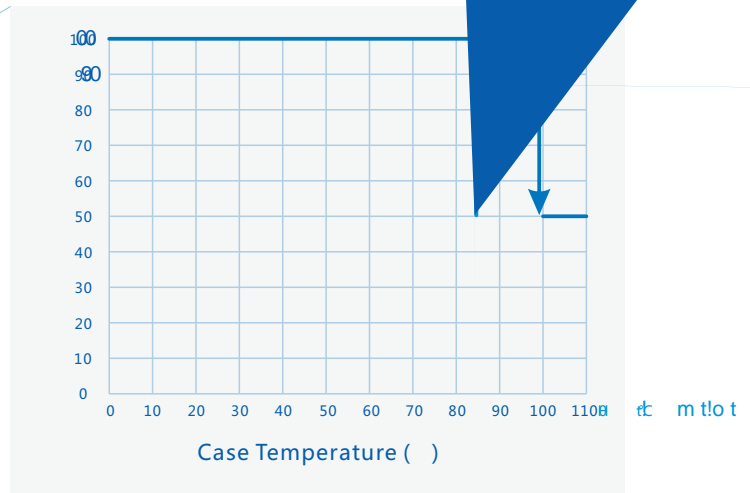

Vs.

Vs.

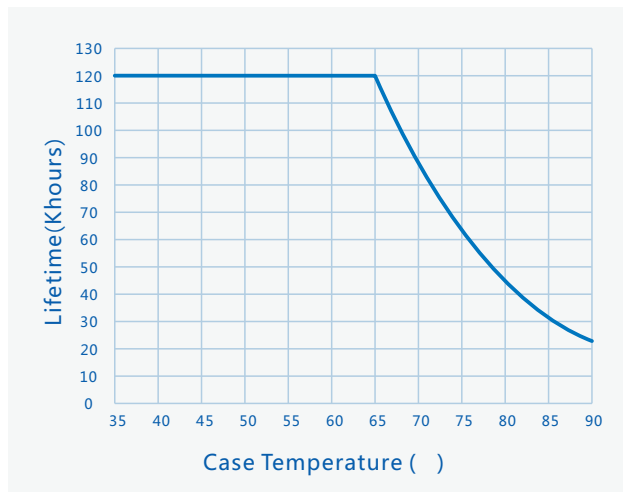



1

704

2

- mm) : × × = 495×385×162;
- 9
- 1.5kg 15kg
-
-

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU)

2015/863/EU



SS-150CA LED



V00		2019/09/17	
V01	CCC	2019/10/29	
V02		2020/04/07	
V03	i t N V è	2020/04/27	t
V04			

