





- 88%
- 0-10V, PWM, 阻
- 全方位保护：短路/过温/过压
- Class 2 合
- Type HL, 可用于危险场合 合
- : 6kV/ 4kV
- 质保5年



型号



	120Vac		277Vac	
	108Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			1.0A	120Vac
			95W	120Vac
(120Vac)			80A	
(220Vac)			130A	冷机启动
(277Vac)			160A	冷机启动
			1W	220Vac/50Hz ,
	0.95	0.97		220Vac/50Hz , 满载
	0.90			120-277Vac/50Hz , 70-100%载
		8%	12%	220Vac/50Hz , 满载
			20%	120-277Vac/50Hz , 70-100%载



---

## (SS-80L-E54B)

--	--	--	--	--




	0V	12V
	10%Iomax	100%Ioset
	0V	10V 1 L
	9.8V	10.2V
	0V	
	1KHz	
	0%%I	
	0KOhm	
	10%I...	


75	50,000 hours	80%
MTBF	236,000 hours	220Vac, 25 (MIL-HDBK-217F)
	90	
	5	75








Vs. (Vin=120Vac)

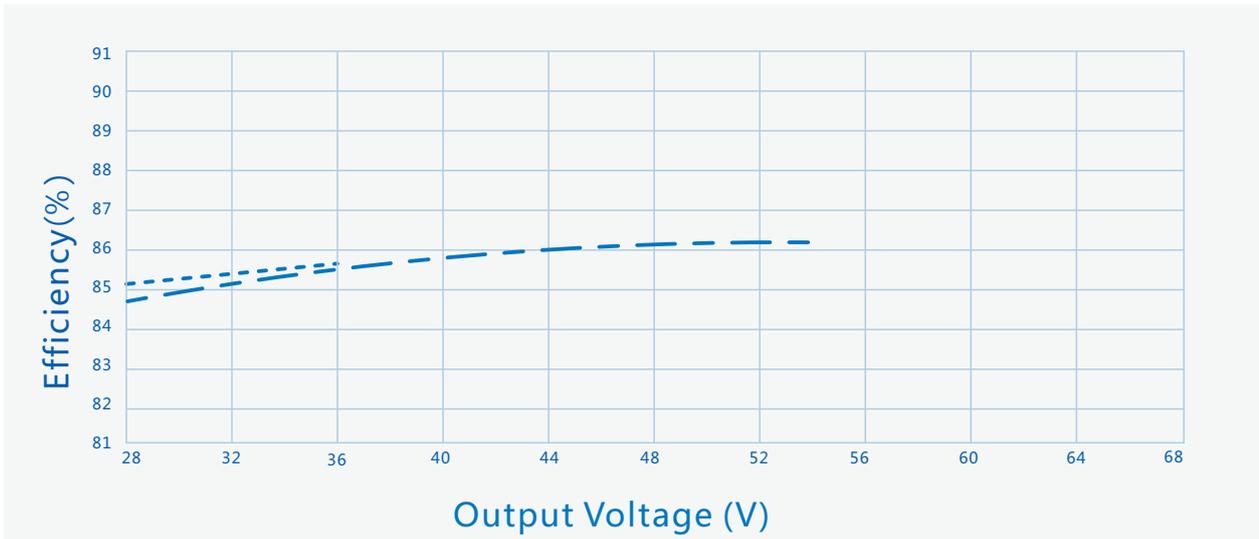

----- 36V/2.2A

- . - . 54V/1.48A

Vs. (Vin=220Vac)

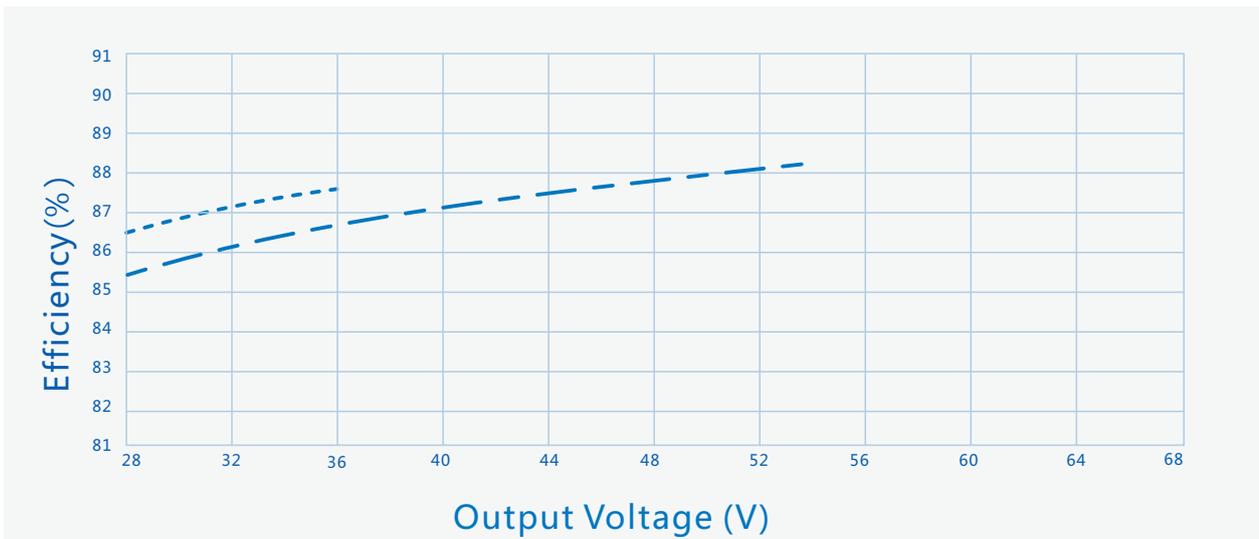


----- 36V/2.2A

- . - . 54V/1.48A



Vs. (Vin=277Vac)

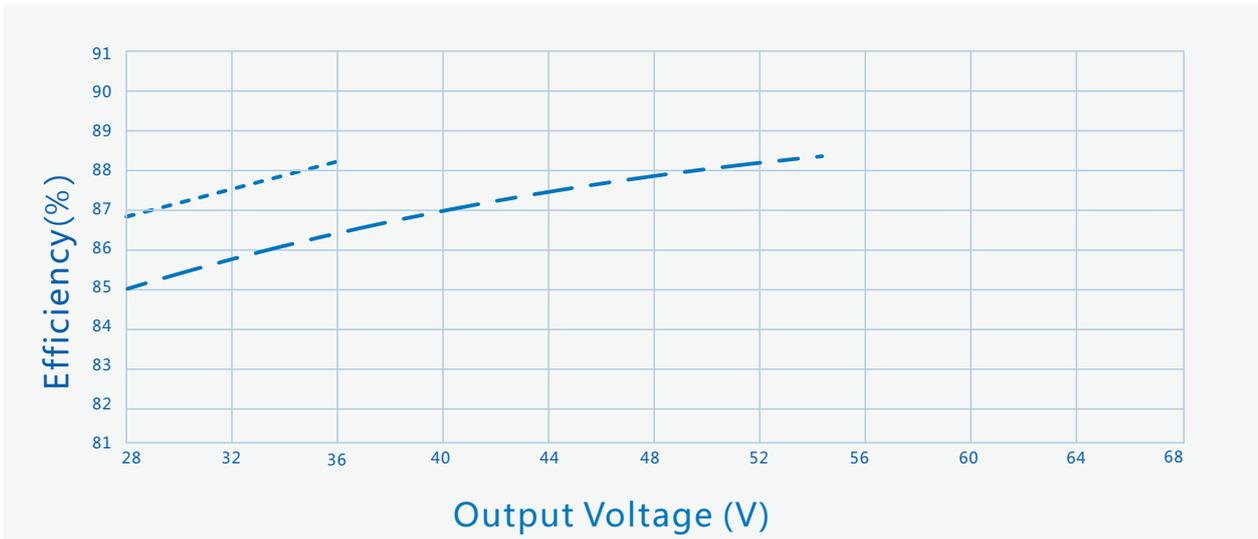

----- 36V/2.2A

- . - . - 54V/1.48A




Vs.

m


C




Vs.

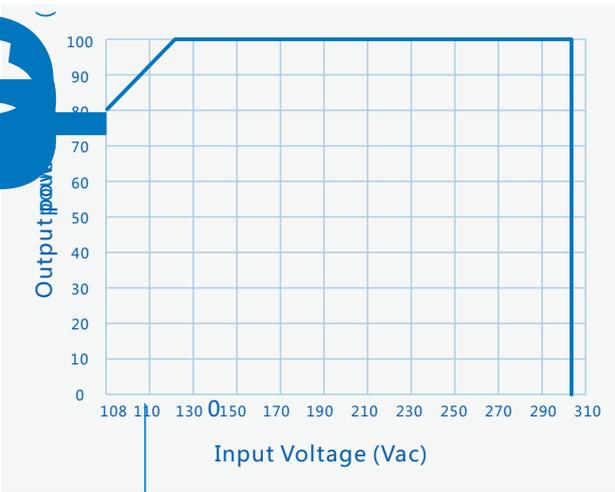


Vs.

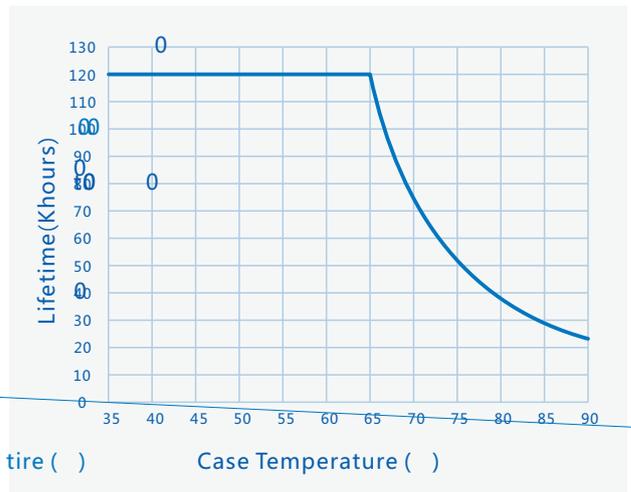

Vs.

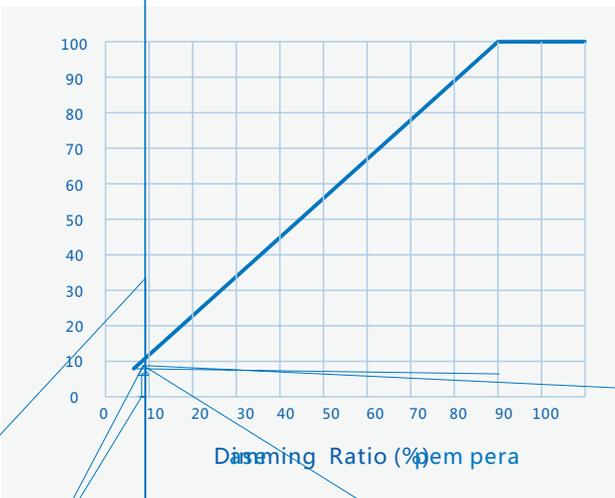


# SS-80L-E LED

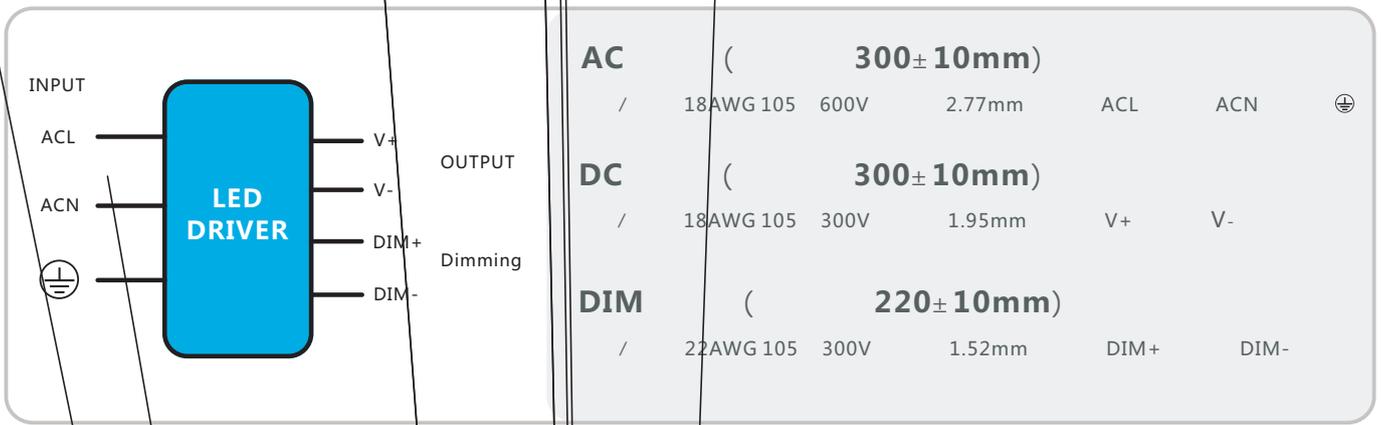

<b>AC</b>	(	<b>300±10mm</b>				
/	18AWG 105	600V	2.77mm	ACL	ACN	⊕
<b>DC</b>	(	<b>300±10mm</b>				
/	18AWG 105	300V	1.95mm	V+	V-	
<b>DIM</b>	(	<b>220±10mm</b>				
/	22AWG 105	300V	1.52mm	DIM+	DIM-	

		mm(In.)
	L3	163(6.42)
	W1	45.5(1.79)
	H	31.5(1.24)
	L1	179.5(7.07)
	L2	171(6.73)
	W2	28(1.1)
Tc	X	125(4.92)
Tc	Y	21(0.83)

1 AC LED  
2 DC DIM :  
10±2mm;

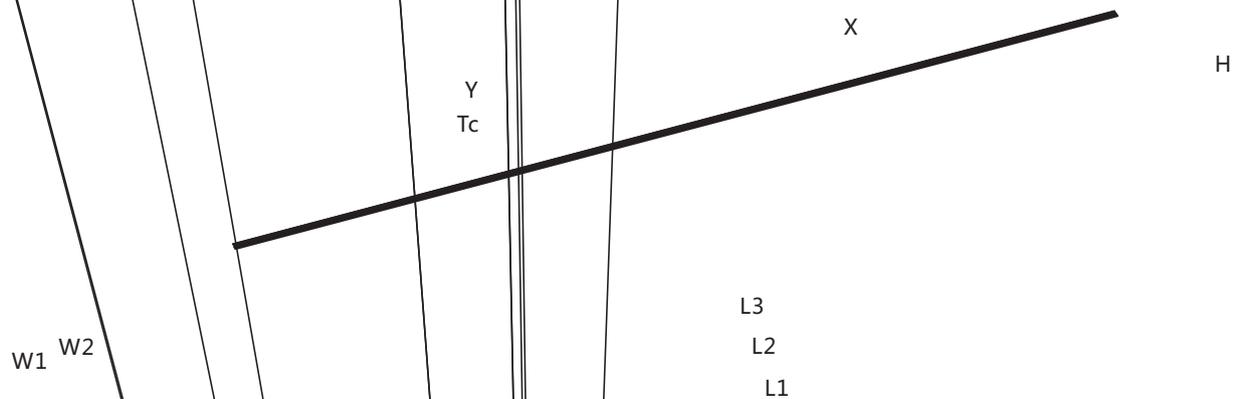



sq 8 2 #dc s )dQ0 P e dc