



Sosen LED Driver, Your Smart Choice


SS-150SA LED

: SS-150SA-XX

: 150W LED

: V09

: 2023-02-01

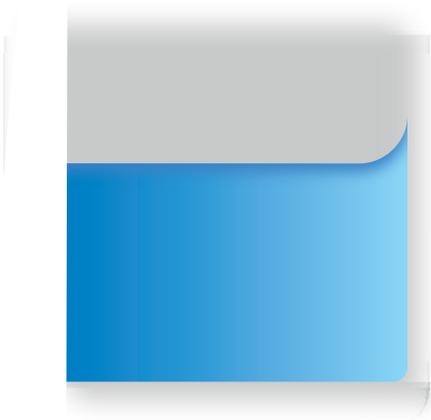

SS-150SA LED

" * "



	277Vac		480Vac	
	249Vac		528Vac	
	47Hz	50/60Hz	63Hz	
			0.8A	277Vac
			170W	277Vac
	(277Vac)		50A	
	(347Vac)		70A	
输 .	(480Vac) 适s		90A	
			1.5W	347Vac/60Hz ,
	0.93	0.95		347Vac/60Hz , 满载
	0.90			277-480Vac , 80%-100% 载
		7%	10%	347Vac/60Hz , 满载
			20%	277-480Vac , 80%-100% 载



SS-150SA LED

	22V		56V	22-36V
	36V		56V	$P_o = V_o \cdot I_o = 151.2W$
	2.7A		4.2A	4.2A 36V 2.7A 56V
AOC	2.1A		4.2A	
			60V	
@ 277Vac	90.5%	91.0%		56V/2.7A
@ 347Vac	91.0%	91.5%		56V/2.7A
@ 480Vac	91.0%	91.5%		56V/2.7A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
		0.5S	1.0S	277Vac
		0.5S	1.0S	347Vac
	-1%		+1%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,







:

1.


EMC

EMC

2.

LN


I

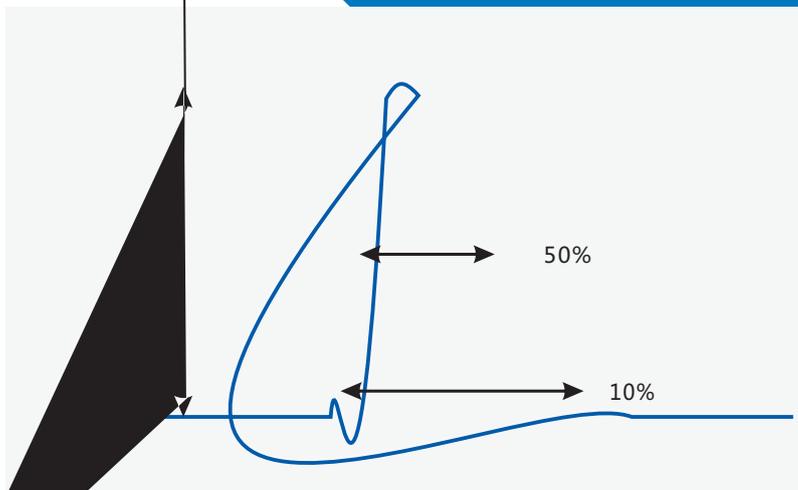

		(@ 10%)	(@ 50%)
277Vac	50A	542uS	
480Vac	90A	582uS	

SS-150SA LED


Vs. /AOC



Vs. (Vin=277Vac)




Vs. (Vin=347Vac)

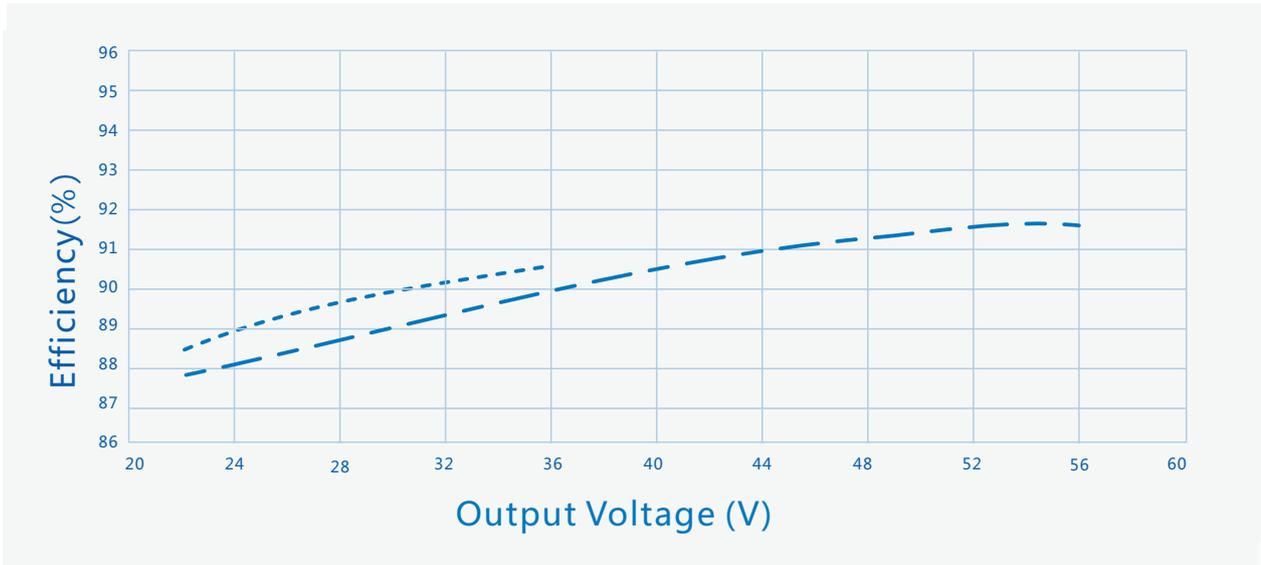

----- Io=4200mA

- . - . Io=2700mA


Vs. (Vin=480Vac)

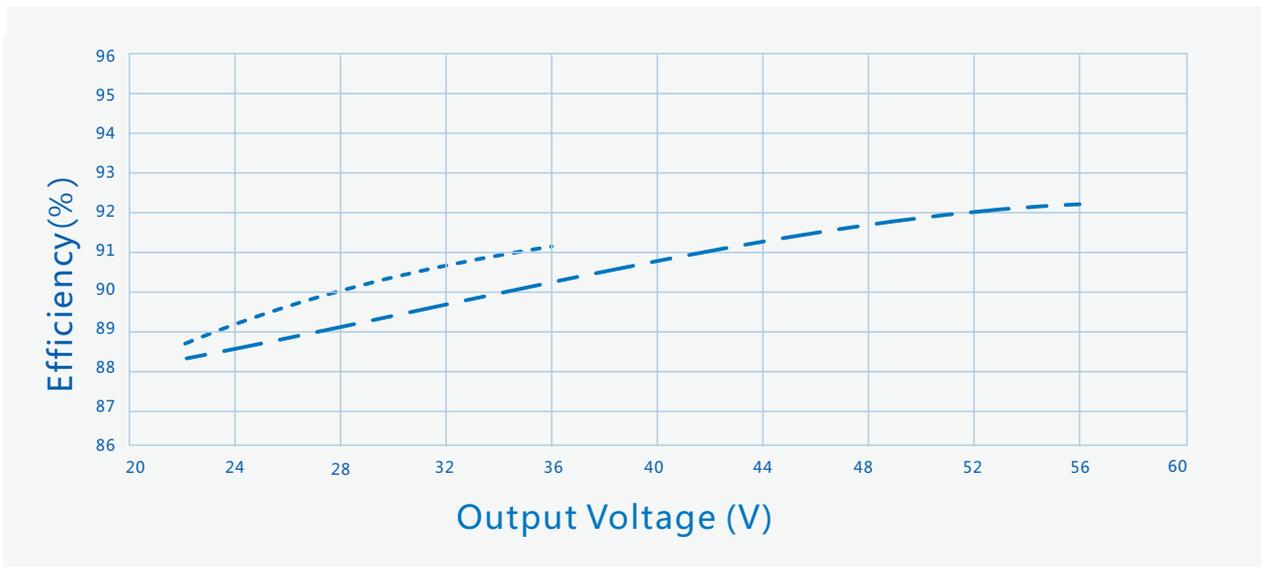


----- Io=4200mA

- . - . Io=2700mA






Vs.





Vs.



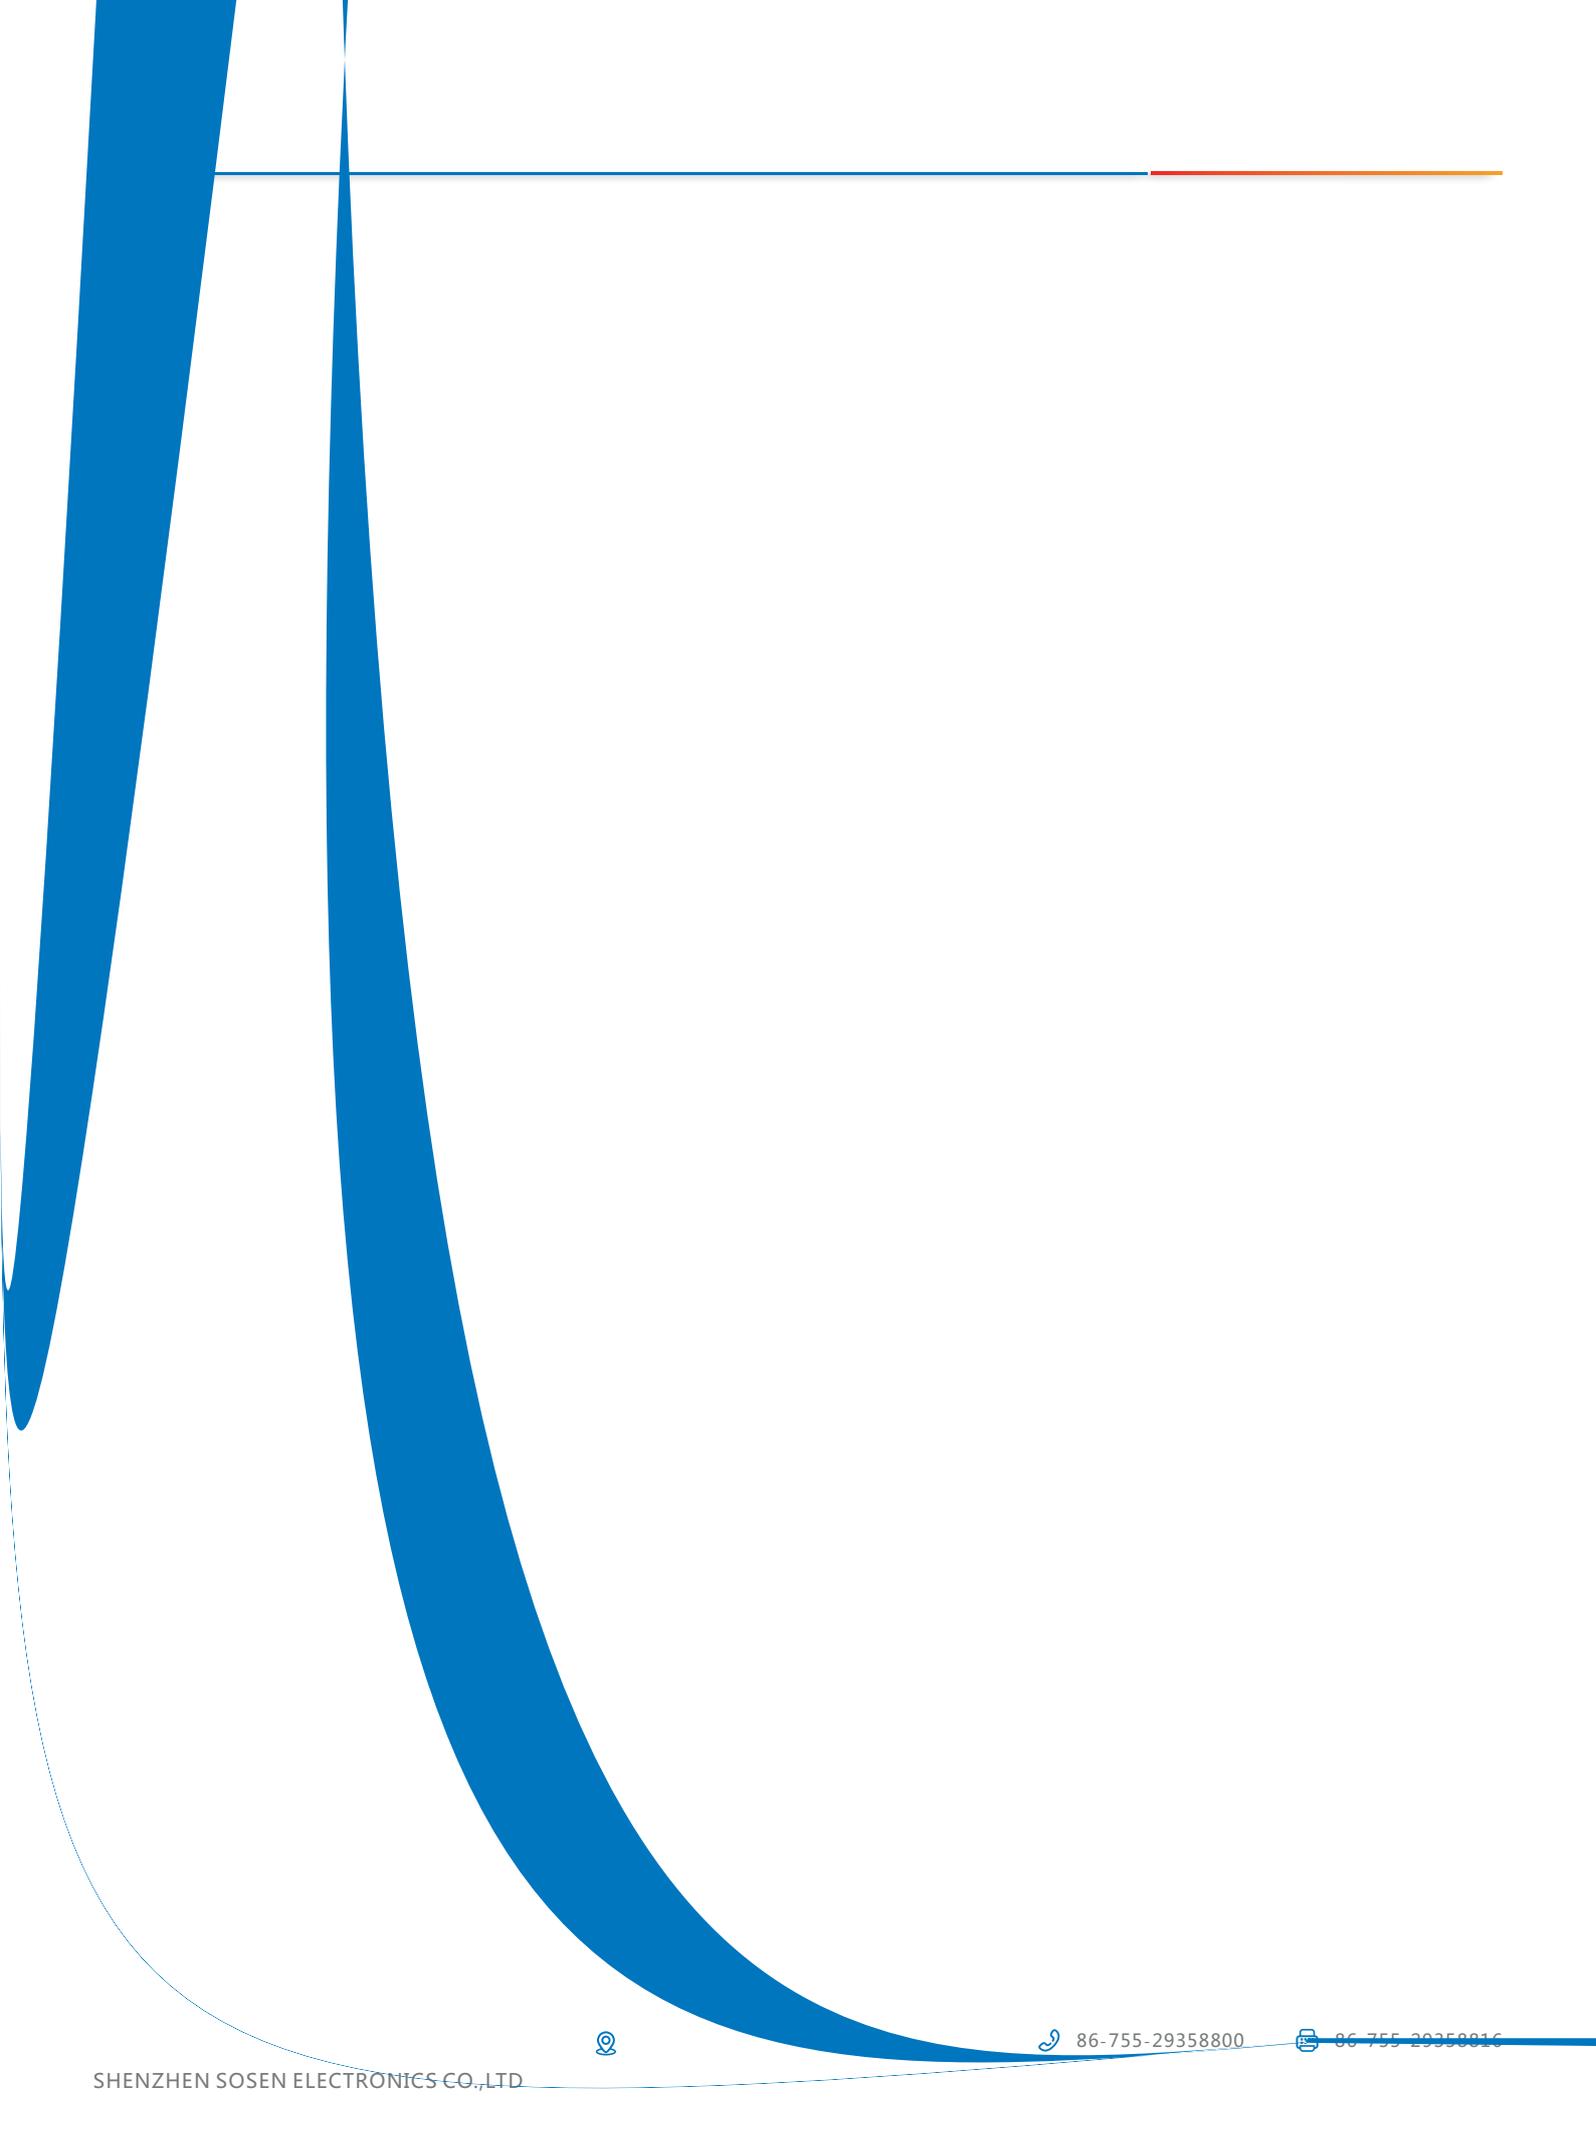



1

- mm) : × × = 495×385×162;
- 9
- 1.1kg 11.4kg
-
-
-

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU) 2015/863/EU



SS-150SA

LED

