

SOSEN LED Driver, Your Smart Choice

SS-72AH LED

: SS-72AH-XX

: 72W LED

: V02

: 2021-07-02



-
- 防
- 全方
-
-
- 质保

型号



| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

| | | | | |
|--|--|--|--|--|
| | | | | |
|--|--|--|--|--|

| |
|--|
| |
|--|

| |
|--|
| |
|--|

| |
|--|
| |
| |

| |
|------------------|
| |
| 冷机启动 |
| 冷机启动 |
| 220Vac/50Hz , 空载 |
| 220Vac/50Hz , 满载 |
| 100-27 |
| |
| |

SS-72AH LED

| | | 22.8V | 24V | 25.2V | |
|----|----------|---------|-------|---------|------------------------|
| CV | | 0A | | 3.0A | |
| | | 15V | | 18V | |
| CC | | 1.5A | | 3.6A | |
| | AOC) | 1.3A | | 4.0A | |
| | | | | 25.2V | |
| | @ 120Vac | 83.0% | 84.0% | | 24V/3.0A |
| | @ 220Vac | 86.0% | 87.0% | | 24V/3.0A |
| | @ 277Vac | 86.0% | 87.0% | | 24V/3.0A |
| | | -5% | | + 5% | |
| | | -5% | | + 5% | |
| | PK-AV | | | 10% | |
| | | | | 10% | |
| | | | | 0.5S | 120Vac |
| | | | | 0.5S | 220Vac |
| | | -2% | | +2% | |
| | | -3% | | + 3% | |
| | | -0.03%/ | | +0.03%/ | 0 90 |
| | | 90 | 100 | 110 | > Tc Typ. < Tc Min. |
| | | | | 10W | |



SS-72AH LED



| | | | |
|--|------|-----------------|----------------------------|
| | 72 | 62,000 hours | 80% |
| | MTBF | 200,000 hours | 220Vac, 25 (MIL-HDBK-217F) |
| | | 90 | |
| | | 5 | 72 |
| | | 400g | |
| | | 244mm*40mm*21mm | x x |

25 LED












Vs.


Vs.



Vs.

(60)

Vs.

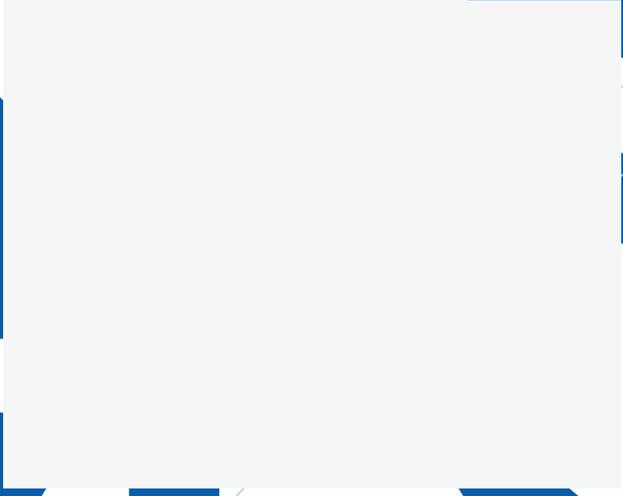

Vs.



Casēed

| | |
|-----|--|
| V-V | AC (400±10mm) H05RN-F 3*1.0mm ² 7.4mm, :L :N : |
| | DC (300±10mm) H05RN-F 2*1.0mm ² :7.0mm :V+ :V- |





1 , , 704

- mm) : × × = 370×280×160;
- 10
- 0.4kg 5kg
-
-

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



SS-72AH LED

9 SS-72AH LED 2019/12/28

| | | | |
|-----|--|------------|--|
| V00 | | 2019/12/28 | |
| | | | |
| | | | |
| | | | |
| | | | |

