

规格书

: SS-100CNL-G260*

: 100WLED

: V01

: 2023-09-05

*S

L


*动

“*” 表示附加功能：

“*”	AUX 12V (:H)	0-10V/PWM/Resistor	1-10V/PWM/Resistor (:B)	()	/ ()	
FB				✓		
FD					✓	
BB			✓	✓		
BD			✓		✓	
BHB	✓	✓		✓		
BHD	✓	✓			✓	

输入性能：


	220Vac		240Vac	
	180Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			0.55A	198Vac
			110W	198Vac
	(220Vac)		80A	
	(240Vac)		100A	
			0.5W	220Vac/50Hz (BHB/BHD)
	0.95	0.97		220Vac/50Hz
	0.90			220-240Vac/50Hz 70-100%
		8%	12%	220Vac/50Hz
			20%	220-240Vac/50Hz 70-100%




输出性能:

	180V		260V	
	200V		260V	Po=Vo*Io=100W
	0.385A		0.5A	0.5A 200V, 0.385A 260V
			310V	
	93.0%	93.5%		
	93.0%	94.0%		
	94.0%	95.0%		



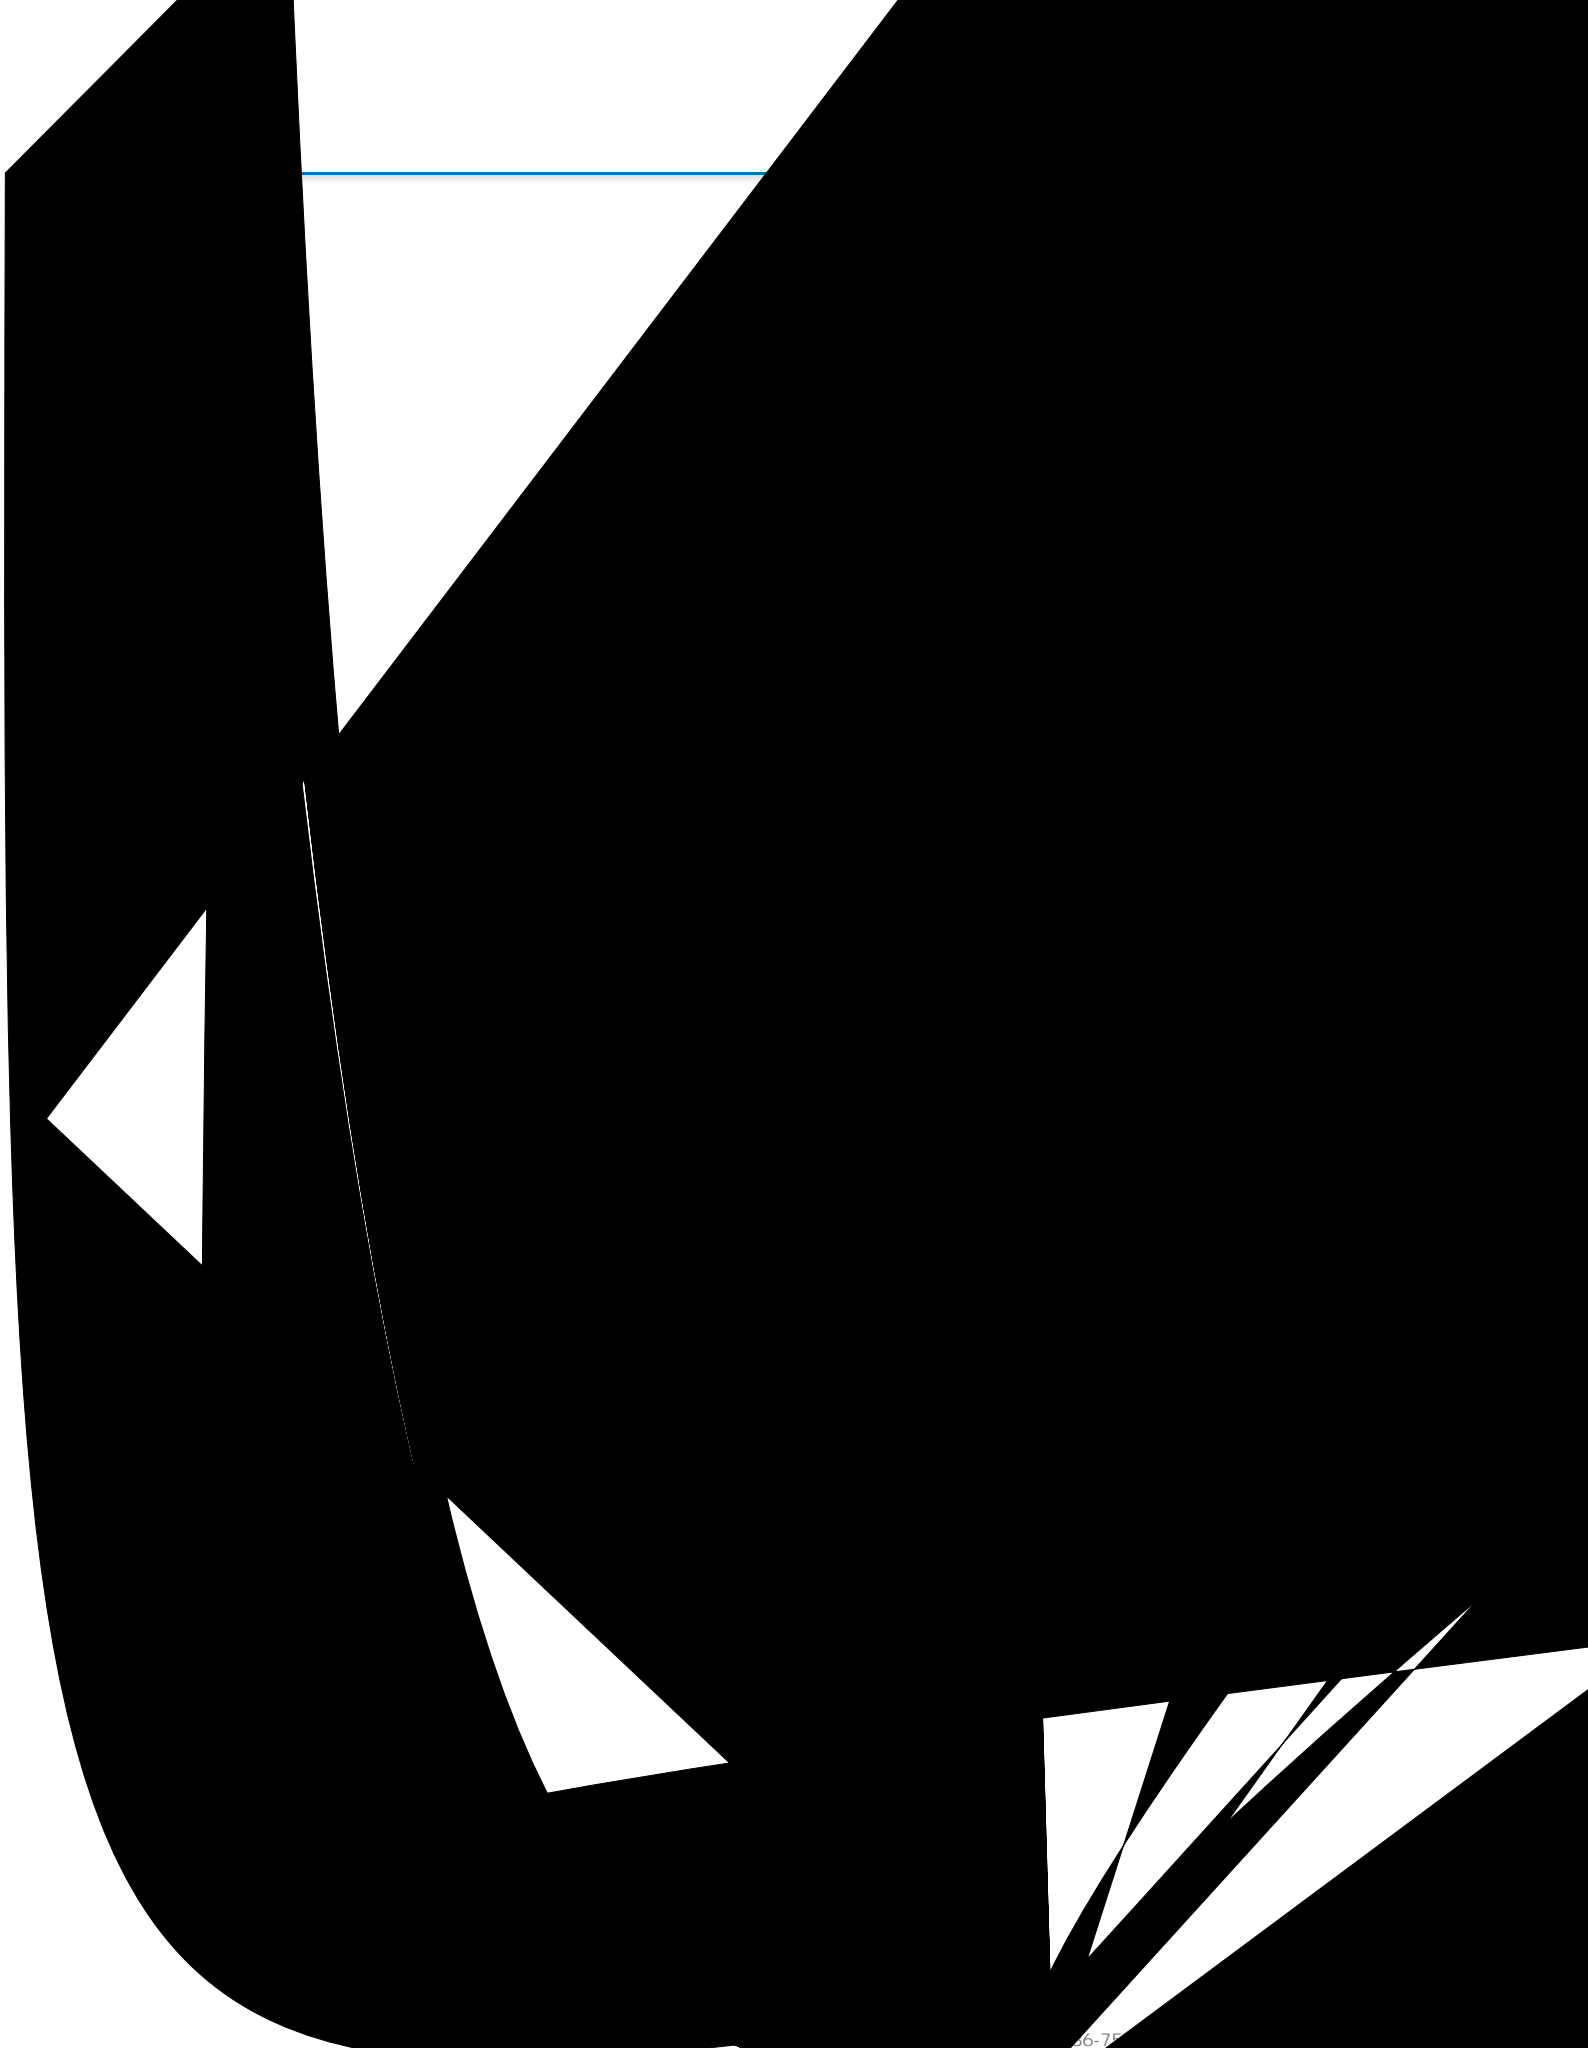







特性曲线:

Vs. (I/AOC)

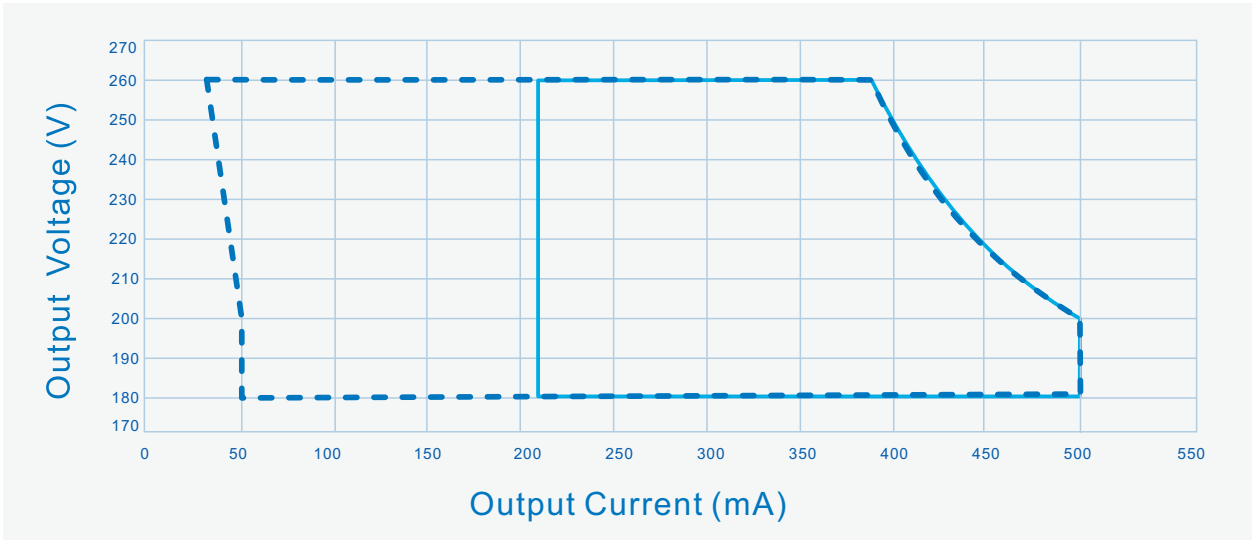

----- Dimming Window ————— AOC Window

Vs. (Vin=198Vac)

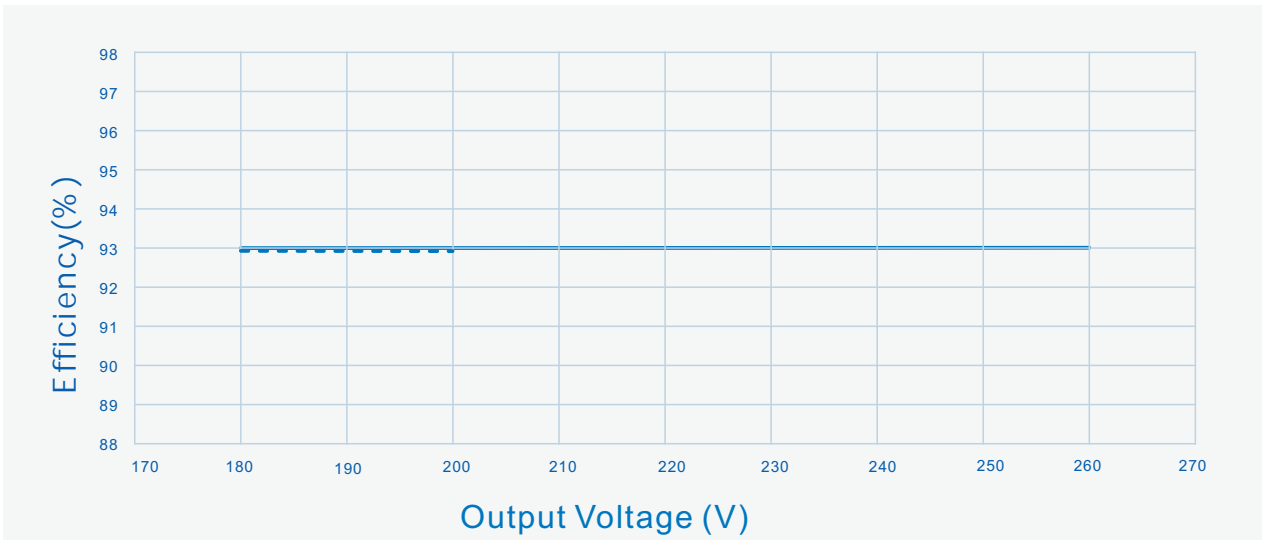

----- Io=500mA ————— Io=385mA



特性曲线：



特性曲线


Vs.



特性曲线:

Vs.


Vs.

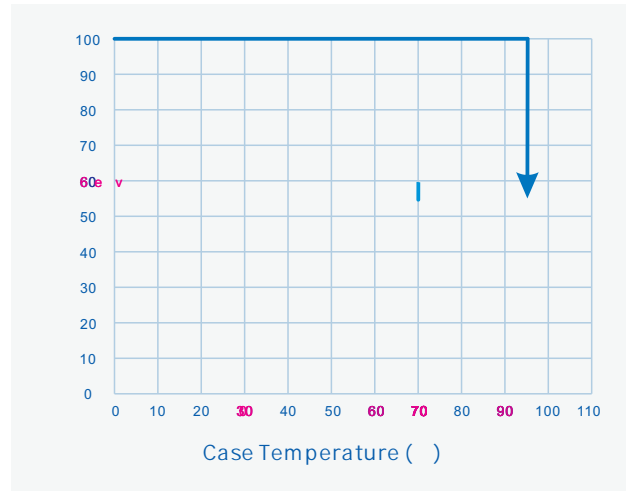

Vs.

Vs.






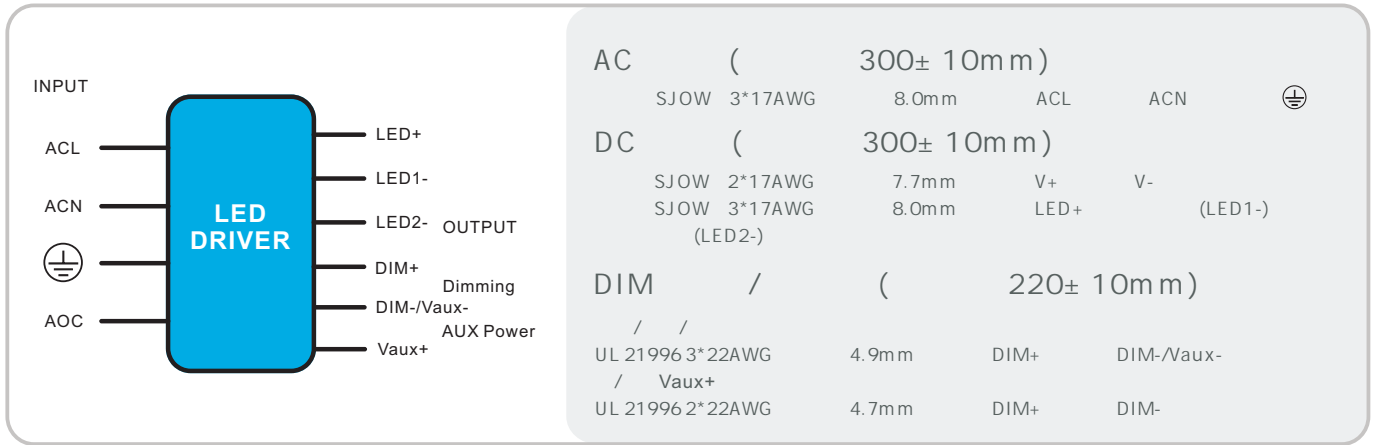

		mm (In.)
--	--	----------

	4-B	7.0(0.28)
	D	128(5.04)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	Y	32(1.26)

1 LED ;
 2 AC DC DIM / ;
 43± 5mm 10± 2mm;





注意事项

- 1. , , 704
- 2.
- 3. 5mm
- 4. LED+ LED- 1.8mm
- 5.
- 6. LED
- 7. LED
- 8. LED

包 装

- mm × × =495× 385× 162;
- 9
- 0.76kg 8.1kg
-

运 输

贮 存

GB 3873 83
1

RoHS

RoHS (2011/65/EU) 2015/863/EU

变更履历表



V00		2023/08/07	
V01		2023/09/05	

