


GREEN LED You start

S-150CNL-G LED

50CNL-G

05



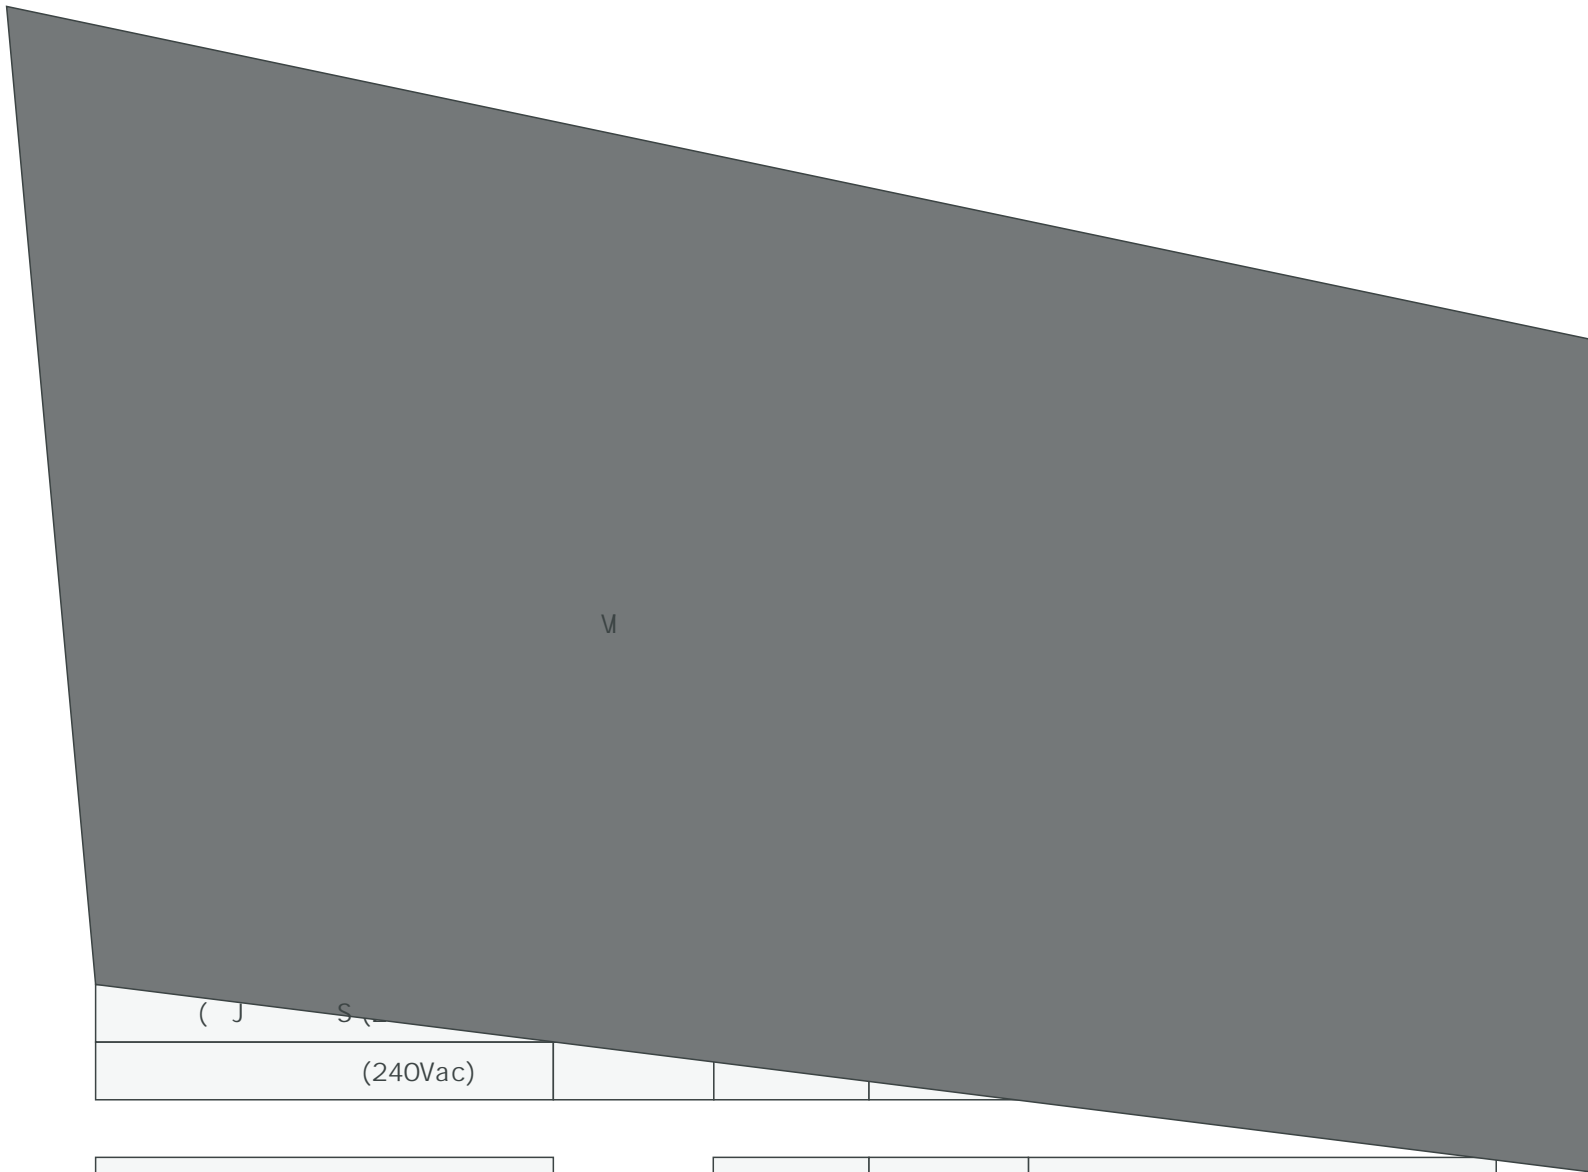

M

(J S

(240Vac)


0.97		220Vac/50Hz
		220-240Vac/50Hz 70-100%
8%	12%	220Vac/50Hz
	20%	220-240Vac/50Hz 70-100%



86-755-29358800



86-755-29358816







Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	



UL/cUL	UL8750		
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		




EMI/EMS	/	
	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B(6kV, 6kV)





	UL 绝缘要求	TUV绝缘要求	CCC绝缘要求	
	/	1500Vac	/	
	/	3000Vac	/	
	/	3000Vac	/	
	/	500Vac	/	
	10M			500Vdc
	0.1			25A/1min
	0.75mA			240Vac

1. EMC EMC
2. L/N / /

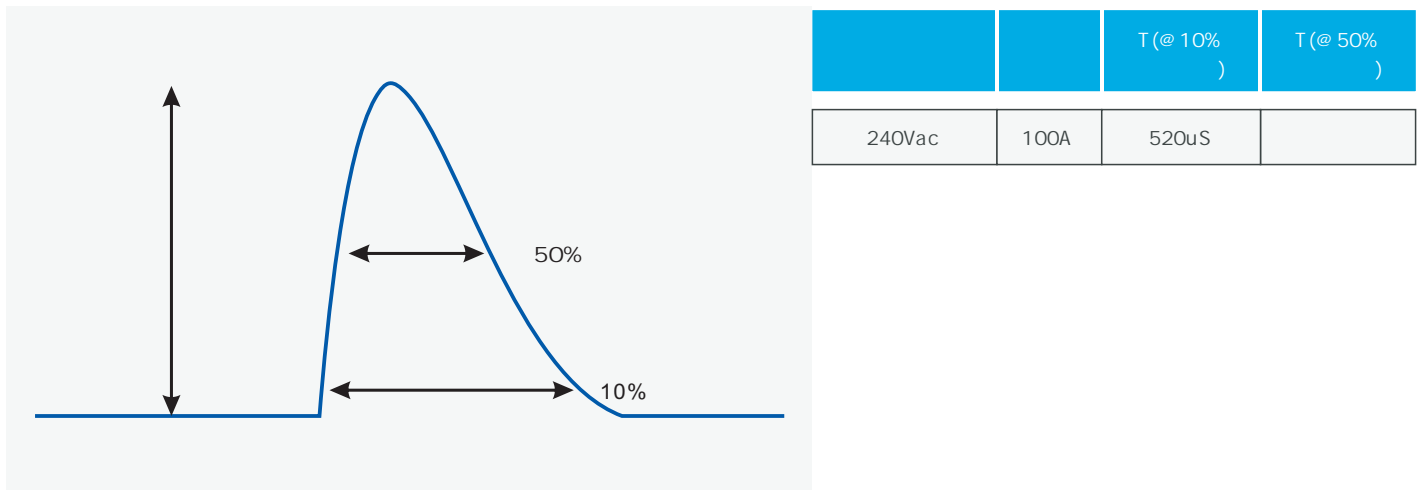

SS-150CNL-G

LED

Vs. (/AOC)

SHENZHEN SOSEN ELECTRONICS CO., LTD

Dimming Window

AOC Window

S



98

97

96

95

900

90

20

0

230

21


26

Vs.

Vs.

Vs.

Vs.

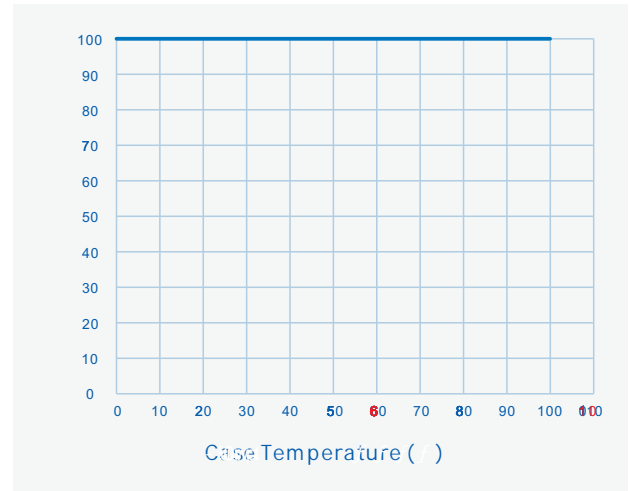

e M

Vs.

Vs.







1				704
2				
3		5mm		
4	LED+	LED-	1.8mm	
5				
6	LED			
7	LED			
8		LED		

-		mm	x	x	=495x 385x 162;
-		9			
-	0.735kg			7.9kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

	RoHS	(2011/65/EU)	2015/863/EU
--	------	--------------	-------------



V00.yÑ g [P	I• Ø08P	2023/01/10 ⁰⁰	

