

规格书

: SS-240CNL-G260*

: 240WLED

: V01

: 2023-09-05

崧盛电
LED DRIVER

LED DRIVER

型号列表:



SS-240CNL

“*” 表示附加


“*”	AUX 12V (:H)
FB	
FD	
BB	
BD	

%

输入性能:

	220Vac		240Vac	
			264Vac	
	47Hz	50/60Hz	63Hz	
			1.42A	198Vac
			255W	198Vac
(220Vac)			100A	
(240Vac)			130A	
			0.5W	220Vac/50Hz (BHB/BHD)
	0.95	0.97		220Vac/50Hz
	0.90			220-240Vac/50Hz 70-100%
		7%	12%	220Vac/50Hz
			20%	220-240Vac/50Hz 70-100%





SS-240CNL-G260*系列LED

输出性能:

	180V		260V	180-200V
	200V		260V	$P_o = V_o * I_o = 240W$
	0.92A		1.2A	1.2A 200V, 0.92A 260V
AOC	0.8A		1.2A	A
	0.65A		1.0A	B
	0.55A		0.75A	C
			310V	
@ 198Vac	93.0%	93.5%		260V/0.92A
@ 220Vac	93.0%	94.5%		260V/0.92A
@ 264Vac	94.0%	95.0%		260V/0.92A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	220Vac
	-2.5%		+2.5%	
	-6%		+6%	
	-0.1% /		+0.1% /	0 90
	90	100	110	>Tc Typ. <Tc Min.

SS-240CNL-G260*系列LED

其他性能:

AUX		10.8V	12V	13.8V	
				200mA	
0-10V		0V		12V	DIM+ 100uA
		10% Iomax		100% Ioset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 100uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 100uA
		10% Iomax		100% Ioset	
(BH)		0.7V	0.8V	0.95V	
		0.95V	1.1V	1.2V	
	85	50,000 hours			80% ,220Vac
	MTBF	200,000 hours			220Vac, , 25 (ML-HDBK-217F)
		IP 65			
		90			
		5			: 85
		760g			
		128mm *62.5mm			x

25 LED




SS-240CNL-G260*系列LED

安规测试项目:

	UL 绝缘要求	TUV绝缘要求	CCC绝缘要求	
	/	1500Vac	/	
	/	3000Vac	/	
	/	3000Vac	/	
	/	500Vac	/	
	10M			500Vdc
	0.1			25A/1min
	0.75mA			240Vac

- | | | | | |
|----|-----|---|---|-----|
| 1. | EMC | | | EMC |
| 2. | L/N | / | / | / |

特性曲线:

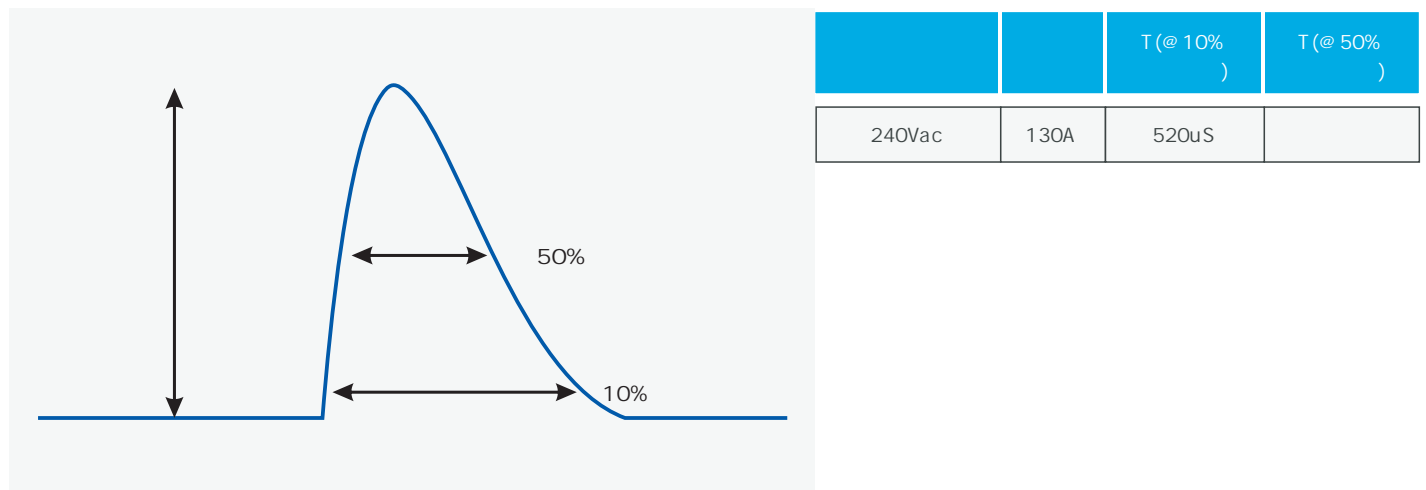


特性曲线:

特性曲线:

SS-240CNL-G260*系列LED


特性曲线:

Vs.

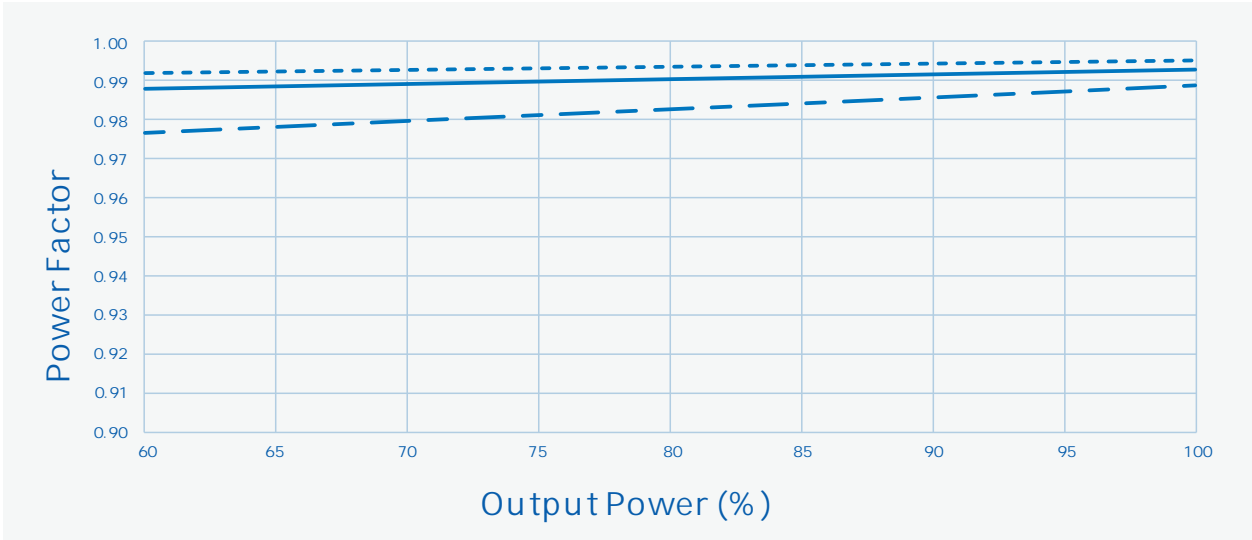

----- Vin=198Vac ——— Vin=220Vac - - - Vin=264Vac

Vs.

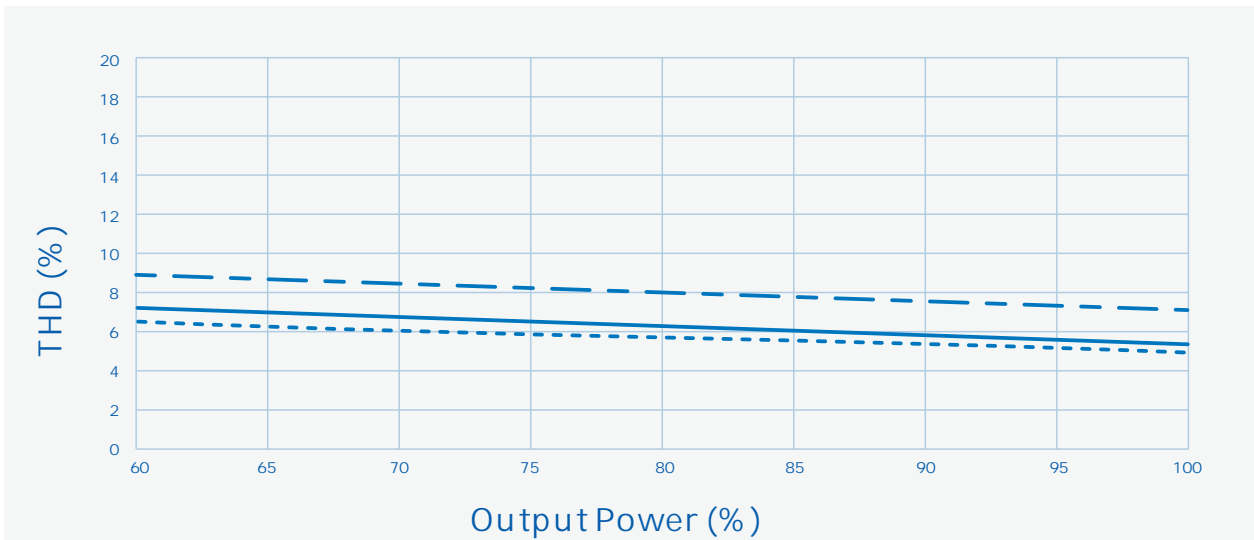


----- Vin=198Vac ——— Vin=220Vac - - - Vin=264Vac




SS-240CNL-G260*系列LED

特性曲线:


Vs.

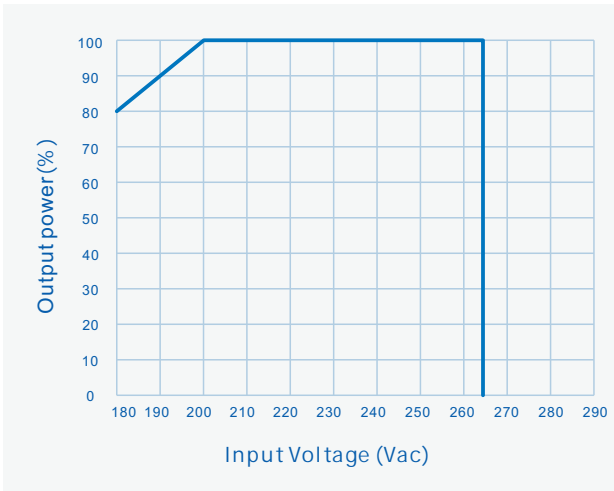


Vs.

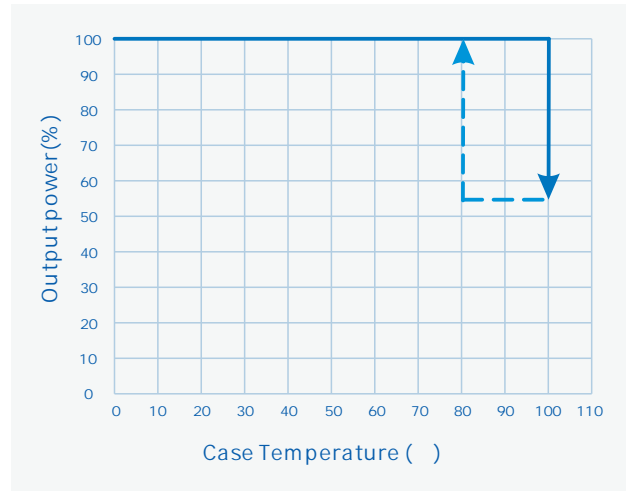


Vs.

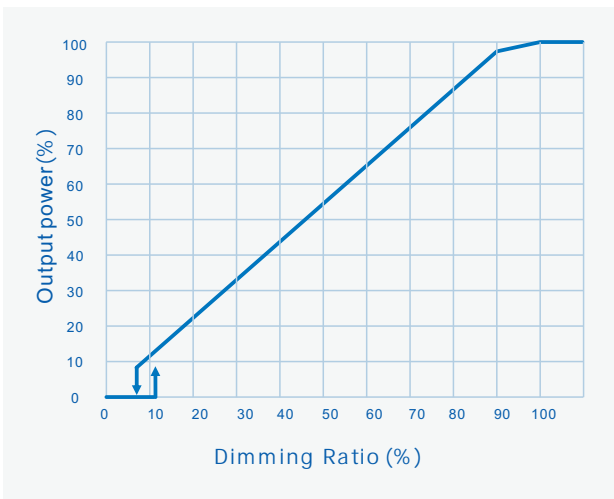

Vs.

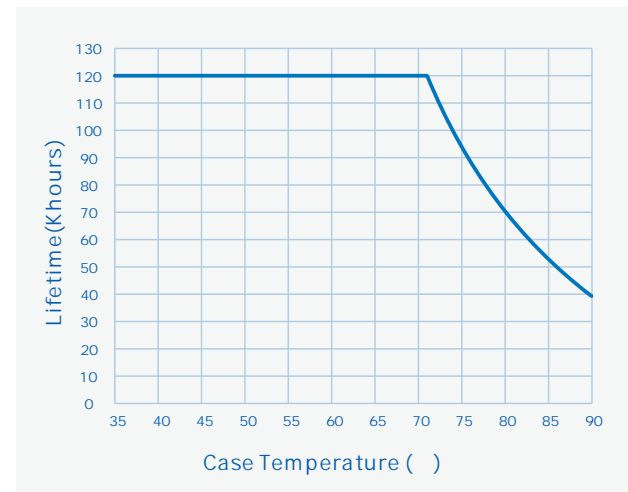





变更履历表

