



f

SS-240CNL-G LED

и ***** и

и жи	DALI (:D)	AUX 12V (:H)	0-10V/PWM/Resistor	1-10V/PWM /Resistor (:B)	
В				~	
ВН		~	✓		

	220Vac		240Vac	
	180Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			1.42A	198Vac
			255W	198Vac
(220Vac)			100A	
(240Vac)			130A	
			0.5W	220Vac/50Hz (BH)
	0.95	0.97		220Vac/50Hz
	0.90			220-240Vac/50Hz 70-100%
		7%	12%	220Vac/50Hz
			20%	220-240Vac/50Hz 70-100%

0



n o s

s⁰

LI s woson.

D

ΝĒ

1

0

3 86-755-29358800

86-755-29358816

e: www.sosen.com

Tcase	-40	25	+90	
10030	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	

UL/cUL	UL8750		
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015	~	
RCM	AS/NZS61347.2.13		
BIS	IS15885: 2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN 61347-1:2008+A1:2011+A2:2013		

EMI/EMS	/	
	EN IEC 55015: 2019+A11: 2020	
	EN IEC 55015: 2019+A11: 2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B(6kV, 6kV)

5/13






SS-240CNL-G LED

UL 绝缘要求	TUV绝缘要求	CCC绝缘要求	
/	1500Vac	/	
/	3000Vac	/	
/	3000Vac	/	
/	500Vac	/	
	10M	500Vdc	
	0.1	25A/1min	
	0.75mA		240Vac

EMC EMC

			,
2.	L/N	/	/

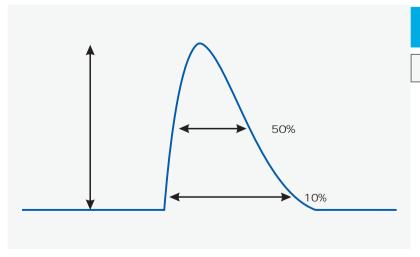


		T (@ 10%)	T (@ 50%)
240Vac	130A	520uS	

6/13


0

(/AOC Vs.)

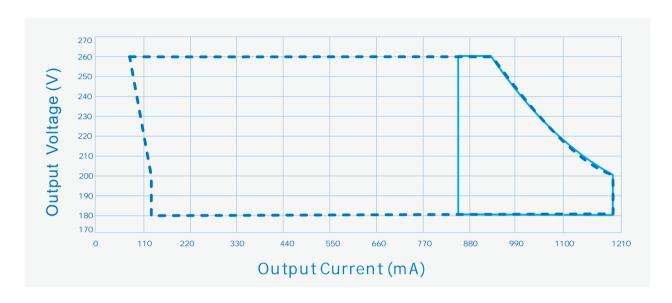

--- Dimming Window **AOC Window**

(Vin=198Vac) Vs.

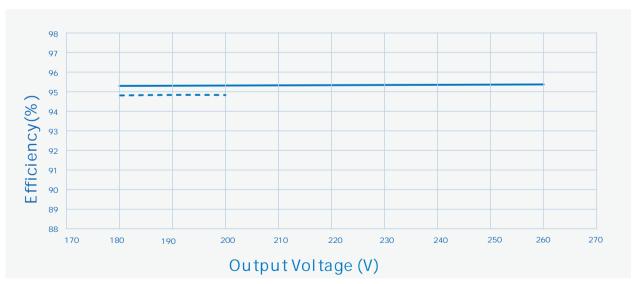


----- Io=1200m A Io=920m A

7/13

Vs.

Vs.



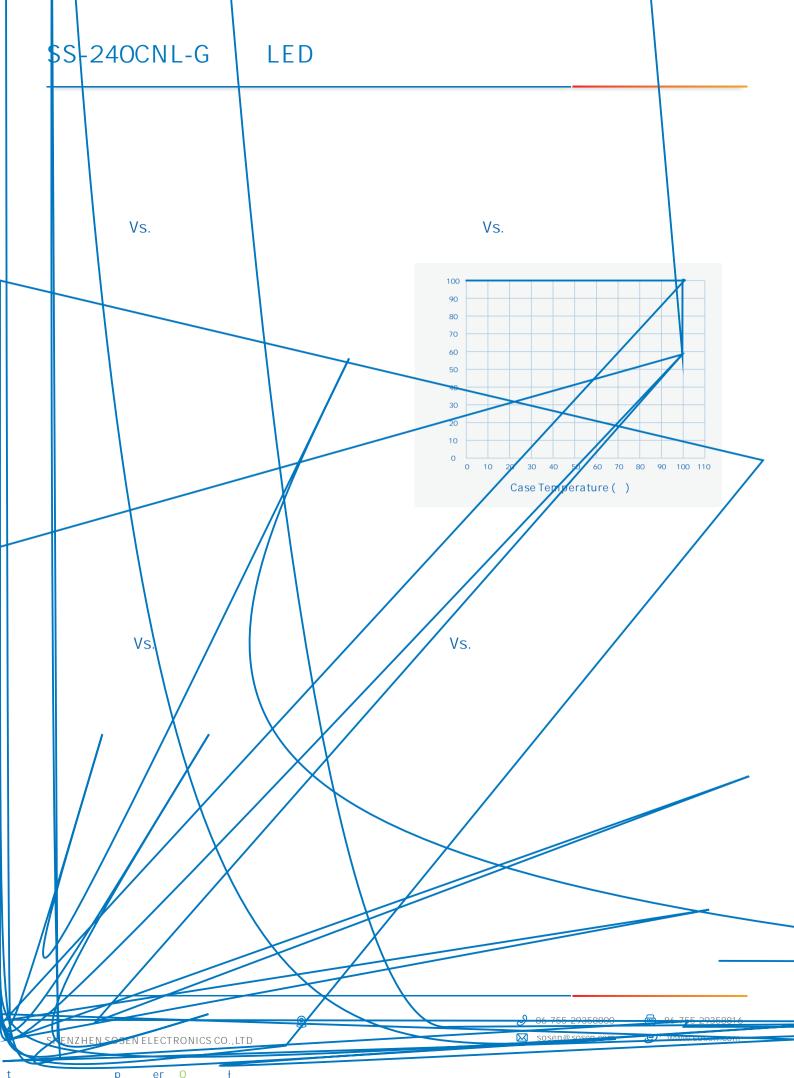









0



V00	2023/01/10	
V01	2023/04/14	
V02	2023/09/05	

