

Your Smart Choice

ï

î

ï

: SS-680MS-XX

: 680WLED

: V00

: 2023-08-02

崧盛电源
LED DRIVER



LED DRIVER

MS

SS-680MS

680W

LED

180V-528V

LED

LED

:

型号





| | | | | |
|----------|--------|------|--------|----------------------|
| | 200Vac | | 277Vac | |
| | 180Vac | | 528Vac | |
| | 47Hz | | 63Hz | |
| | | | 4A | 200Vac |
| (220Vac) | | | 12A | |
| (347Vac) | | | 19A | |
| (480Vac) | | | 25A | |
| | | | 2W | 347Vac/60Hz , |
| | 0.95 | 0.97 | | 347Vac/60Hz |
| | 0.90 | | | 200-480Vac 80% -100% |
| | | 5% | 10% | 347Vac/60Hz |
| | | | 20% | |



SS-680MS-200*)




| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

n.c

é / w

| | | | | | |
|--|--|--|--|--|--|
| | | | | | |
| | | | | | |

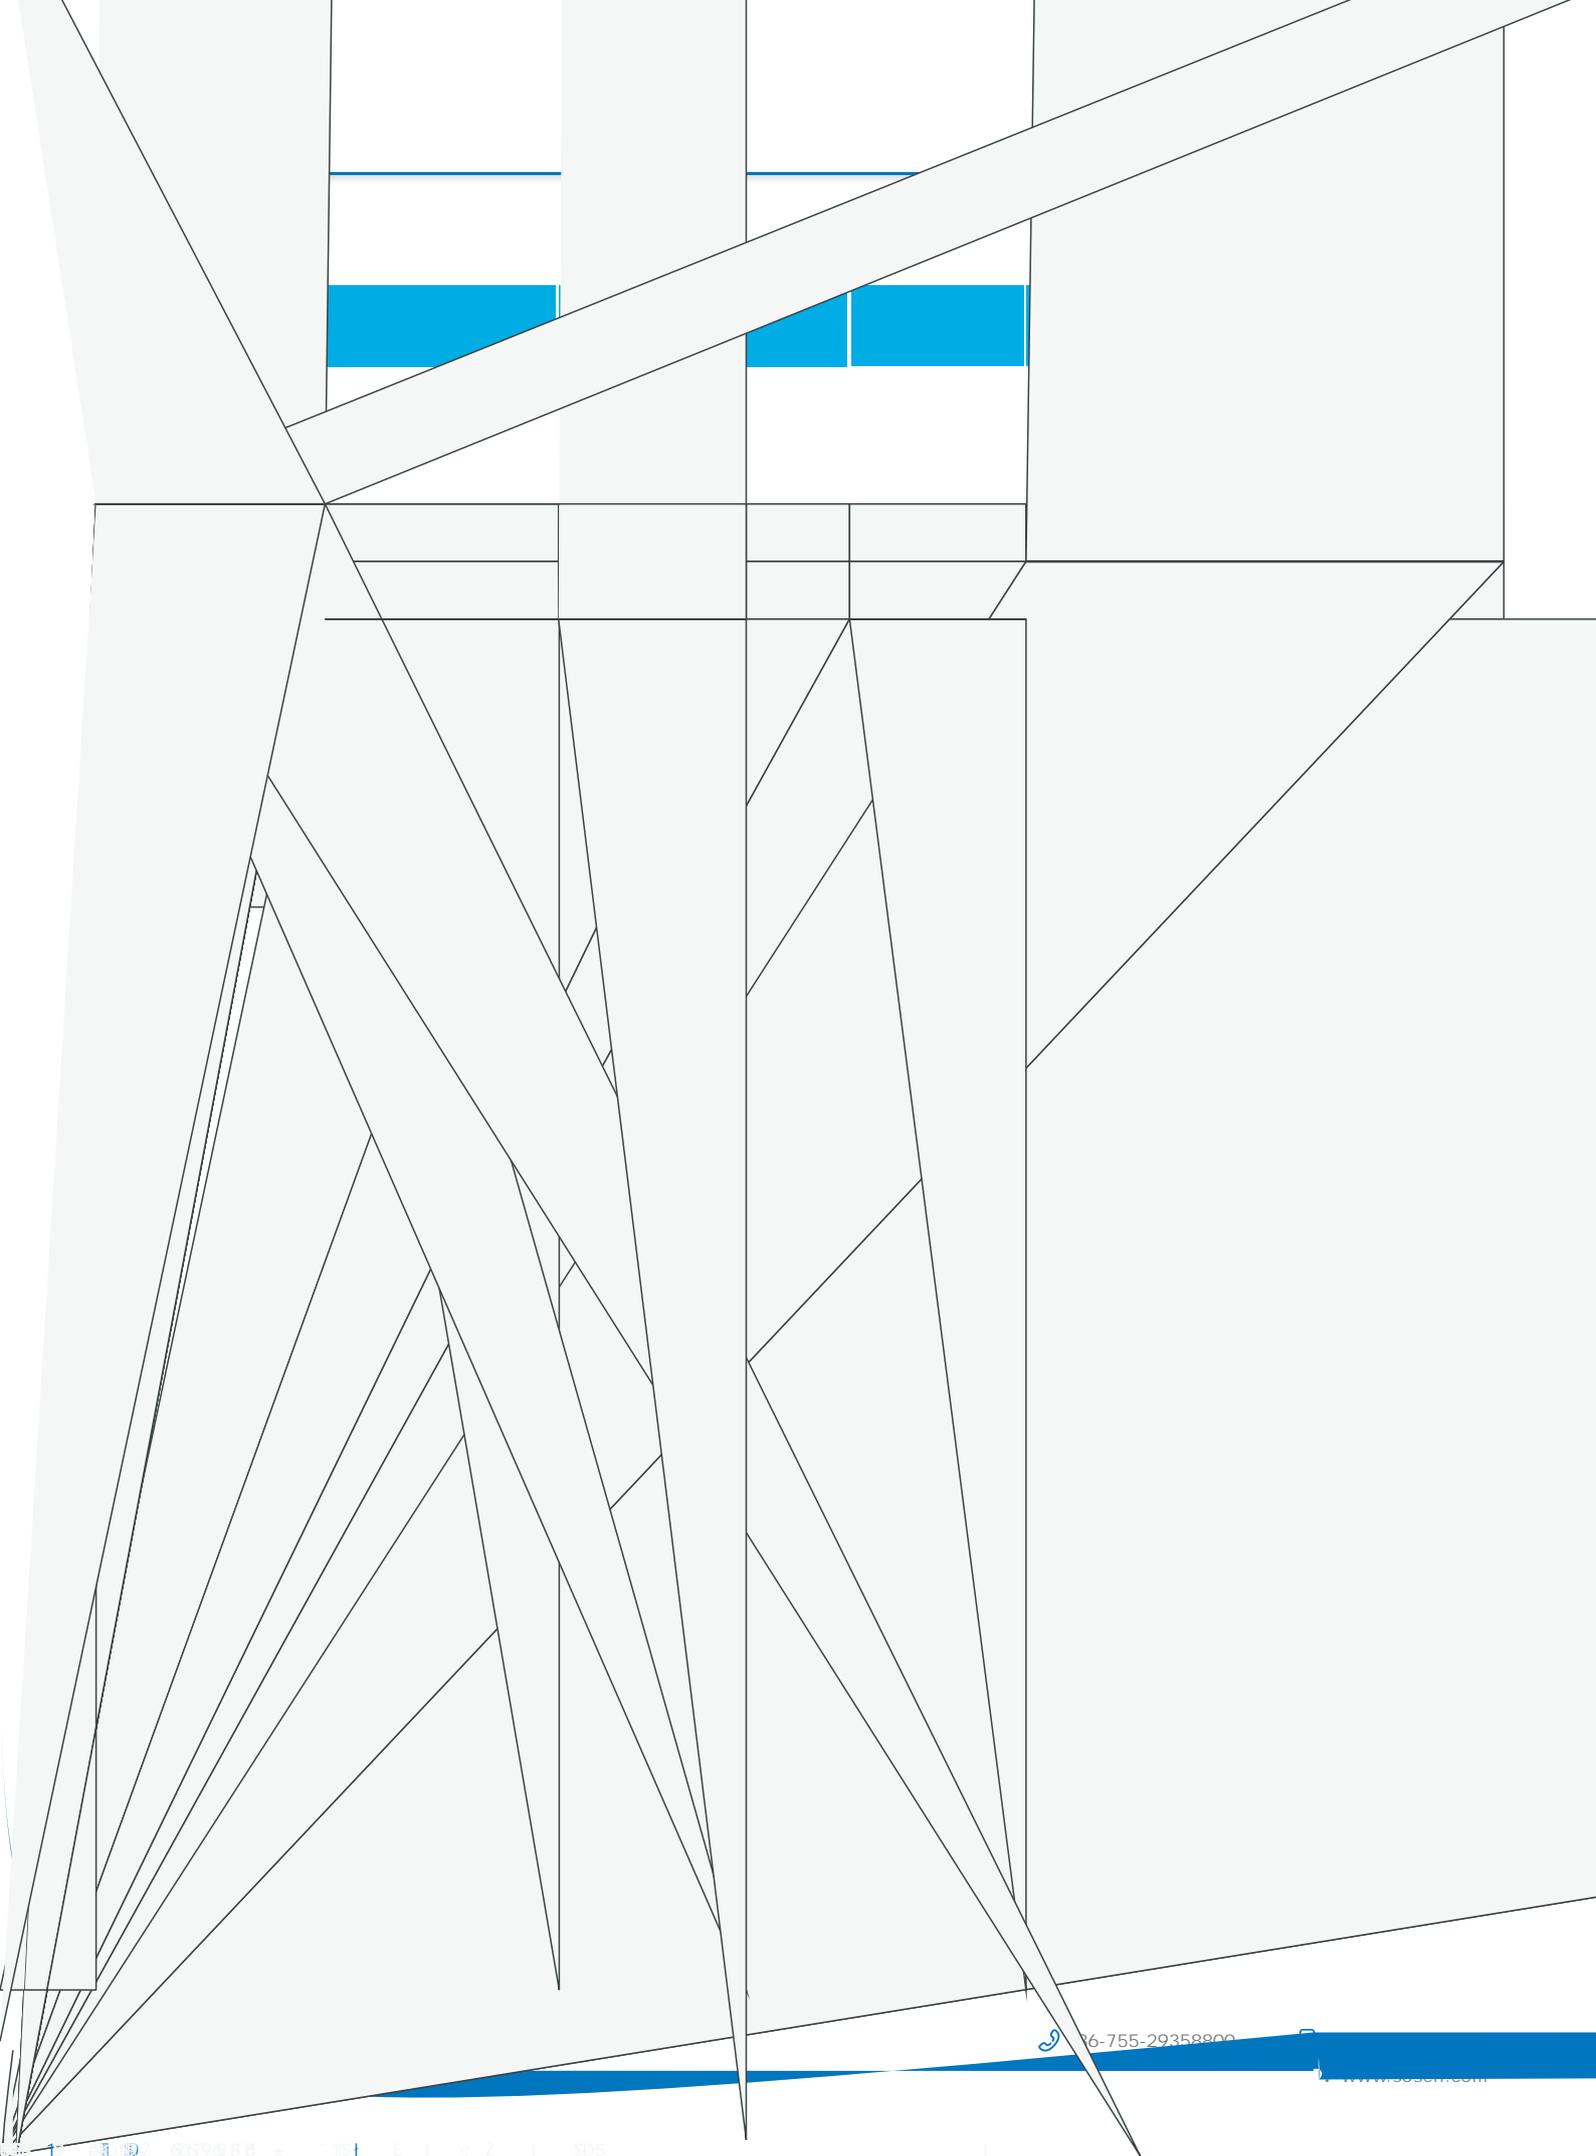

☎ 16-755-29358800



www.bossm.com


| | | | | |
|-------|--------|----|--------|--|
| | | | | |
| Tcase | -40 | 25 | +90 | |
| | -40 | 25 | +90 | |
| | 10% RH | | 90% RH | |
| | 5% RH | | 95% RH | |
| | -65m | | 4000m | |

| | | | | |
|--------|--|--|--|--|
| | | | | |
| UL/cUL | | | | |
| RCM | | | | |
| CCC | | | | |
| | | | | |






Vs.

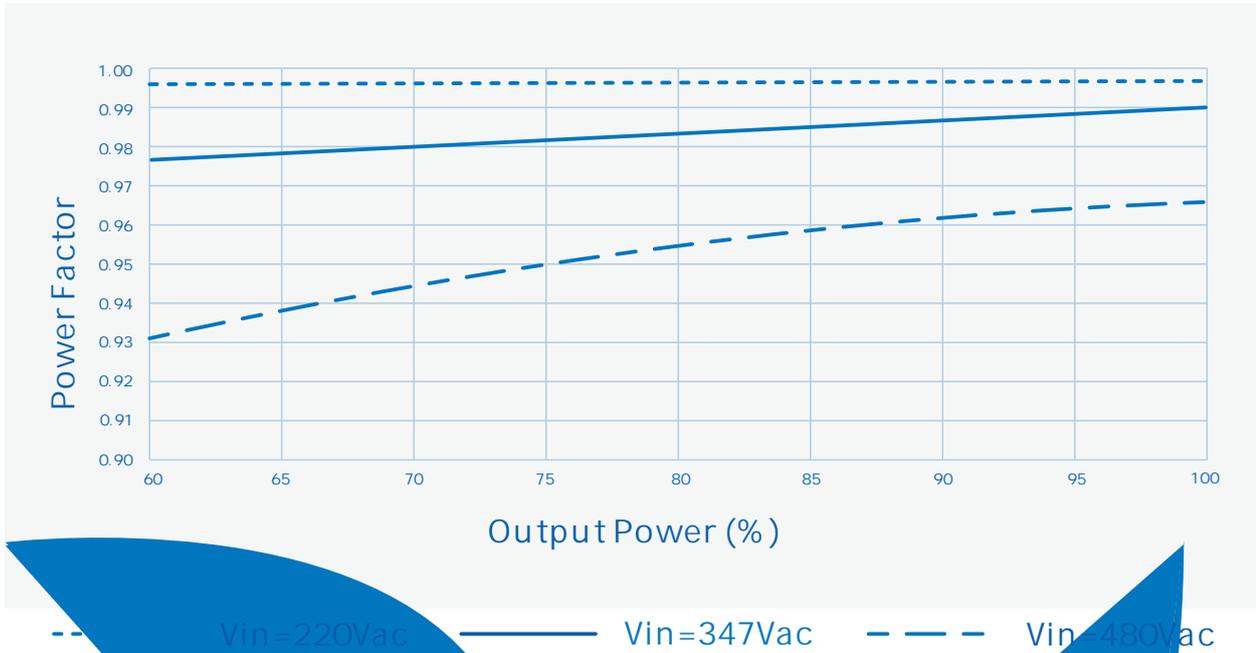

Vs.

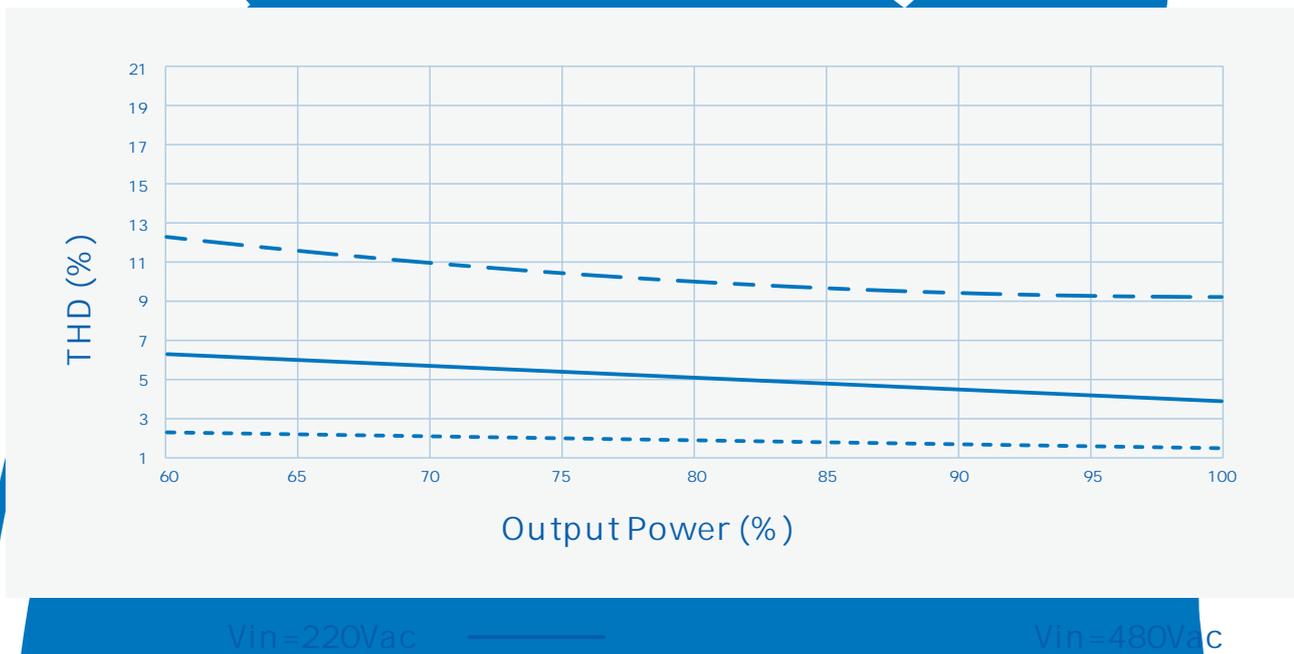

SS-680MS

LED

- 1
- 2
- 3

PC

USB

Programmer connector

INPUT

O/P



BB


Bottom cover assembly drawing for SS-680MS v1.0



| | | mm (In.) |
|--|----|------------|
| | L1 | 272(10.71) |
| | L2 | 261(10.28) |
| | L3 | 250(9.84) |
| | H | 44.5(1.75) |

1 LED ;
 2 AC DC DIM /
 / :
 43± 5mm 10± 2mm;

| | | mm (In.) |
|----|----|-----------|
| | W1 | 125(4.92) |
| | W2 | 78(3.07) |
| Tc | X | 82(3.23) |
| Tc | Y | 63(2.48) |

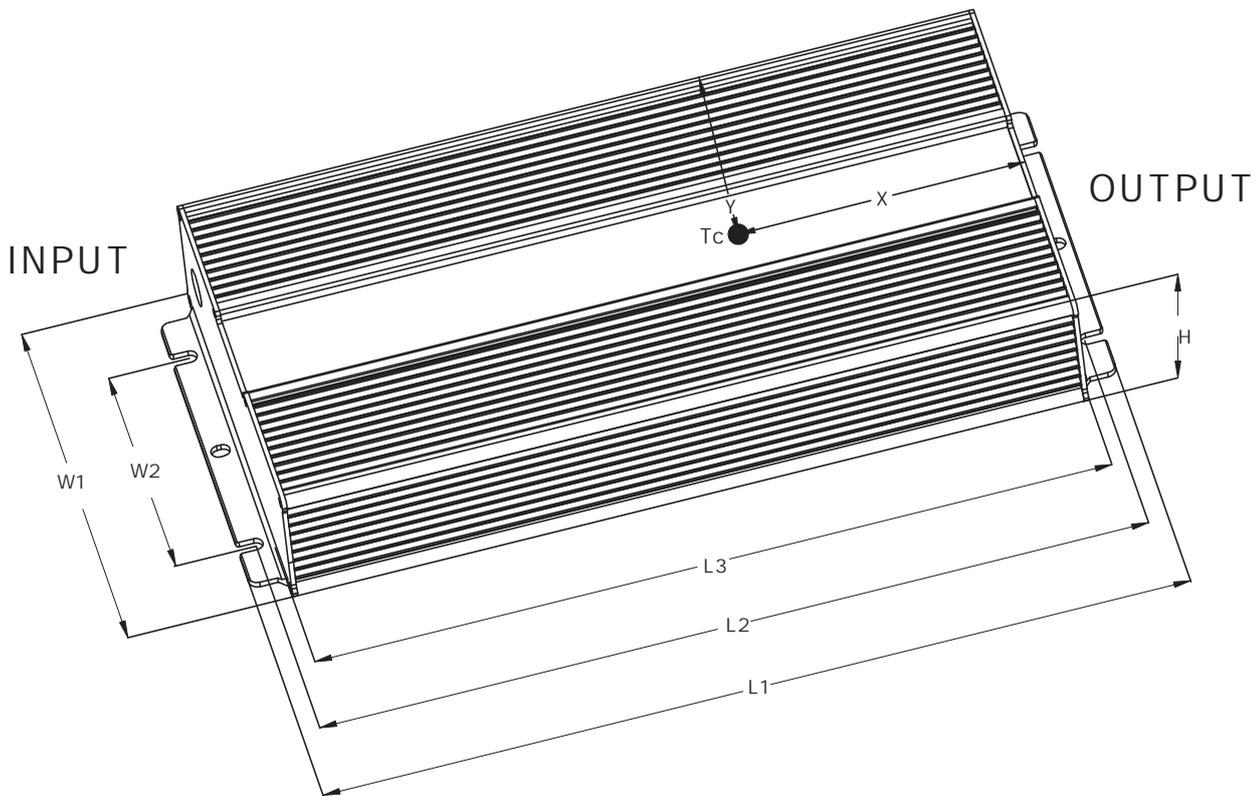





| | | | |
|-----|--|------------|--|
| V00 | | 2023/08/02 | |
| | | | |
| | | | |
| | | | |
| | | | |

