

Your Smart Choice


0 6 1 1 A € 8 á) b Đ

: SS-150CNL-E260*

: 150WLED

: V04

: 2023-11-15

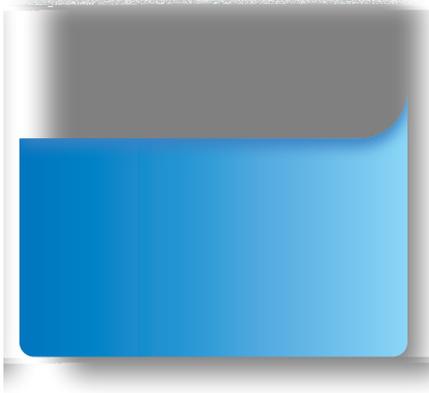

SS-150CNL-E (64) LED

" * "

" * "	DALI (:D)	AUX 12V (:H)	0-10V/PWM/Resistor	1-10V/PWM /Resistor (:B)	
B				✓	
BH		✓	✓		
D	✓				



	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			1.5A	120Vac
			180W	120Vac
(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz (BH)
	0.95	0.97		220Vac/50Hz
	0.90			120-277Vac/50Hz 70-100%
		8%	12%	220Vac/50Hz
			20%	120-277Vac/50Hz 70-100%





ac J

Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	

安规与电磁兼容标准:

UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
EAC	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 TP TC 004/2011 TP TC 020/2011	✓	
RCM	AS/NZS61347.2.13	✓	
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/	
	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B(6kV, 6kV)
	ANSI/C82.77-5-2017	B(6kV, 6kV)
	IEC/EN 61000-4-12:ANSI/C82.77-5-2017	B(6kV, 6kV)

ANSI/C82.77-5-2017





SS-150CNL-E (64)

Vs. (/AO)

Output

----- Dimming Window

s. (Vin=120Vac)




Vs. (Vin=277Vac)



Vs.

Vs.







1				704
2				
3			5mm	
4	LED+	LED-	1.8mm	
5				
6	LED			
7	LED			
8			LED	

-		mm	x	x	=495x 385x 162;
-		9			
-	0.735kg			7.81kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------



V00		2022/06/30	