

SOSEN LED Driver, Your Smart Choice

SS-120SN-E LED

: SS-120SN-EXX

: 120WLED

: V02

: 2023-11-17



	120Vac		347Vac	
	108Vac		380Vac	
	47Hz	50/60Hz	63Hz	
			1.4A	120Vac
			140W	120Vac
	(120Vac)		80A	
	(220Vac)		100A	
	(347Vac)		120A	
			1W	220Vac/50Hz ,
	0.93	0.97		220Vac/50Hz
	0.90			120-347Vac 70% -100%
		8%	12%	220Vac/50Hz
			20%	120-347Vac 100%



	180V		260V	
	200V		260V	Po=Vo*Io=120W
	0.46A		0.6A	0.6A 200V 0.46A 260V
AOC	0.42A		0.6A	
			310V	
@ 120Vac	88.0%	92.0%		260V/0.46A
@ 220Vac	90.0%	94.5%		260V/0.46A
@ 347Vac	90.0%	94.5%		260V/0.46A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
		0.5S	1.0S	120Vac
		0.5S	1.0S	347Vac
	-3%		+3%	
	-3%		+3%	
	-0.03% /		+0.03% /	0 90
	90	100	110	>Tc Typ., <Tc Min.,








Vs.

/AOC




Vs.

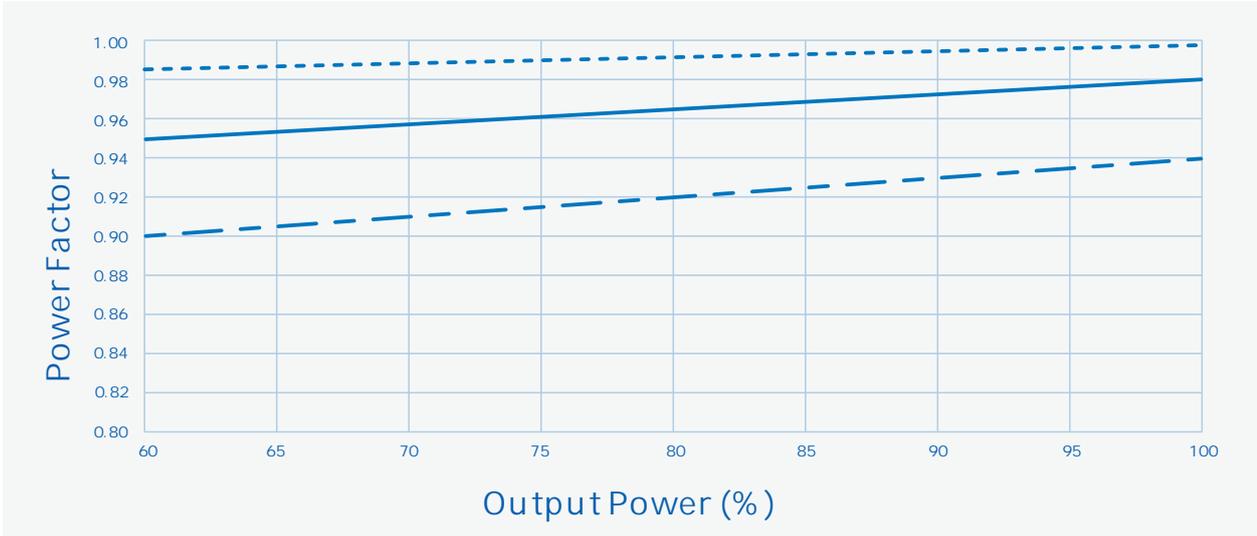

----- Vin=120Vac ————— Vin=220Vac - - - - Vin=347Vac

Vs.

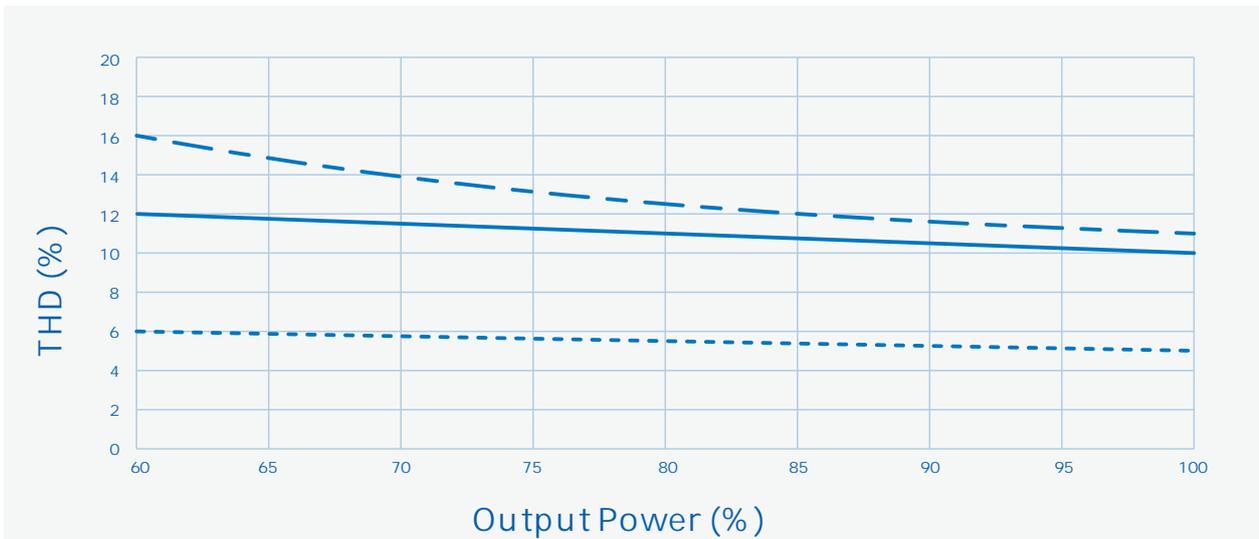


----- Vin=120Vac ————— Vin=220Vac - - - - Vin=347Vac





Vs.



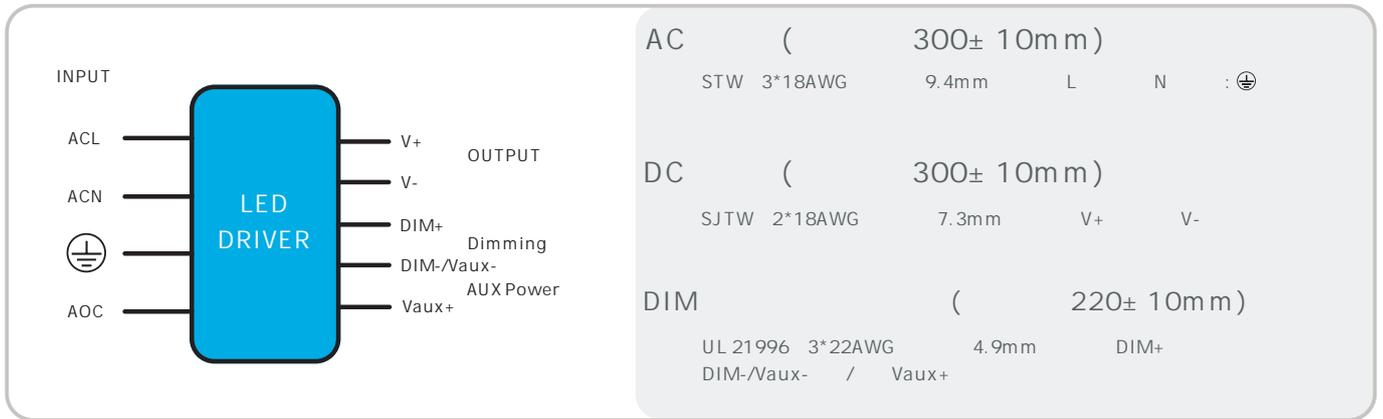

		mm (In.)
--	--	----------

	A	13(0.51)
	4-B	7.0(0.28)
	D	136(5.35)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	X	10(0.39)
Tc	Y	33(1.3)

1 LED ;
 2 AC DC DIM / / :
 43± 5mm 10± 2mm;

Dim	
-----	--



1				704
2				
3		5mm		
4	LED+	LED-	1.8mm	
5				
6	LED			
7	LED			
8		LED		

-		mm	×	×	=495× 385× 162;
-		9			
-	0.85kg			8.77kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------



V00		2023/02/01	
V01		2023/04/14	
V02		2023/11/17	

