

SOSEN LED Driver, Your Smart Choice

SS-200SN-E 260* LED

: SS-200SN-E 260*

: 200W LED


: V03

: 2023-11-17





	120Vac		347Vac	
	108Vac		380Vac	
	47Hz		63Hz	
			2.0A	120Vac

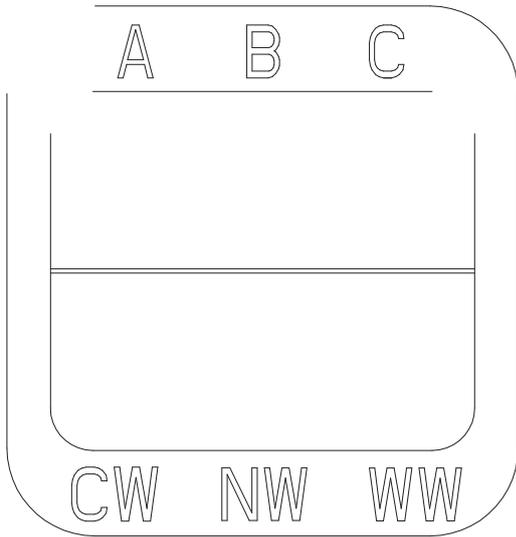

200W(A)-150W(B)-120W(C)
CW NW WW



	180V		260V	
	200V		260V	$P_o = V_o * I_o = 200W$
	0.77A		1.0A	1.0A 200V 0.77A 260V
AOC	0.7A		1.0A	A
	0.52A		0.85A	B
	0.42A		0.68A	C
			310V	
@ 120Vac	90.0%	92.0%		250V/0.8A
@ 220Vac	92.0%	95.0%		250V/0.8A
@ 347Vac	92.0%	95.0%		250V/0.8A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
		0.5S	1.0S	120Vac
		0.5S	1.0S	347Vac
	-3%		+3%	
	-3%		+3%	
	-0.03% /		+0.03% /	0 90
	90	100	110	>Tc Typ., <Tc Min.,



DA S ~

D

S-200SN-E 260*

LED

PP

b

††

Vs.

/AOC

†

©2017

86-755-29358816







Vs.




Vs.

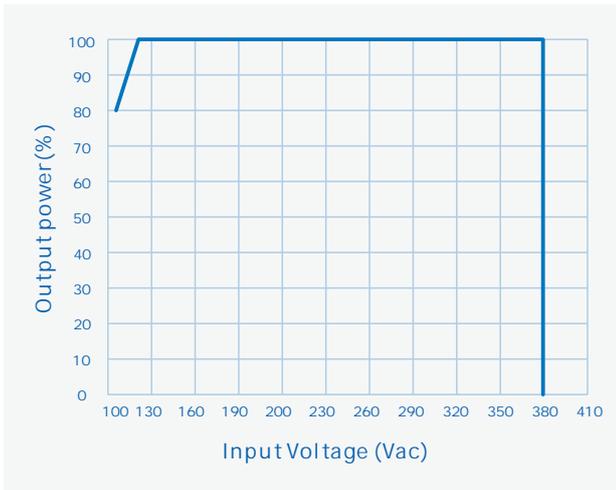


Vs.

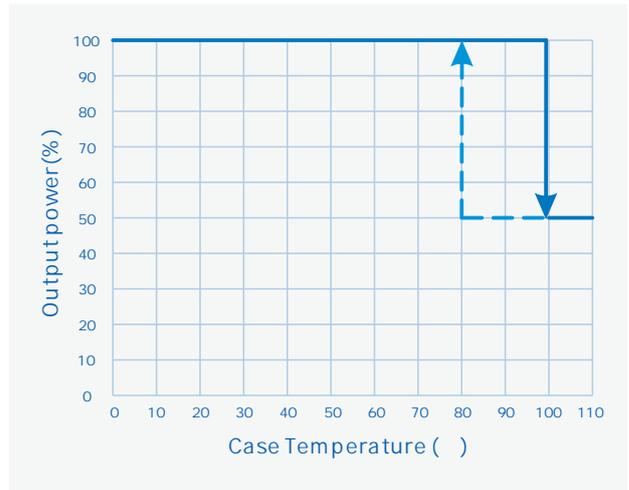

Vs.

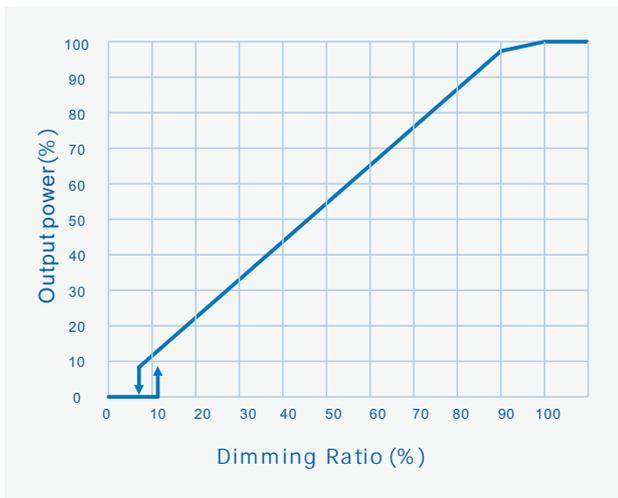


Vs.

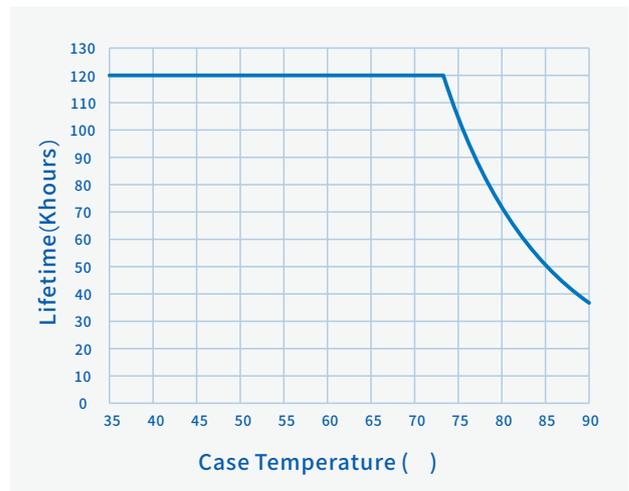

		mm (In.)
	A	13(0.51)
	4-B	7.0(0.28)
	D	136(5.35)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	X	10(0.39)
Tc	Y	33(1.3)

1 LED ;
 2 AC DC DIM / / :
 43± 5mm 10± 2mm;

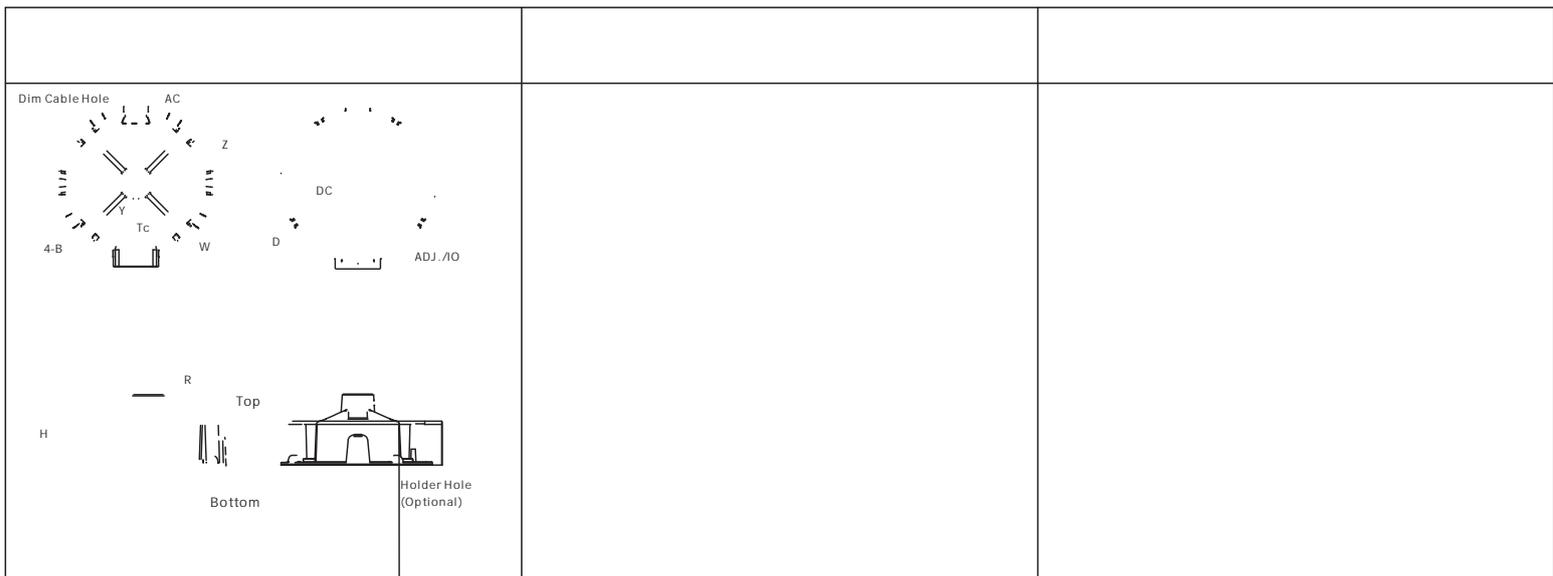

P •





V00		2023/05/25	
V01		2023/07/13	
V02		2023/08/22	
V03		2023/11/17	

