

: SS-120CNS-260*
: 120WLED
: V01
: 2024-02-26







" * "

" * "	AUX 12V (:H)	0-10V/PWM/Resistor	()	(/)	
BHB	✓	✓	✓		
BHD	✓	✓		✓	

	277Vac		480Vac	
	249Vac		528Vac	
	47Hz	50/60Hz	63Hz	
			1.4A	277Vac
			140W	277Vac
(277Vac)			80A	冷机启动
(347Vac)			100A	冷机启动
(480Vac)			120A	冷机启动
			1.5W	347Vac/60Hz ,
	0.93	0.97		277-480Vac/60Hz
	0.90			277-480Vac/60Hz 70-100%
		8%	10%	277Vac/60Hz
			15%	347-480Vac/60Hz
			20%	277-480Vac/60Hz 70-100%





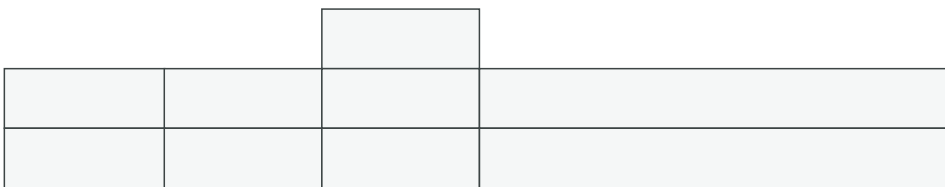





Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	


UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS		
/		
	FCC Part15: Subpart B; ANSI 63.4:2014	Class A 4dB
	FCC Part15: Subpart B; ANSI 63.4:2014	Class A 4dB
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (6kV 6kV)
	ANSI/C82.77-5-2017	B (6kV 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV 6kV)


Vs.

/AOC


Vs. (Vin=347Vac)

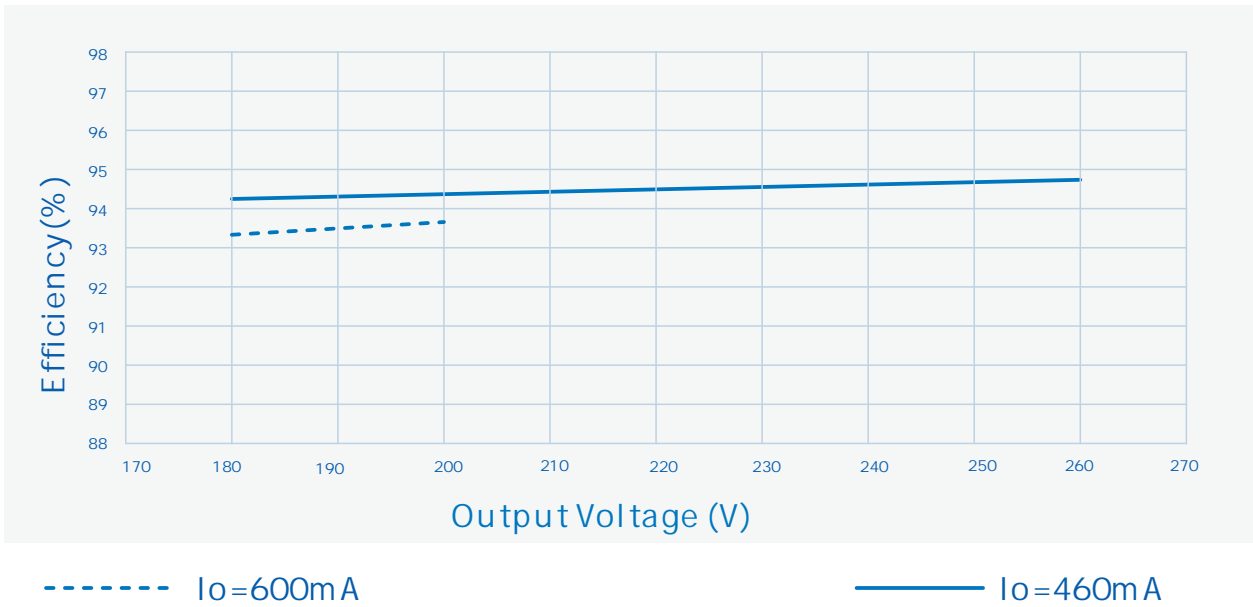

Vs. (Vin=480Vac)

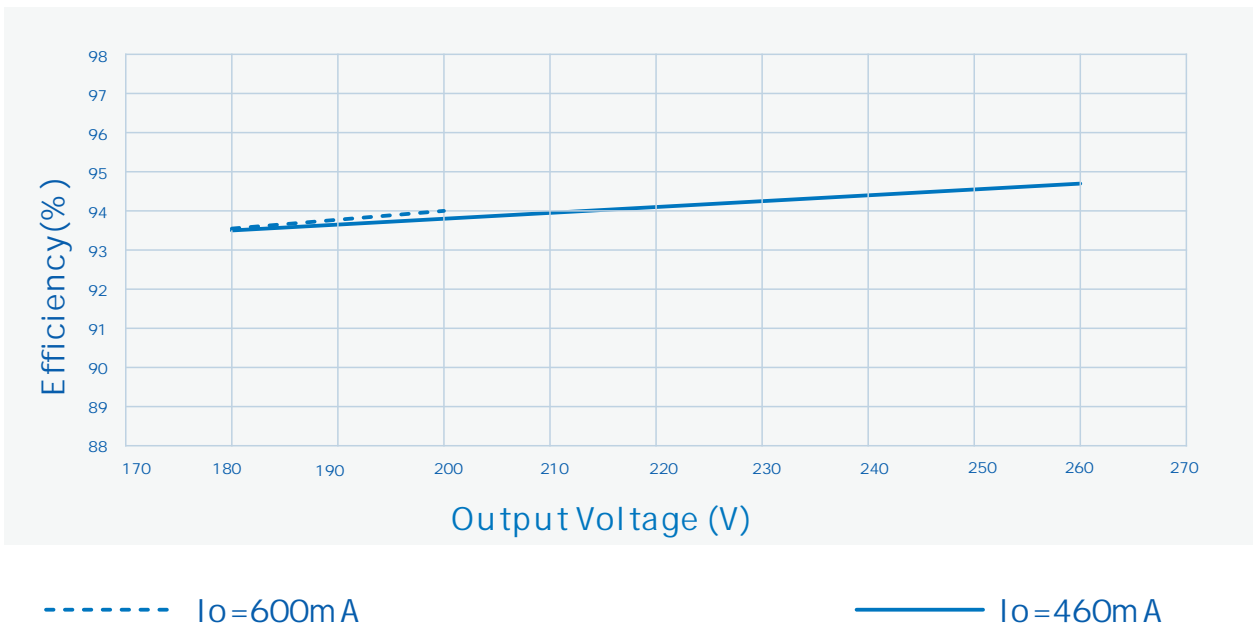


Vs.

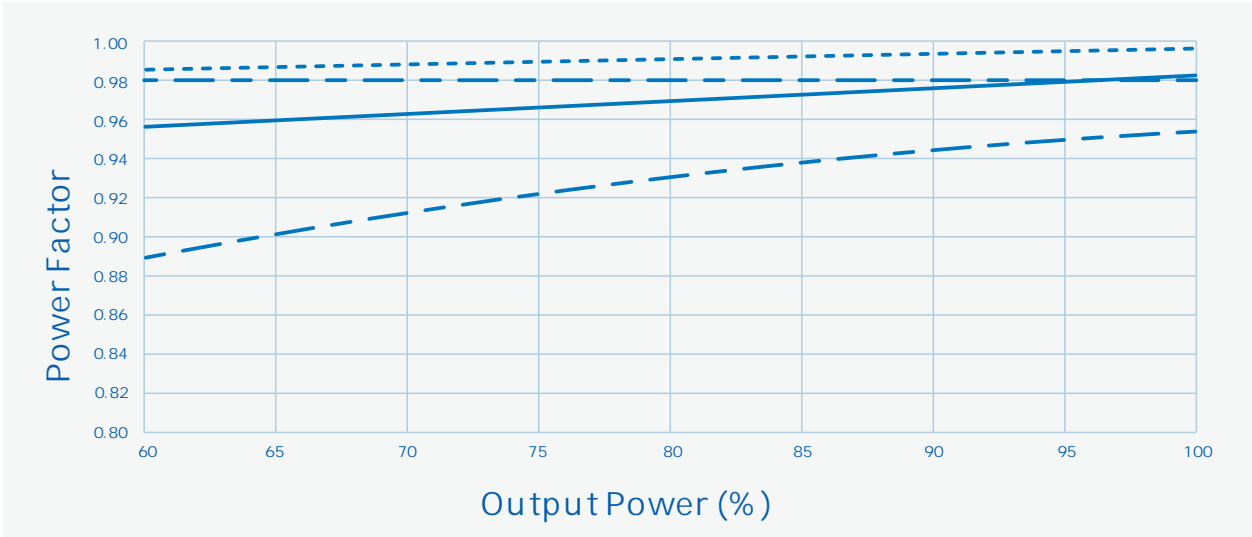



----- Vin=277Vac ——— Vin=347Vac - - - Vin=480Vac

Vs.

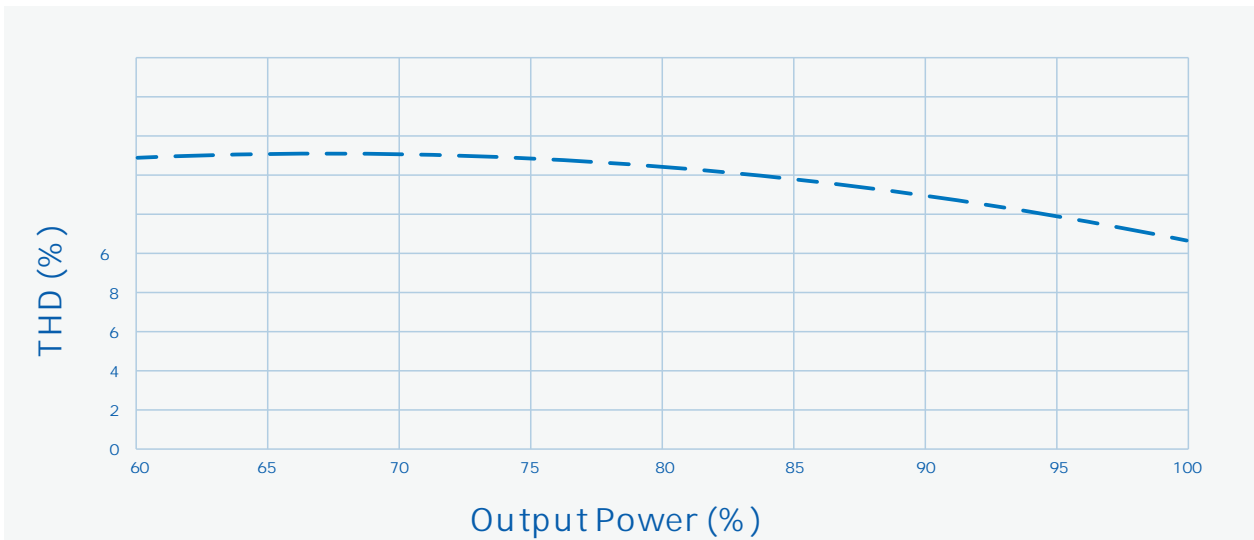

----- Vin=277Vac ——— Vin=347Vac - - - Vin=480Vac



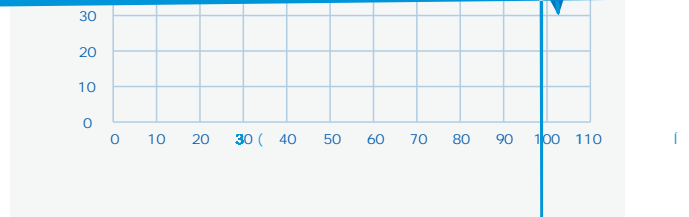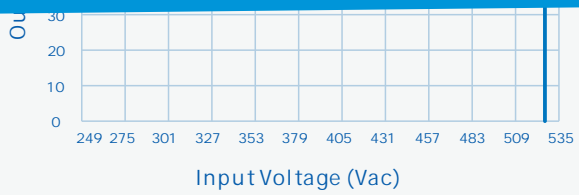


Vs.

Vs.



		mm (In.)

1 LED ;
 2 AC DIM / / :
 DC 43± 5mm 10± 2mm;

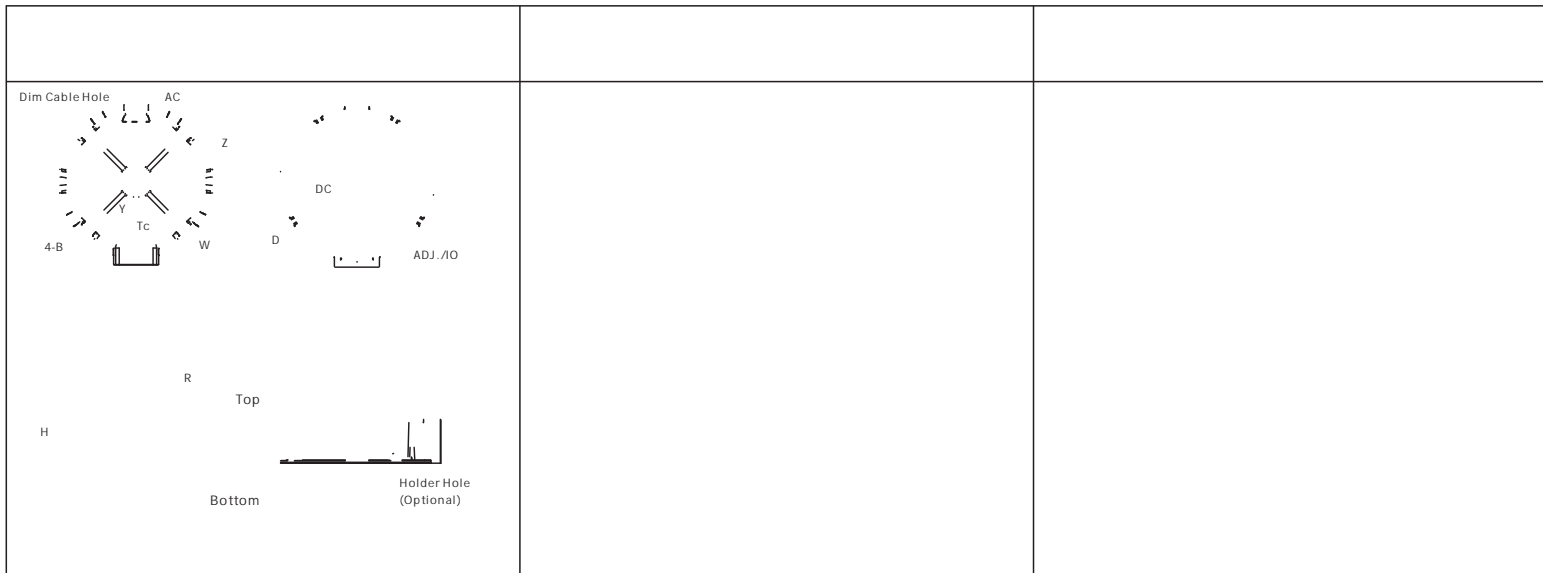



1				704
2				
3		5mm		
4	LED+	LED-	1.8mm	
5				
6	LED			
7	LED			
8		LED		

-		mm	x	x	=495x 385x 162;
-		9			
-	0.925kg			9.425kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------





V00		2023/10/17	