

# SOSEN LED Driver, Your Smart Choice

SS-120CF      LED      S

: SS-120CF-XX

: 120WLED

: V00

: 2024-05-10



“\*”

“*”	ON-OFF	AUX 12V ( :H)	0-10V/PWM/Resistor ( :B)	
	✓			
BH		✓	✓	



额定输入电压范围	100Vac		240Vac	参考曲线
	90Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			1.4A	100Vac
			140W	100Vac
			56A	230Vac
			0.5W	230Vac/50Hz ,
	0.93	0.95		100Vac/50Hz
	0.90			120-240Vac 70% -100%
		7%	9%	220Vac/50Hz
			10%	120-240Vac 70% -100%






--	--	--	--








--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	

--	--	--	--

CCC	GB 19510.14-2009 GB 17625.1-2022 GB/T17743-2021	✓	
-----	---	---	--

EMI/EMS	/	
---------	---	--

	GB/T17743-2021	
	GB/T17743-2021	
	GB 17625.1-2022	
	GB/T17626.5-2019	B 6kV 4kV
	GB/T17626.12-2023	B 4kV 4kV






---

Vs.

/AOC




Vs.

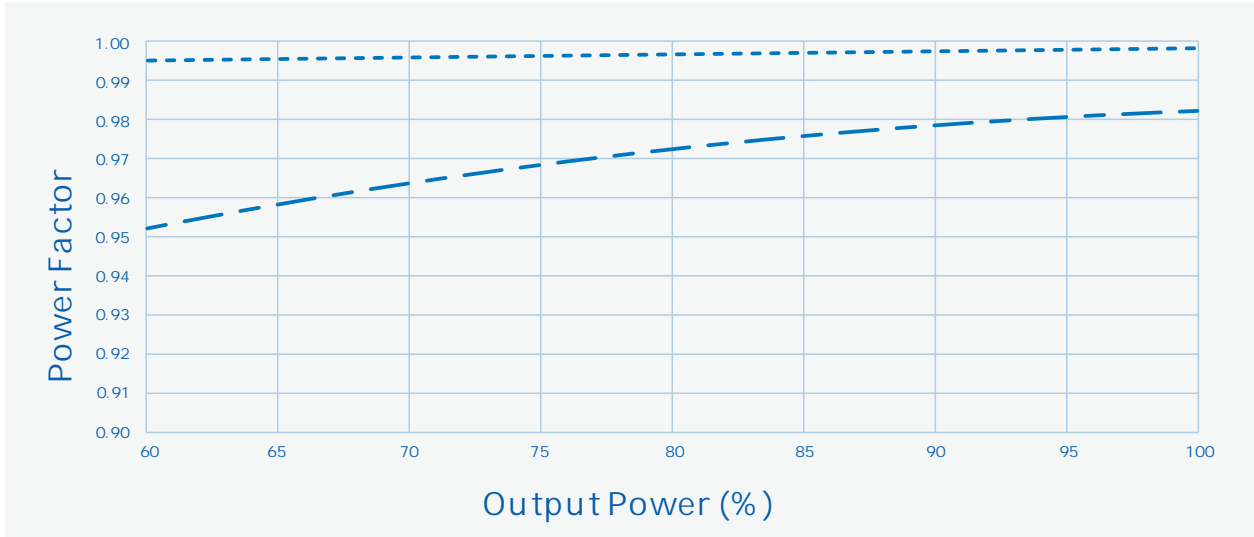

----- Vin=100Vac

- . - . Vin=230Vac

Vs.

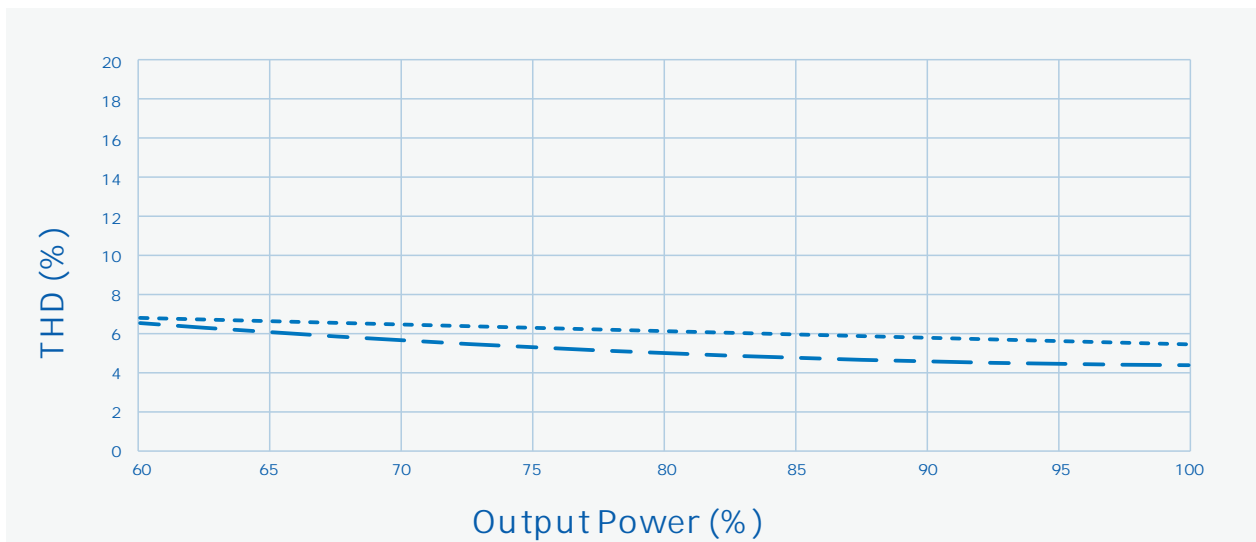


----- Vin=100Vac


- . - . Vin=230Vac




Vs. (230Vac)

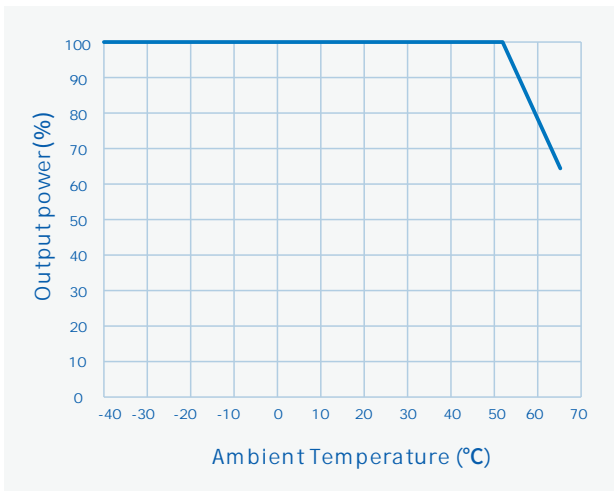


Vs.

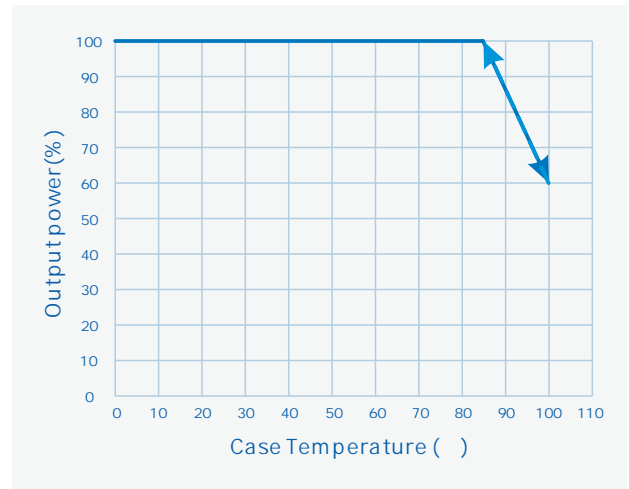


Vs.

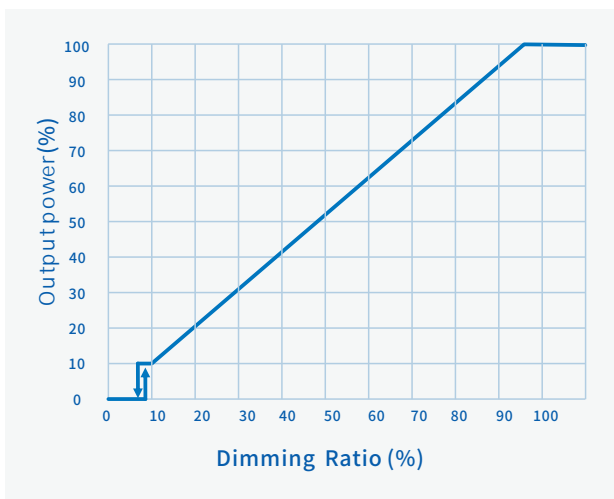

Vs.

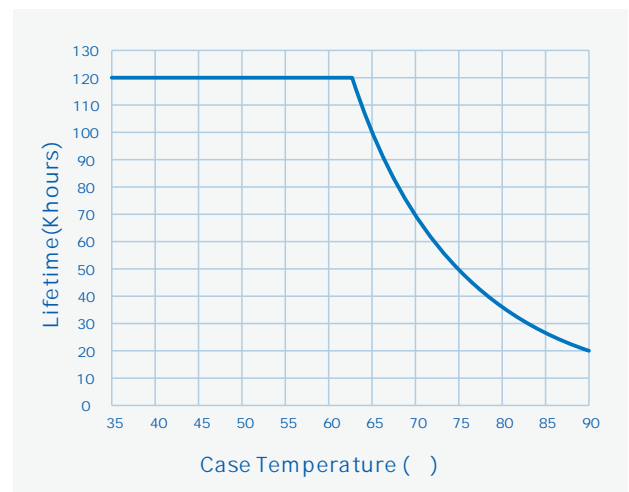

Vs.

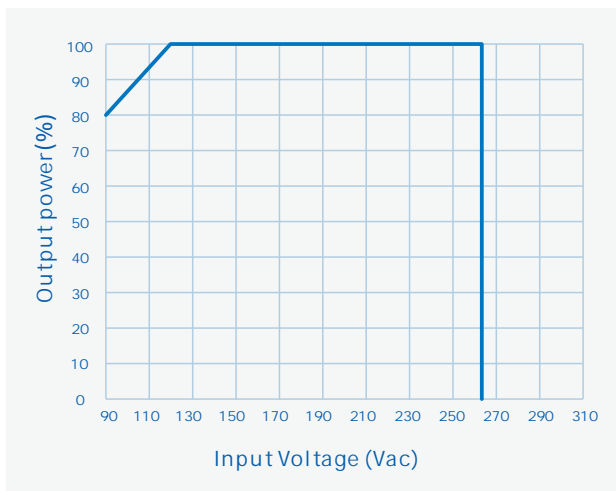





1 , , 704

2

- mm × × =495× 385× 162;

- 18

- 0.745kg 15.175kg

-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU





V00		2024/05/10	

