


: SS-110PA-XXF  
: 110W Class I/II NFC DALI-2 & D4i  
: V01  
: 2024-06-01

> I R C 7 DE B

AA } r B t | @ || WT

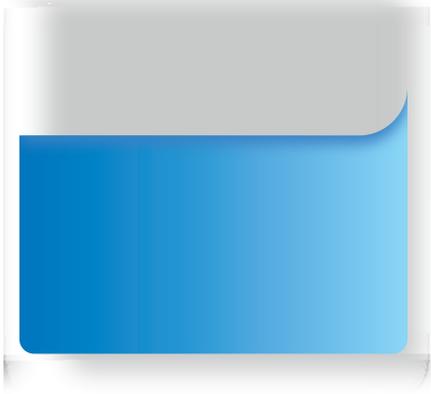

	220Vac		240Vac	
AC	80Vac		264Vac	AC
DC	168Vdc		280Vdc	
	47Hz	50/60Hz	63Hz	
			0.8A	200Vac
(230Vac)			20A	
	-1%		+1%	230Vac
			0.5W	230Vac/50Hz DALI-2
	0.96	0.98		230Vac/50Hz
	0.9			220-240Vac/50Hz 30-100%
		6%	10%	230Vac/50Hz
			20%	220-240Vac/50Hz 30-100%





(SS-110PA-160F)

	52V		160V	52-105V
	105V		160V	Po=Vo*Io=110W
	0.7A		1.05A	1.05A 105V,0.7A 160V
AOC	0.2A		1.05A	NFC
			180V	
@ 230Vac	90.0%	93.0%		160V/0.7A
	-5%		+5%	
PK-AV		5%	10%	
(P <sub>stLM</sub> )			1	
(SVM)			0.4	
			10%	
			0.7S	230Vac ,
	-1%		+1%	
	-3%		+3%	
	-0.03% /		+0.03% /	0 90
	92	95	100	



(SS-110PA-245F)

	81V		245V	81-157V
	157V		245V	Po=Vo*Io=110W
	0.45A		0.7A	0.7A 157V,0.45A 245V
AOC	0.2A		0.7A	NFC
			270V	
@ 230Vac	90.0%	93.0%		245V/0.45A
	-5%		+5%	
PK-AV		5%	10%	
(P <sub>stLM</sub> )			1	
(SVM)			0.4	
			10%	
			0.7S	230Vac ,
	-1%		+1%	
	-3%		+3%	
	-0.03% /		+0.03% /	0 90
	92	95	100	





	SS-110PA-245F	10% loiset	loiset	450mA	loiset	700mA
	SS-110PA-160F			700mA	loiset	1050mA
	SS-110PA-105F			1050mA	loiset	1500mA
	SS-110PA-245F	45mA	loiset	45mA	loiset	450mA
	SS-110PA-160F	70mA		70mA	loiset	700mA
	SS-110PA-105F	105mA		105mA	loiset	1050mA



10

0








Vs. ( /AOC )

SS-110PA-105F

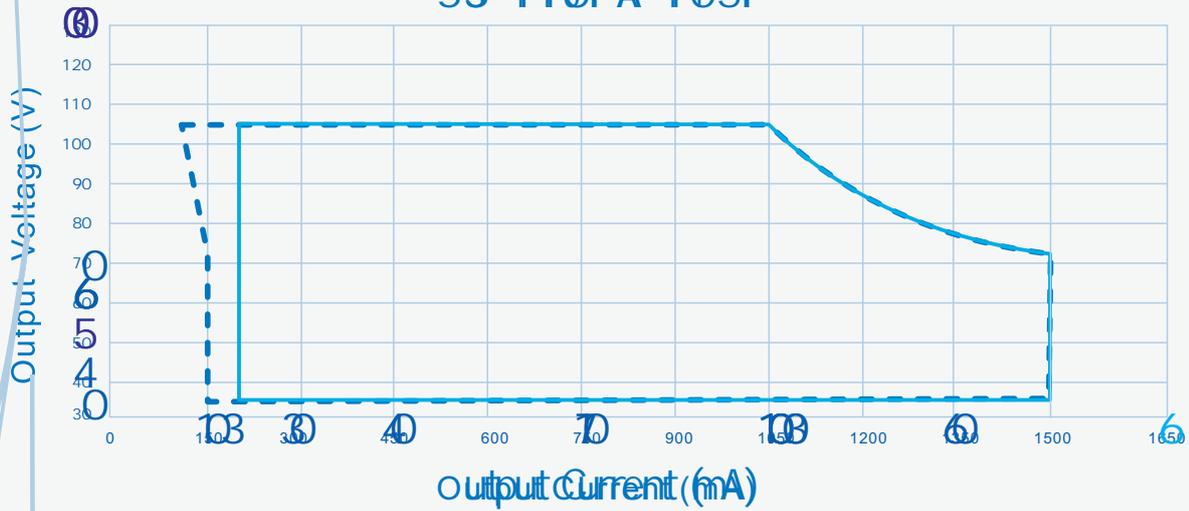


----- Dimming Window

————— AOC Window

OC Window




Vs. ( /AOC )

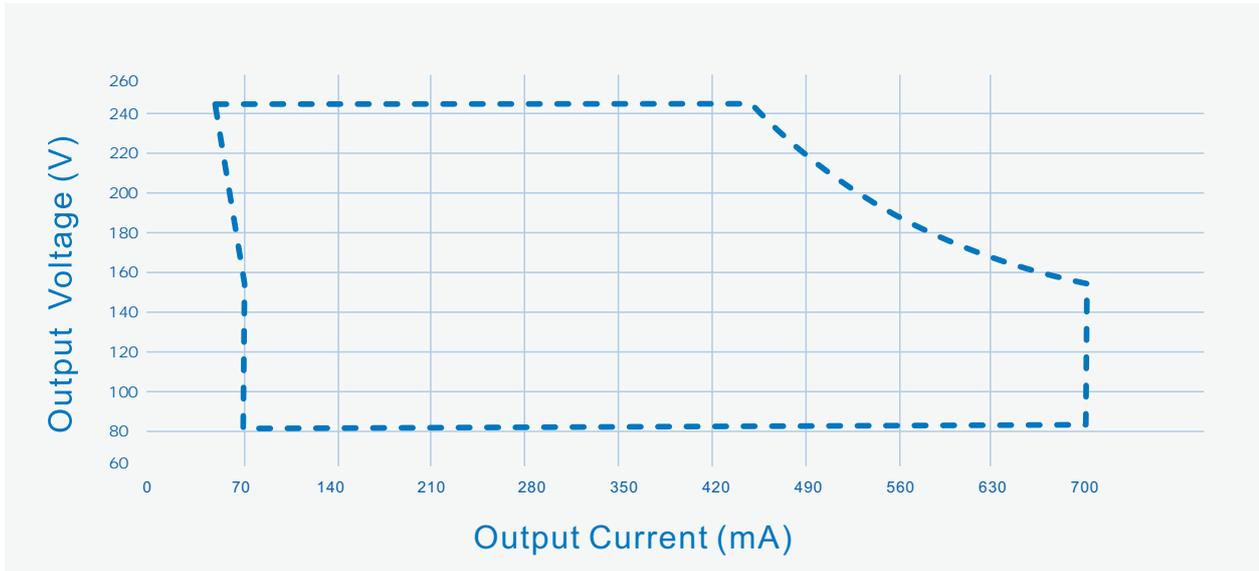

Vs. (Vin=230Vac)

Vs. (Vin=230Vac)



-----







NTC

(NTC)	T1 ( )		60		T1	LED
	T2 ( )		70		T2	LED
	T3 ( )		90		T3	LED
		10% loiset	20% loiset	100% loiset	20%	

NTC 10K-3950B/3435B


AC

AC

160-264Vac

AC  
AC

20Vac  
10V

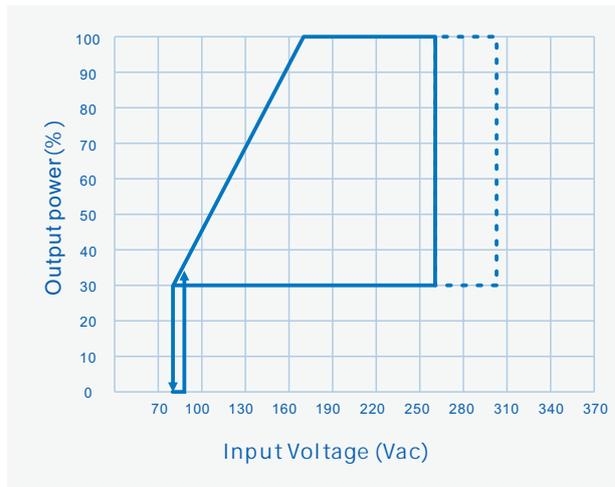

- 1.
- 2.





85  
5  
85  
6705  
88-288





GB 3873 83

1



